
Asteroid Redirect Mission Crewed Mission (ARCM) Concept Study



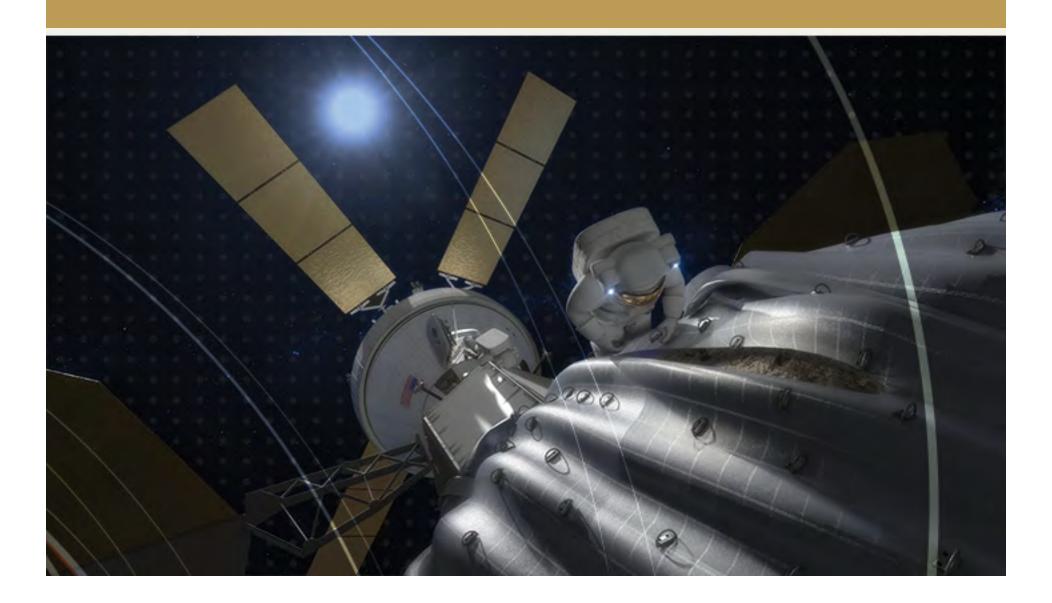

Asteroid Redirect Crewed Mission (ARCM) Assessment Summary from Mission Formulation Review

- Technical
 - Mission is Feasible there are no show stoppers identified
 - The design accommodates predicted Orion EM-2 performance with inclusion of Mission Kits
 - There are no significant changes to Orion/SLS Requirements
- Cost
 - The strategy leverages planned Orion exploration capabilities
 - Mission unique costs are limited to EVA tools, GFE to Robotic Mission, and Asteroid Sample Curation
- Schedule
 - Schedule is feasible
 - Mission Kit development leverages efforts in the Advanced Exploration Systems (AES)
 - Asteroid Redirect Robotic Vehicle (ARRV) delivered GFE items drive earliest need dates
- · Mission risks are mitigated with appropriate flight testing
 - Employs EM-1/2 flight test strategy
 - Leverages ISS as an Exploration test bed
 - Prior Shuttle Flight test of STORRM Rendezvous and Docking Sensors

Orion's broad exploration capabilities allow for execution of the Asteroid Retrieval Mission with only minor mission kit additions with a feasible cost/schedule. There are no significant Orion/SLS requirement changes for the Asteroid Mission.


Mission Objectives/Guiding Principles

Mission Objectives:


Orion will provide capability for crew to rendezvous with Asteroid Redirect Robotic spacecraft; extract asteroid sample; and return sample and crew safely to Earth.

Guiding Principles For Feasibility Study:

- Perform initial sample return mission in two launches:
 (1)Asteroid Redirect Robotic Spacecraft; and
 (2)Orion/SLS with Crew
- Minimize changes to Orion EM-2 Configuration
 - Provide additional Orion mission capability with add-on kits
 - Study based on SLS/Orion Baseline requirements
- Utilize SLS Block I Configuration for Orion launch vehicle
- Affordability is the key consideration in every design trade
- Utilize robotic spacecraft for Extra-Vehicular Activity (EVA) augmentation (e.g. tool stowage, handholds)
- Provide capabilities that enhance future exploration goals

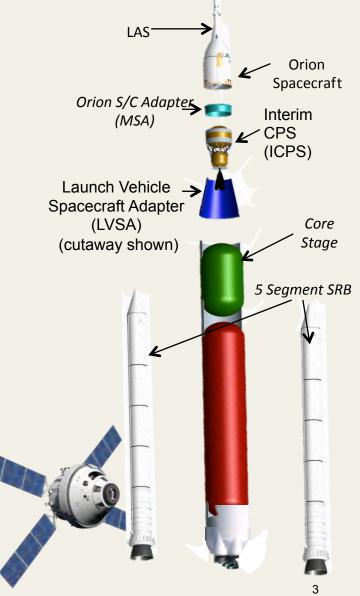


Mission Design Considerations All constraints currently satisfied for new MFR Reference Mission

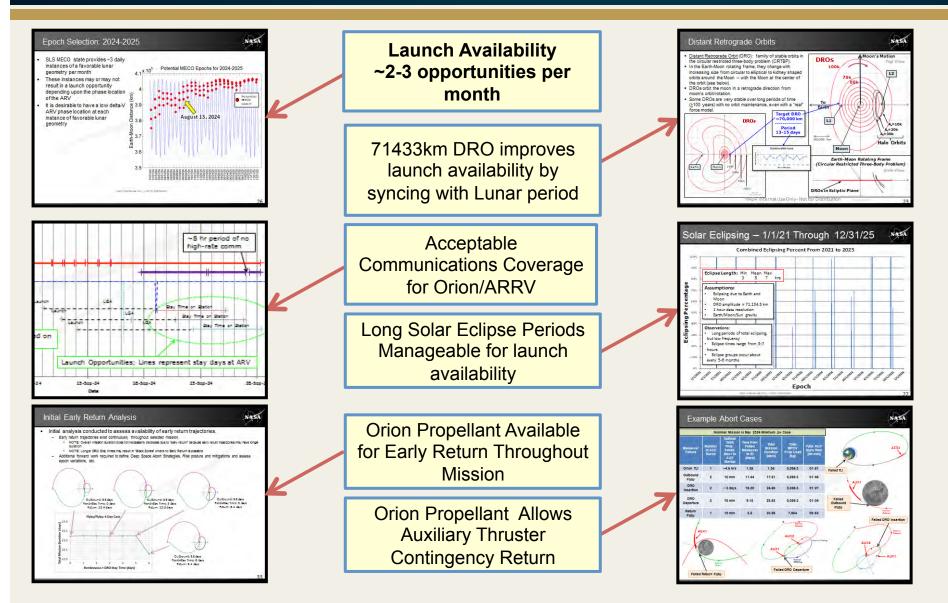


Asteroid Redirect Crewed Mission "Trade Space"

All variables interconnected via Mass Impact

- Mass Impact includes both Launch and Abort Landed mass
- Numerous possible solutions available based on combinations of selections
- Individual Packages developed to explain sensitivities on each variable
- Integrated Solutions demonstrate what combinations are feasible

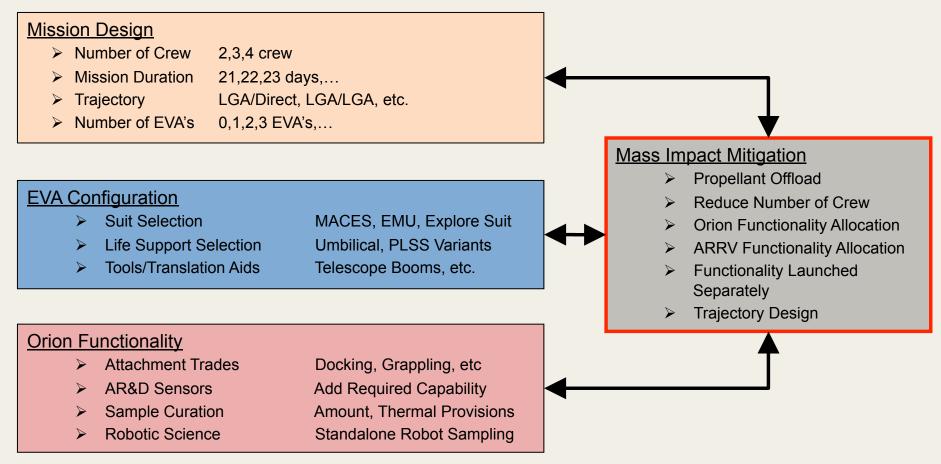

Reference Trajectory: Earliest Mission for 2009BD

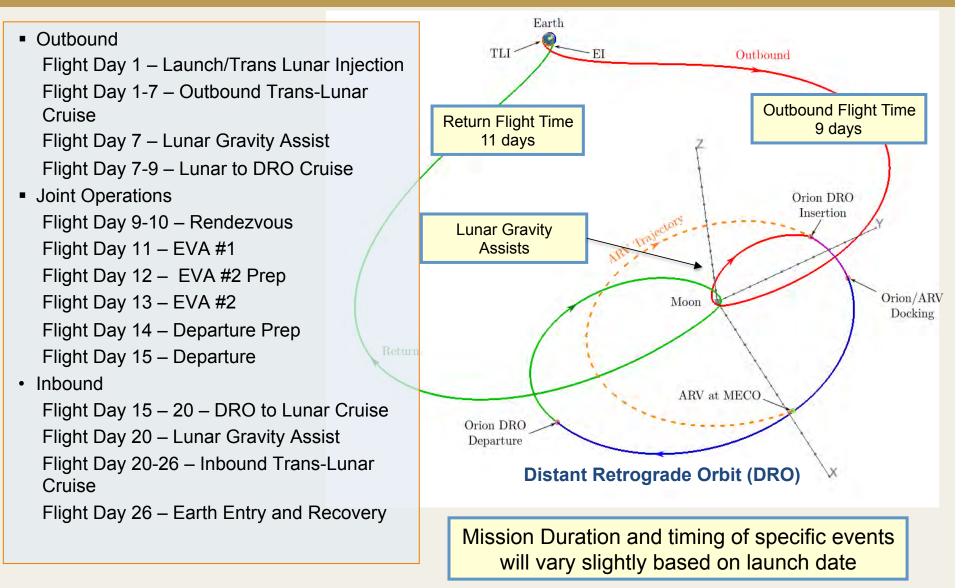


Contingency Trajectory Planning



MFR Reference Mission: May 2024, Min- ΔV				
Maneuver Failure	Number of Aux Burns	Total Mission Duration [days]		
Orion TLI	1 (1 1.36		
Outbound Flyby	2	17.57		
DRO Insertion	2	2 26.69		
DRO Departure	2	3 23.61		
Return Flyby	1	23.66		

All usable Orion Propellant Utilized in Abort Cases to minimize return duration


- Examined failure of Service Module (SM) Main Engine throughout mission as part of trajectory planning
- Orion SM contains substantial additional propellant above the nominal mission requirement and 30 days of crew consumables (O2, N2, food, etc.)
- Assessment concluded that Auxiliary Thrusters could complete the mission should SM Main engine fail although mission duration may be longer than nominal mission

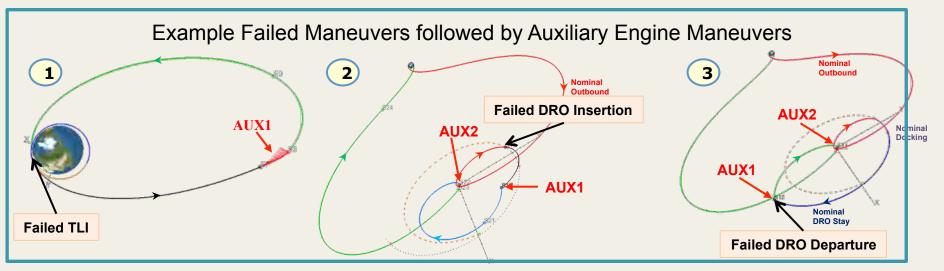



•

Assessment of Integrated Flight Attitude



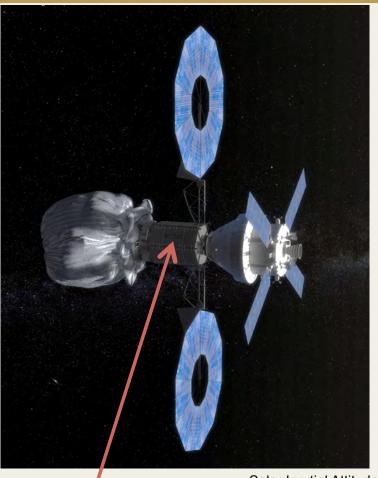

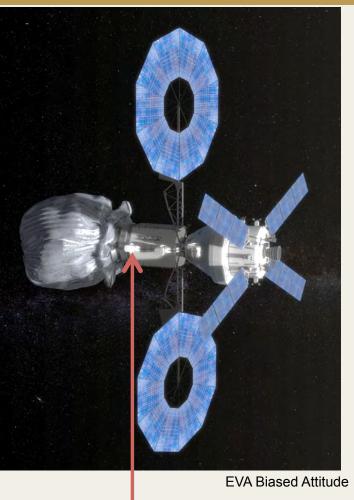



- Solar Inertial Attitude
- Extensive shading in unbiased solar inertial attitude
- Biasing attitude allows for adequate EVA lighting and thermal conditions
- Orion required to maneuver integrated vehicle to EVA attitude
 Asteroid Redirect Mission Mission Formulation Review For Public Release

Extravehicular Activity (EVA) Details

- Orion-based EVA with two Crewmembers
- Two EVAs + One Contingency
- Short Duration (~4 hours)



Suit and EVA Mission Kits




Four kits were identified to enable Orion Capsule-Based EVA capability

			Marrie Marr	
EVA Servicing and Recharge	EVA Tools, Translation Aids & Sample Container Kit	EVA Communications	Cabin Repress Kit	
Equipment necessary for multiple EVAs including recharge for PLSS water and oxygen, crew equipment, etc.	Standard and specialized tools to complete mission objectives	Repackaged PLSS radio that allows relay communication between EVA crew and ground	Provides enriched air for multiple repressurizations of the cabin without using Orion resources	
Based on ISS and Shuttle equipment	Leverage current ISS, heritage Apollo and analog tools; Evaluate prototype designs in NBL	Utilizes common radio design currently being developed for AES PLSS	Based on ISS tanks; Plan to mature concept in work	
Assumes GFE Development for EVA support kits				
Asteroid Redirect Mission • Mission F	ormulation Review • For Public Release		10	

MACES Capsule-Based EVA Development Plan

Leveraging existing AES, Orion and ISS investments

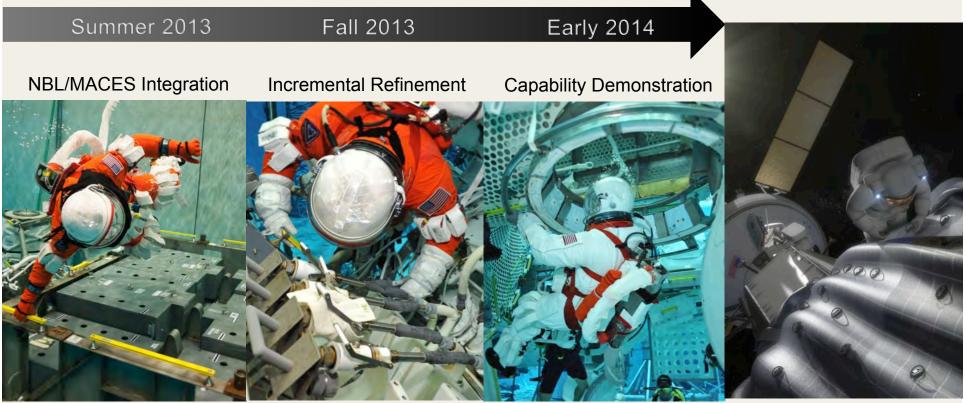

Suit: Baseline Orion MACES


Tasks: NBL Facility Integration NBL Weigh-Out Length: 2 hours Suit: Baseline Orion MACES & enhanced MACES

Tasks: Standard tool interfaces ISS Standard Tasks Length: Increasing to 4 hours Suit: Baseline Orion MACES & enhanced MACES

Tasks: Standard and Prototype Tools Mission Representative Tasks Length: 4 hours Full Mission Profile Test by end of 2014


Mission Kit Concept Enables Affordable Crewed Mission


- Docking System- Leverages International Space Station development of International Docking System Standard
- Relative Navigation Sensor Kit based on Space Shuttle Flight Tested Orion Sensors



Relative Navigation Sensor Kit

Orion Active Half of Docking Mechanism (extended)

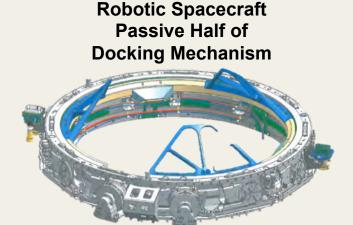





Mission Kit Stowage





View with Seats; PLSS & translation boom Stowage

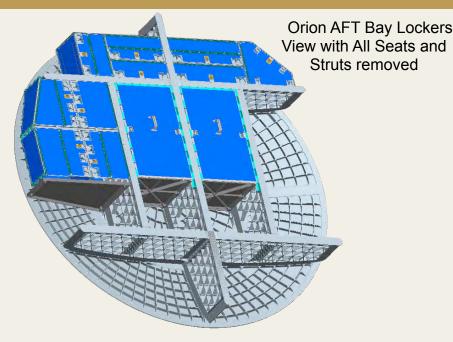





- Exploration PLSS backpacks and EVA translation boom stowed on unused Orion seat structure.
- Orion aft bay lockers stow smaller items (sample container, AR&D Sensors during launch, consumables)
- EVA Repress Tank stowed in the AFT bay
 - EVA accessible valve and plumbing is routed to the cabin for crew use

Analysis shows sufficient stowage exists to accommodate ARCM Mission Kit

Accommodations for Crewed Mission (Docking)

Identified minimum ARRV hardware to accommodate Orion communication, docking using International Docking System Standard (IDSS) and extensibility








Vehicle-to-Vehicle Comm

• Orion compatible low-rate S-band with transponder

Docking Target

- Augmented with features for relative navigation sensors
- Visual cues for crew monitoring



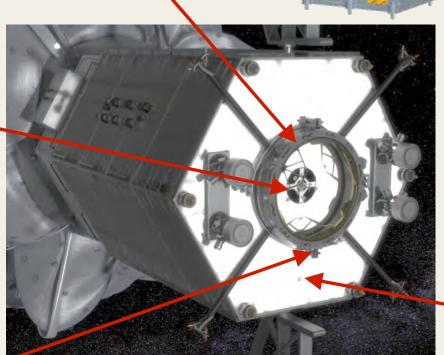

Reflectors

 Tracked by the LIDAR during rendezvous and docking



LED Status Lights


 Indicate the state of the ARRV systems, inhibits and control mode



Power and Data Transfer

 Transfer through connectors already part of the docking mechanism design; Supports extensibility

Accommodations for Crewed Mission (EVA)



Translation Booms for Asteroid EVA

EVA Translation Attach Hardware

 Circumference of Mission Module at base of Capture System and **ARV-Orion Interface**







Hand Rails

- Translation path to capture bag
- Ring of hand rails near capture bag

EVA Tether Points

- Hand-over-hand translation
- Temporary tool restraint
- Management of loose fabric folds





Further Utilization Enables Broader Participation to Achieve Exploration Goals



- Many possible opportunities for further utilization of the Asteroid
 - Testing of anchoring techniques
 - In-situ Resource Utilization (ISRU)
 Demonstration
 - Additional Asteroid Sample Collection
 - Lunar and Mars sample return
 - Scientific Experiments
 - Many other possibilities
- Realization of these opportunities requires additional payload delivery resources
 - Extending Commercial opportunities beyond low Earth orbit
 - Opportunity for International Partner Contributions
- Addition of utilization elements provide:
 - Extended crewed mission duration and additional EVA capability
 - Enhance crew safety with more robust systems and infrastructure

Several Industry RFI submissions suggest additional modules to enable greater asteroid utilization and extensibility to exploration goals.

Asteroid Redirect Mission • Mission Formulation Review • For Public Release


Moon size in image not to scale

Elements enable many opportunities integrated

Potential Utilization and Commercial Cargo

with initial Asteroid Initiative elements

Asteroid Redirect Mission builds upon Orion/SLS to Enable Global Exploration Roadmap

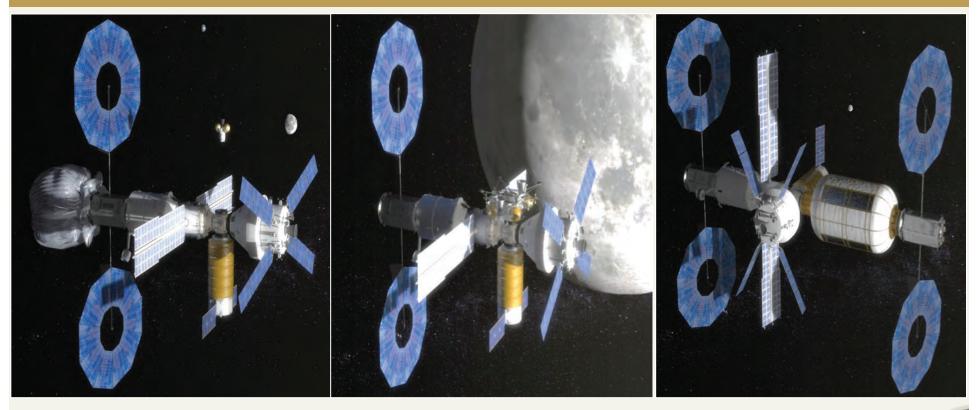


Asteroid Exploitation Missions

Lunar Surface Missions

Deep Space Missions



First Steps to Mars and Other Destinations

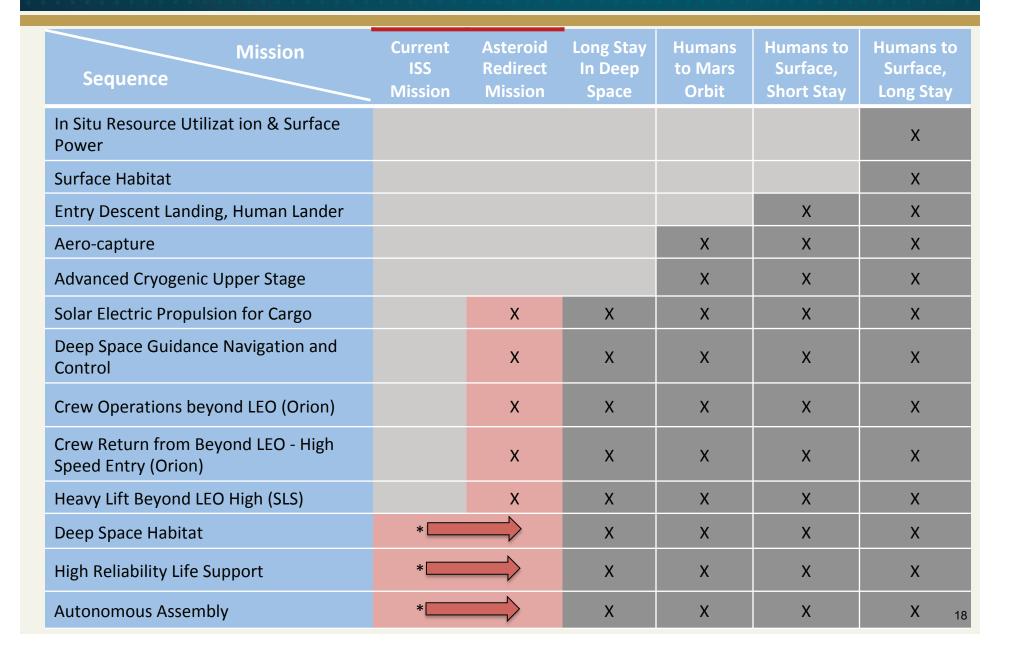

Benefits of Asteroid Redirect Mission

- NASA
- Provides challenging near term missions for human exploration to provide foundational capabilities for deep space exploration
 - SLS and Orion initial capabilities for deep space
 - Navigation and piloting operations of deep space vehicles for human missions
 - Mission Kits for in-space assembly (EVA, Docking and Rendezvous)
 - · Life support and deep space habitability
 - Complex ground and space operations, and sampling of small objects
- Exercises collaboration between human and robotic missions of exploration

Furthers science and technology

- Enhanced small bodies observation and characterization
- Advanced solar electric propulsion
- Asteroid sample return but this is not a science mission

Strong commercial application

- Advanced solar electric propulsion
- Planetary defense interests (testing of deflection techniques)
- Future utilization of in space resources