

# Optimal Fault-Tolerant Data Fusion in Sensor Networks: Fundamental Limits and Efficient Algorithms

Marian Temprana Alonso, Farhad Shirani , Sitharama S. Iyengar,  
 Florida International University,  
 Email: mtemp009@fiu.edu, fshirani@fiu.edu, iyengar@cis.fiu.edu

## Abstract

Distributed estimation in the context of sensor networks is considered, where distributed agents are given a set of sensor measurements, and are tasked with estimating a target variable. A subset of sensors are assumed to be faulty. The objective is to minimize i) the mean square estimation error at each node (accuracy objective), and ii) the mean square distance between the estimates at each pair of nodes (consensus objective). It is shown that there is an inherent tradeoff between the former and latter objectives. Assuming a general stochastic model, the sensor fusion algorithm optimizing this tradeoff is characterized through a computable optimization problem, and a Cramer-Rao type lower bound for the achievable accuracy-consensus loss is obtained. Finding the optimal sensor fusion algorithm is computationally complex. To address this, a general class of low-complexity Brooks-Iyengar Algorithms are introduced, and their performance, in terms of accuracy and consensus objectives, is compared to that of optimal linear estimators through case study simulations of various scenarios.

## I. INTRODUCTION

Distributed estimation arises naturally in various application scenarios including sensor networks [1]–[4], robotics [5], navigation, tracking and radar networks [6], and monitoring and surveillance applications [7]. The problem has been studied extensively in the literature under a range of assumptions and formulations. In recent years, there has been significant renewed interest in distributed estimation scenarios involving sensor fusion due to advances in sensor and communication technologies, which has enabled the application of massive non-homogeneous collections of sensors including radar, LiDAR, camera,

This work was supported in part by NSF grant CCF-2241057.

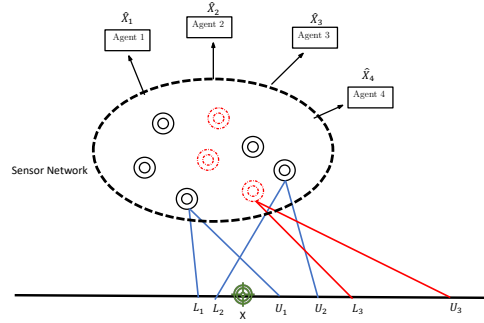


Fig. 1: Each sensor measures the target variable  $X$  and outputs a confidence interval. Non-faulty sensors are shown by solid black circles and faulty sensors by dashed red circles.

ultrasonic, GPS, IMU, and V2X in applications including tracking, navigation, and autonomous driving [8].

This paper considers the distributed estimation scenario shown in Figure 1, where  $m$  distributed agents receive a set of  $n$  sensor measurements, in the form of confidence intervals  $[L_{i,j}, U_{i,j}]$ ,  $i \in [n]$ ,  $j \in [m]$ , and are tasked with finding the best estimate of a target variable  $X$  with respect to fidelity criteria on both individual accuracy and collective consensus among sensors. In general, the sensor measurements are noisy, and additionally a subset of sensors may be faulty, where a faulty sensor provides measurements which are independent of the target variable. Furthermore, faulty sensors transmit independent measurements to each of the distributed agents. Faulty sensors model both sensor malfunction as well as adversarial interference in the sensor measurement and transmission phases [9], [10]. The distributed estimation system has two objectives: i) **Accuracy objective**: to minimize the mean square error of the estimate of the target variable by each agent, and ii) **Consensus objective**: to minimize the square distance between pairs of estimates of the target variable by each of the distributed agents. The former objective is a local performance objective focusing on the individual accuracy of each sensor, whereas the latter objective is a global performance objective focusing on the collective agreement among distributed sensors. The consensus objective is of interest in applications such as clock synchronization, robot convergence and gathering, autonomous driving, blockchain technologies, and distributed voting, among others. The consensus objective has been studied extensively in the context of the Byzantine Agreement Problem [11]–[14] as well as the study of consensus-based filters [15], [16].

The study of the distributed estimation scenario considered in this paper was initiated in [17], [18]. Marzullo proposed a sensor fusion algorithm in [19] and derived the corresponding worst case performance guarantees. An improved algorithm was proposed by Brooks and Iyengar (BI) in [20], and worst-case theoretical guarantees for both accuracy and consensus objectives were derived in [21]. It was shown

that the BI algorithm improves upon Marzullo’s algorithm in terms of the worst-case performance in the consensus objective. On the theory side, prior works have considered various other formulations of the distributed estimation problem under Bayesian, mean square error, and Dempster–Shafer theory paradigms [15], [16], [22], [23]. In this paper, we first formulate a general distributed estimation problem, and provide an analytical framework to evaluate the performance limits in terms of the accuracy and consensus objectives. We show that there is a fundamental tradeoff between these two objectives, and characterize the fusion operation optimizing the tradeoff in the form of a convex optimization problem. Furthermore, we provide a lower bound on the achievable accuracy-consensus loss. The bound is quantified by the *average Fisher information* of the sensor output variables and is obtained via a Cramer-Rao type inequality. Analytical characterization of the fusion operation optimizing the aforementioned tradeoff requires prior knowledge of the underlying statistics, which is not possible in many real-world applications. Furthermore, even in presence of accurate estimates of the underlying statistics, deriving the optimal decision function has high computational complexity. In the second part of the paper, we propose a generalized class of practical low-complexity Brooks-Iyengar fusion algorithms and evaluate their performance through various simulations of practical scenarios. The main contributions of this work are summarized below:

- To characterize a tradeoff in the accuracy and consensus objectives and to provide a computable optimization problem for finding the fusion algorithm optimizing this tradeoff.
- To provide a Cramer-Rao type bound on the performance of the optimal algorithm in terms of accuracy and consensus.
- To introduce a generalized class of BI algorithms (GBI).
- To prove the optimality of the GBI algorithms, in terms of the accuracy objective, under specific statistical assumptions.
- To provide case study simulations of the performance of the proposed algorithms.

*Notation:* The set  $\{1, 2, \dots, n\}, n \in \mathbb{N}$  is represented by  $[n]$ . An  $n$ -length vector is written as  $[x_i]_{i \in [n]}$  and an  $n \times m$  matrix is written as  $[h_{i,j}]_{i,j \in [n] \times [m]}$ . We write  $\mathbf{x}$  and  $\mathbf{h}$  instead of  $[x_i]_{i \in [n]}$  and  $[h_{i,j}]_{i,j \in [n] \times [m]}$ , respectively, when the dimension is clear from context. The vector  $\mathbf{e}_m$  is the  $m$ -length all-ones vector. Sets are denoted by calligraphic letters such as  $\mathcal{X}$ .  $\Phi$  represent the empty set.  $\mathbb{B}$  denotes the Borel  $\sigma$ -field. For the event  $\mathcal{E}$ , the variable  $\mathbb{1}(\mathcal{E})$  denotes the indicator of the event. For random variable  $X$  with probability space  $(\mathcal{X}, \mathbb{F}_X, P_X)$ , the Hilbert space of functions of  $X$  with finite variance is denoted by  $\mathcal{L}_2(X)$ .

## II. PROBLEM FORMULATION

We consider a distributed estimation problem involving  $m$  agents and  $n$  sensors. In the most general formulation, each agent is tasked with estimating the target variable  $X$  defined on the probability space

$(\mathbb{R}, \mathbb{B}, P_X)$ , where  $\mathbb{B}$  denotes the Borel  $\sigma$ -algebra. Each sensor measures the target variable  $X$  separately, and the measurement output is assumed to be in the form of an interval  $[L, U]$ , where  $L < U$ . The  $i$ th sensor transmits the pair  $(L_{i,j}, U_{i,j})$  to the  $j$ th agent, where  $i \in [n], j \in [m]$  and  $L_{i,j} \leq U_{i,j}$ . This is formalized below.

**Definition 1 (Distributed Estimation Setup).** A distributed estimation setup is characterized by the tuple  $(n, m, P_{X,(L_{i,j}, U_{i,j})_{i \in [n], j \in [m]}})$ , where  $n, m \in \mathbb{N}$  and  $P_{X,(L_{i,j}, U_{i,j})_{i \in [n], j \in [m]}}$  is a probability measure defined on  $\mathbb{R}^{nm+1}$  such that  $P(L_{i,j} \leq U_{i,j}, i \in [n], j \in [m]) = 0$ .

The fusion algorithm is formally defined below.

**Definition 2 (Fusion Algorithm).** For a distributed estimation setup characterized by the tuple  $(n, m, P_{X,(L_{i,j}, U_{i,j})_{i \in [n], j \in [m]}})$ , a fusion algorithm  $\mathbf{f}$  consists of a collection of functions  $f_j : \mathbb{R}^{2n} \rightarrow \mathbb{R}, j \in [m]$ . The estimate of  $X$  at the  $j$ th agent is  $\widehat{X}_j \triangleq f_j(L_{i,j}, U_{i,j}, i \in [n]), j \in [m]$ .

The fusion algorithm is evaluated with respect to an accuracy objective and a consensus objective as formalized below.

**Definition 3 (Fusion Objectives).** For a given a distributed estimation setup  $(n, m, P_{X,(L_{i,j}, U_{i,j})_{i \in [n], j \in [m]}})$  and fusion algorithm  $\mathbf{f} = (f_j(\cdot), j \in [m])$ , the accuracy is parametrized by the vector  $(mse(f_j), j \in [m])$ , where:

$$mse(f_j) \triangleq \mathbb{E} \left( (X - \widehat{X}_j)^2 \right), \quad j \in [m].$$

The consensus is parametrized by the vector  $(cns(f_j, f_{j'}), j, j' \in [m])$ , where:

$$cns(f_j, f_{j'}) \triangleq \mathbb{E} \left( (\widehat{X}_j - \widehat{X}_{j'})^2 \right), \quad j, j' \in [m].$$

Given parameter  $\lambda \in \mathbb{R}$  such that  $0 \leq \lambda \leq 1$ , the fusion algorithm  $\mathbf{f}_\lambda^*$  is called  $\lambda$ -optimal if it is the solution to the following optimization problem:

$$\mathbf{f}_\lambda^* = \arg \min_{\mathbf{f}=(f_j)_{j \in [m]}} \lambda \sum_{j \in [m]} mse(f_j) + \frac{\bar{\lambda}}{m-1} \sum_{\substack{j, j' \in [m] \\ j \neq j'}} cns(f_j, f_{j'}), \quad (1)$$

where the minimum is taken over all  $\mathbf{f} = (f_j)_{j \in [m]}$  such that  $f_j \in \mathcal{L}_2(\prod_{i \in [n]} L_{i,j} \times U_{i,j}), j \in [m]$  and  $\bar{\lambda} \triangleq 1 - \lambda$ .

In Section III, we evaluate the accuracy-consensus tradeoff under the general distributed estimation model described above. We characterize the  $\lambda$ -optimal sensor fusion algorithm in the form of a computable optimization problem. The optimization requires knowledge of the underlying distribution and has high computational complexity. In Section IV, we restrict our study to a specific subset of distributed estimation scenarios involving faulty sensor measurements, and provide practical fault-tolerant sensor fusion

algorithms with low computational complexity whose performance is evaluated through simulations in Section V.

**Remark 1.** *It can be noted that the objective function in the optimization in Equation (1) is a convex function and the Hilbert space  $\mathcal{L}_2(\prod_{i \in [n]} L_{i,j} \times U_{i,j})$  is a convex set. So, Equation (1) describes a convex optimization problem and a unique  $\lambda$ -optimal fusion algorithm  $\mathbf{f}_\lambda^*$  always exists.*

**Remark 2.** *Define the set of all achievable accuracy and consensus values  $\mathcal{O} \triangleq \{(m, c) \in \mathbb{R}^2 | \exists \mathbf{f} \in \mathcal{L}_2(\prod_{i \in [n]} L_{i,j} \times U_{i,j}) : \text{mse}(\mathbf{f}) = m, \text{cns}(\mathbf{f}) = c\}$ , where  $\text{mse}(\mathbf{f}) \triangleq \sum_j \text{mse}(f_j)$  and  $\text{cns}(\mathbf{f}) \triangleq \sum_{j,j'} \text{cns}(f_j, f_{j'})$ . It is straightforward to argue that  $\mathcal{O}$  is a convex set, so that it is characterized by its supporting hyperplanes [24]. So, characterizing  $\mathcal{O}$  is equivalent to solving (1) for all  $\lambda \in [0, 1]$ .*

**Remark 3.** *The 1-optimal fusion algorithm is the optimal estimator in the absence of a consensus objective. It is well-known that, due to the orthogonality principle, we have  $\mathbf{f}_1^* = (\mathbb{E}(X|L_{i,j}, U_{i,j}, i \in [n]), j \in [m])$ , e.g., see [25]. On the other hand, the 0-optimal fusion algorithm only maximizes consensus, so that all of the estimators output the same constant value. In the sequel, we wish to characterize the accuracy-consensus tradeoff for  $\lambda \in (0, 1)$ .*

### III. ANALYTICAL DERIVATION OF THE OPTIMAL FUSION ALGORITHM

In this section, we derive an analytical expression of the  $\lambda$ -optimal fusion algorithm. The analytical solution requires knowledge of the underlying probability distribution defined in (6), and the optimization is computationally complex. In Section IV, we address this by introducing low-complexity practical fusion algorithms with theoretical performance guarantees under specific statistical assumptions. The following provides the main result of this section.

**Theorem 1 (Optimal Fusion Algorithm).** *For a distributed estimation setup characterized by the tuple  $(n, m, P_{X, (L_{i,j}, U_{i,j})_{i \in [n], j \in [m]}})$ , and given  $0 \leq \lambda \leq 1$ , the  $\lambda$ -optimal fusions algorithm  $\mathbf{f}_\lambda^* = (f_j^*(\cdot), j \in [m])$  is given by  $f_j^*(\cdot) = c_j^* \bar{f}_j^*(\cdot) + b_j^*$ ,  $j \in [m]$  for constant vectors  $\mathbf{c}^* \triangleq (c_1^*, c_2^*, \dots, c_m^*)$ ,  $\mathbf{b}^* = (b_1^*, b_2^*, \dots, b_m^*)$  and zero-mean, unit-variance functions  $\bar{\mathbf{f}}^*(\cdot) \triangleq (\bar{f}_1^*, \bar{f}_2^*, \dots, \bar{f}_m^*)$  given by:*

$$\bar{\mathbf{f}}^* = \arg \max_{\bar{\mathbf{f}} \in \bar{\mathcal{F}}} \Theta(AA^t)^{-1} \Theta^t, \quad \mathbf{c}^* = A^{-1} \Theta^t, \quad \mathbf{b}^* = \mathbb{E}(X) \mathbf{e}_m, \quad (2)$$

where  $A = [a_{j,j'}]_{j,j' \in [m]}$ ,  $a_{j,j'} \triangleq \mathbb{1}(j = j') - \frac{\lambda}{(m-1)} \mathbb{1}(j \neq j') \mathbb{E}(\bar{f}_j \bar{f}_{j'})$ ,  $j, j' \in [m]$ ,  $\Theta = [\theta_j]_{j \in [m]}$ ,  $\theta_j \triangleq \lambda \mathbb{E}(X \bar{f}_j)$ ,  $j \in [m]$ , and  $\bar{\mathcal{F}}$  consists of all vectors of zero-mean, unit-variance functions, i.e.,  $(\bar{f}_j(\cdot))_{j \in [m]} \in \bar{\mathcal{F}}$  iff  $\text{Var}(\bar{f}_j(L_{i,j}, U_{i,j}, i \in [n])) = 1$ ,  $\mathbb{E}(\bar{f}_j(L_{i,j}, U_{i,j}, i \in [n])) = 0$ ,  $j \in [m]$ .

To prove the theorem, given a fusion algorithm  $\mathbf{f}(\cdot) = (f_j(\cdot), j \in [m])$ , we decompose each  $f_j(\cdot)$  into an amplitude  $c_j$ , a unit-variance function  $\bar{f}_j$  capturing the *direction* of  $f_j(\cdot)$ , and a bias  $b_j$  as  $f_j(\cdot) = c_j \bar{f}_j(\cdot) + b_j$ , where  $c_j > 0$ ,  $b_j \in \mathbb{R}$ ,  $\text{Var}(\bar{f}_j(\cdot)) = 1$ . First, we fix  $\bar{\mathbf{f}}(\cdot), j \in [m]$  and  $\mathbf{c}$  and optimize  $\mathbf{b}$  for a given  $(\bar{\mathbf{f}}(\cdot), \mathbf{c})$ . The component  $c_j \bar{f}_j(\cdot)$  can be viewed as an element in the Hilbert space  $\mathcal{L}_2(\prod_{i \in [n]} L_{i,j} \times U_{i,j})$ , where  $c_j$  is its amplitude and  $\bar{f}_j(\cdot)$  determines its direction.

**Proposition 1 (Optimal Bias Vector).** *For a fixed  $\bar{\mathbf{f}} \in \bar{\mathcal{F}}$  and  $\bar{\mathbf{c}} > 0$ , the bias vector  $\mathbf{b}^*$  optimizing Equation (1) is given by:*

$$\mathbf{b}^* = \mathbb{E}(X)\mathbf{e}_m.$$

*Proof.* The proof follows by noting that

$$\text{mse}(f_j) = \mathbb{E}\left(\left(X - \mathbb{E}(X) - \widehat{X}_j + \mathbb{E}(\widehat{X}_j)\right)^2\right) + \left(\mathbb{E}(X) - \mathbb{E}(\widehat{X}_j)\right)^2,$$

which is minimized if  $\mathbb{E}(X) = \mathbb{E}(\widehat{X}_j)$ . Similarly,

$$\text{cns}(f_j, f_{j'}) = \mathbb{E}\left(\left(\widehat{X}_j - \mathbb{E}(\widehat{X}_j) - \widehat{X}_{j'} + \mathbb{E}(\widehat{X}_{j'})\right)^2\right) + \left(\mathbb{E}(\widehat{X}_j) - \mathbb{E}(\widehat{X}_{j'})\right)^2,$$

which is minimized if  $\mathbb{E}(\widehat{X}_j) = \mathbb{E}(\widehat{X}_{j'})$ . So, all terms in (1) are minimized simultaneously if  $\mathbb{E}(\widehat{X}_j) = \mathbb{E}(X), j \in [m]$ .  $\square$

In the rest of the paper, without loss of generality, we assume  $\mathbb{E}(X) = 0$  so that  $\mathbf{b}^* = 0$ . Next, we fix  $\bar{f}_j(\cdot)$  and optimize the amplitude vector  $\mathbf{c} = (c_j, j \in [m])$ . The following proposition characterizes the optimal amplitude vector  $\mathbf{c}$ .

**Proposition 2 (Optimal Amplitude Vector).** *For a fixed  $\bar{\mathbf{f}} \in \bar{\mathcal{F}}$ , the amplitude vector  $\mathbf{c}^*$  optimizing (1) is given by:*

$$\mathbf{c}^* = A^{-1}\Theta^t,$$

where  $A$  and  $\Theta$  are defined in Theorem 1.

*Proof.* Let us fix  $\bar{\mathbf{f}}$ , and consider Equation (1):

$$\arg \min_{\mathbf{c}} \lambda \sum_{j \in [m]} \text{mse}_j(c_j \bar{f}_j) + \frac{\bar{\lambda}}{m-1} \sum_{\substack{j, j' \in [m] \\ j \neq j'}} \text{cns}_{j, j'}(c_j \bar{f}_j, c_{j'} \bar{f}_{j'}).$$

For  $j \in [m]$ , we take the derivative of the objective function with respect to  $c_j$  and set it equal to 0. Note that

$$\frac{\partial}{\partial c_j} \text{mse}(c_j \bar{f}_j) = \mathbb{1}(j = j')(2c_j \mathbb{E}(\bar{f}_j^2) - 2\mathbb{E}(X \bar{f}_j)) = \mathbb{1}(j = j')(2c_j - 2\mathbb{E}(X \bar{f}_j)).$$

Furthermore,

$$\frac{\partial}{\partial c_j} \text{cns}(c_{j'} \bar{f}_{j'}, c_{j''} \bar{f}_{j''}) = \mathbb{1}(\exists j_d : \{j', j''\} = \{j, j_d\})(2c_j - 2c_{j_d} \mathbb{E}(\bar{f}_j \bar{f}_{j_d})).$$

Let  $L_\lambda$  denote the objective function in (1). We have:

$$\frac{\partial}{\partial c_j} L_\lambda = 2\lambda(c_j - \mathbb{E}(X\bar{f}_j)) + \frac{2\bar{\lambda}}{m-1} \sum_{j' \neq j} (c_j - c_{j'} \mathbb{E}(\bar{f}_j \bar{f}_{j'})), \quad (3)$$

for all  $j \in [m]$ . This provides a system of  $m$  linear equalities, and solving for  $\mathbf{c}^*$  yields,  $\mathbf{c}^* = A^{-1}\Theta^t$  as desired.  $\square$

To complete the proof of Theorem 1, we find the optimal  $\bar{\mathbf{f}}(\cdot)$  given  $\mathbf{c}^* = A^{-1}\Theta^t$ .

**Proposition 3 (Optimal Direction Vector).** *Given an arbitrary  $\bar{\mathbf{f}} \in \bar{\mathcal{F}}$ , let the corresponding amplitude vector be  $\mathbf{c} = A^{-1}\Theta^t$ . Then,  $\bar{\mathbf{f}}^* \in \bar{\mathcal{F}}$  optimizing (1) is given by:*

$$\bar{\mathbf{f}}^* = \arg \max_{\bar{\mathbf{f}} \in \bar{\mathcal{F}}} \Theta(AA^t)^{-1}\Theta^t,$$

where  $A$  and  $\Theta$  are defined in Theorem 1.

*Proof.* Let  $L_\lambda$  denote the objective function in (1). We have:

$$L_\lambda = \lambda \sum_j \mathbb{E}(X^2) + \lambda \sum_j c_j^2 - 2\lambda \sum_j c_j \mathbb{E}(X\bar{f}_j) + 2\bar{\lambda} \sum_j c_j^2 - 2\frac{\bar{\lambda}}{m-1} \sum_{\substack{j, j' \\ j \neq j'}} c_j c_{j'} \mathbb{E}(\bar{f}_j \bar{f}_{j'})$$

Note that

$$2\bar{\lambda} \sum_j c_j^2 - 2\frac{\bar{\lambda}}{m-1} \sum_{\substack{j, j' \\ j \neq j'}} c_j c_{j'} \mathbb{E}(\bar{f}_j \bar{f}_{j'}) = \sum_j c_j \left( \sum_{j' \neq j} \frac{2\bar{\lambda}}{m-1} (2c_j - c_{j'} \mathbb{E}(\bar{f}_j \bar{f}_{j'})) \right)$$

Using (3), we can see that this is equal to  $-2\lambda(c_j - \mathbb{E}(X\bar{f}_j))$ . So,  $L_\lambda = \lambda \sum_j (\mathbb{E}(X^2) - c_j^2)$ . As a result, minimizing  $L_\lambda$  is equivalent to maximizing  $\sum_j c_j^2$ . Since  $\mathbf{c} = A^{-1}\Theta^t$ , this is equivalent to maximizing  $(A^{-1}\Theta^t)'A^{-1}\Theta^t = \Theta(AA^t)^{-1}\Theta^t$ .  $\square$

From Theorem 1 it follows that the optimal fusion algorithm is given by  $\arg \max_{\bar{\mathbf{f}} \in \bar{\mathcal{F}}} \Theta(AA^t)^{-1}\Theta^t$ . This optimization, taken over all zero-mean and unit-variance functions, can be reformulated as an optimization over real-valued matrices as follows. Let  $\mathbf{F} = \{\bar{f}_{j,1}, \bar{f}_{j,2}, \dots\}$  be an orthonormal basis for the Hilbert space  $\mathcal{L}_2(\prod_{i \in [m]} L_{i,j} \times U_{i,j})$ ,  $j \in [m]$ . Then, the optimization can be re-written as follows:

$$\bar{\mathbf{f}}^* = \arg \max_{(\epsilon_{j,k})_{j \in [m], k \in \mathbb{N}^+ : \sum_{k=1}^{\infty} \epsilon_{j,k}^2 = 1}} \Theta(AA^t)^{-1}\Theta^t, \quad (4)$$

where  $f_{-j}(\cdot) = \sum_{k=1}^{\infty} \epsilon_{i,j} f_{-j,k}$ ,  $j \in [m]$ , so that  $a_{j,j'} = \mathbb{1}(j = j') - \mathbb{1}(j \neq j') \frac{\bar{\lambda}}{m-1} \sum_{k,k'} \epsilon_{j,k} \epsilon_{j',k'} \mathbb{E}(f_{-j,k} f_{-j',k'})$ ,  $j, j' \in [m]$  and  $\theta_j = \sum_k \epsilon_{j,k} \mathbb{E}(X f_{-j,k})$ .

As mentioned in Remark 3, it is well-known that the 1-optimal fusion algorithm is given as

$$\mathbf{f}_1^* = (\mathbb{E}(X|L_{i,j}, U_{i,j}, i \in [n]), j \in [m]).$$

This result can be re-derived from Equation (4) by taking the orthonormal basis  $\mathbf{F}$  such that

$$\bar{f}_{j,1} = \frac{\mathbb{E}(X|L_{i,j}, U_{i,j}, i \in [n])}{\sqrt{\text{Var}(\mathbb{E}(X|L_{i,j}, U_{i,j}, i \in [n]))}}, j \in [m].$$

It suffices to show that  $\epsilon_{1,j} = 1, \epsilon_{k,j} = 0, j \in [m], k \neq 1$ . To see this, note that since  $\lambda = 1$ , we have  $a_{j,j'} = \mathbb{1}(j = j'), j, j' \in [m]$  so that  $A$  is a diagonal matrix, and  $\Theta = [\epsilon_{1,1}, \epsilon_{2,1}, \dots, \epsilon_{m,1}]$  due to the fact that  $X$  is orthogonal to the subspace generated by  $\{\bar{f}_{j,2}, \bar{f}_{j,3}, \dots\}$  which follows by the smoothing property of expectation, the fact that  $\bar{f}_{j,1} = \frac{\mathbb{E}(X|L_{i,j}, U_{i,j}, i \in [n])}{\sqrt{\text{Var}(\mathbb{E}(X|L_{i,j}, U_{i,j}, i \in [n]))}}$ , and that  $\mathbf{F}$  is an orthonormal basis. So,  $\Theta(AA^t)^{-1}\Theta^t = \sum_{j \in [m]} \epsilon_{j,1}^2$ , which is maximized by taking  $\epsilon_{j,1} = 1, \epsilon_{j,k} = 0, j \in [m], k \neq j$ , since we must have  $\sum_{k=1}^{\infty} \epsilon_{j,k}^2 = 1, j \in [m]$  in the constrained optimization in Equation (4).

#### A. Cramer-Rao Type Bound on Accuracy-Consensus Loss

In the previous section, we characterized the  $\lambda$ -optimal fusion algorithm. Next, we provide a Cramer-Rao type bound on the performance of the algorithm with respect to the accuracy-consensus loss. To present the resulting bound concisely, we make additional assumptions on the structure of the sensor measurements' statistics. Specifically, we assume that a subset  $\tau \in [n]$  of the sensors are faulty, and the rest of the sensors are non-faulty. Faulty sensors report independent measurements to each agent, that is, if the  $i$ th sensor is faulty, the pair  $(L_{i,j}, U_{i,j})$  is independent of  $(L_{i',j'}, U_{i',j'}), (i, j) \neq (i', j')$  and  $X$ . Otherwise, if the sensor is non-faulty, the sensor reports the same measurement to all agents. That is, there exists  $L_i, U_i$  such that  $L_{i,j} = L_i, j \in [m]$  and  $U_{i,j} = U_i, j \in [m]$ , and  $X$  is in the interval  $[L_i, U_i]$  with probability one. It is assumed that each sensor is equally likely to be faulty, i.e., the  $\tau$  faulty sensors are chosen randomly and uniformly among the  $n$  sensors. Formally, we consider a joint distribution  $P_{X, (\tilde{L}_i, \tilde{U}_i)_{i \in [n]}}$  defined on  $\mathbb{R}^{2n+1}$  such that  $P(X \in [\tilde{L}_i, \tilde{U}_i]) = 1, i \in [n]$ . The pair  $(\tilde{L}_i, \tilde{U}_i), i \in [n], j \in [m]$  represent the *ground-truth* measurement at the  $i$ th sensor. The joint measure on  $X, (L_{i,j}, U_{i,j})_{i \in [n], j \in [m]}$  is given as follows:

$$\begin{aligned} & P_{X, (L_{i,j}, U_{i,j})_{i \in [n], j \in [m]}}(\mathcal{A}, (\mathcal{L}_{i,j}, \mathcal{U}_{i,j})_{i \in [n], j \in [m]}) \\ &= \sum_{\mathbf{l} \in \mathcal{T}_{\tau}^n} \frac{1}{\binom{n}{\tau}} P_X(\mathcal{A}) \prod_{j:t_j=1, i \in [m]} P_{\tilde{L}_i, \tilde{U}_i}(\mathcal{L}_{i,j}, \mathcal{U}_{i,j}) \times \\ & \quad \prod_{j:t_j=0} P_{\tilde{L}_i, \tilde{U}_i|X} \left( \bigcap_{i \in [n]} \mathcal{L}_{i,1}, \bigcap_{i \in [n]} \mathcal{U}_{i,1} | \mathcal{A} \right), \end{aligned} \tag{5}$$

where  $\mathcal{A}, (\mathcal{L}_{i,j}, \mathcal{U}_{i,j}) \in \mathbb{B}$  and  $\mathcal{T}_{\tau}^n$  is the set of  $n$ -length binary vectors with Hamming weight equal to  $\tau$ .



**Theorem 2.** For a distributed estimation setup described above, assume that the non-faulty sensors' outputs are jointly independent given  $X$ . For  $\lambda \in [0, 1]$ , define the accuracy-consensus loss as:

$$L_\lambda^* \triangleq \min_{f=(f_j)_{j \in [m]}} \lambda \sum_{j \in [m]} \text{mse}(f_j) + \frac{\bar{\lambda}}{m-1} \sum_{\substack{j, j' \in [m] \\ j \neq j'}} \text{cns}(f_j, f_{j'}).$$

Then,

$$\frac{m^2 \lambda}{\bar{I}_F(X)} \leq L_\lambda^*, \quad \lambda \in [0, 1],$$

where  $\bar{I}_F(X)$  is the average Fisher information defined as:

$$\bar{I}_F(X) \triangleq \sum_{\substack{\mathcal{I} \in \mathcal{T}_\tau^n \\ \tau}} \frac{1}{\binom{n}{\tau}} \sum_{j: t_j=0} \mathbb{E} \left( \left( \frac{\partial \log f_{\tilde{L}, \tilde{U}}(\cdot|X)}{\partial X} \right)^2 \right),$$

where the expectation is taken over  $X, (L_{i,j}, U_{i,j})_{i \in [n], j \in [m]}$ . Particularly, if the non-faulty sensors' outputs are identically distributed given  $X$ , we have:

$$\frac{m^2 \lambda}{(n-\tau) \mathbb{E}_{X, \tilde{L}, \tilde{U}} \left( \left( \frac{\partial \log f_{\tilde{L}, \tilde{U}}(\cdot|X)}{\partial X} \right)^2 \right)} \leq L_\lambda^*.$$

*Proof.* The proof follows by steps similar to that of the Cramer-Rao bound [26]. We provide an outline in the following. Let  $f_j, j \in [m]$  be optimal fusion algorithms for a genie-aided version of the problem where the agents are aware of the faulty sensors. Consider the function:

$$L(X, (L_{i,j}, U_{i,j})_{i \in [n], j \in [m]}) = \sqrt{\lambda} \sum_{j \in [m]} (f_j - X) + \sqrt{\frac{\bar{\lambda}}{m-1}} \sum_{\substack{j, j' \in [m] \\ j \neq j'}} (f_j - f_{j'}).$$

Note that by construction for the optimal fusion algorithm we have  $\mathbb{E}(L|X) = 0$  since the optimal fusion algorithm is unbiased as shown in Proposition 1. So,  $\frac{\partial \mathbb{E}(L|X)}{\partial X} = 0$ . Note that  $f_j, j \in [m]$  is not a function of  $X$  and is only a function of  $(L_{i,j}, U_{i,j})_{i \in [n], j \in [m]}$ . So,

$$\begin{aligned} m \sqrt{\lambda} &= \int_{(l_{i,j}, u_{i,j})_{i \in [n], j \in [m]}} L(X, (l_{i,j}, u_{i,j})_{i \in [n], j \in [m]}) \frac{\partial f_{(L_{i,j}, U_{i,j})_{i \in [n], j \in [m]}|X}((l_{i,j}, u_{i,j})_{i \in [n], j \in [m]}|X)}{\partial X} d(l_{i,j}, u_{i,j})_{i \in [n], j \in [m]} \\ &= \int_{(l_{i,j}, u_{i,j})_{i \in [n], j \in [m]}} L(X, (l_{i,j}, u_{i,j})_{i \in [n], j \in [m]}) \frac{\partial \prod_{i \in [n], j \in [m]} f_{L_{i,j}, U_{i,j}}(l_{i,j}, u_{i,j}|X)}{\partial X} d(l_{i,j}, u_{i,j})_{i \in [n], j \in [m]} \\ &\leq \sum_{\substack{\mathcal{I} \in \mathcal{T}_\tau^n \\ \tau}} \frac{1}{\binom{n}{\tau}} \sum_{j: t_j=0} \int_{(l_{i,j}, u_{i,j})_{i \in [n], j \in [m]}} L(X, (l_{i,j}, u_{i,j})_{i \in [n], j \in [m]}) \frac{\partial \prod_{j: t_j=0} f_{L_{i,j}, U_{i,j}}(l_{i,j}, u_{i,j}|X)}{\partial X} d(l_{i,j}, u_{i,j})_{i \in [n], j \in [m]} \end{aligned}$$

where in the last step, we have used the genie-aided assumption to remove the inputs from faulty sensors. We bound each of the terms in the two summations in  $L$  separately. For instance, let us consider  $\sqrt{\lambda}(f_j - X)$  for some  $j \in [m]$ . Then,

$$\begin{aligned} & \sum_{\underline{l} \in \mathcal{T}_\tau^n} \frac{1}{\binom{n}{\tau}} \sum_{j:t_j=0} \int_{(l_j, u_j)_{i \in [n], j \in [m]}} \sqrt{\lambda}(f_j - X) \frac{\partial \prod_{j:t_j=0} f_{L_{i_j}, U_{i_j}|X}(l_j, u_j|X)}{\partial X} d(l_j, u_j)_{j:t_j=0} \\ &= \sum_{\underline{l} \in \mathcal{T}_\tau^n} \frac{1}{\binom{n}{\tau}} \sum_{j:t_j=0} \int_{(l_j, u_j)_{i \in [n], j \in [m]}} \sum_{j:t_j \neq 0} \left( \sqrt{\lambda}(f_j - X) \sqrt{f_{L_{i_j}, U_{i_j}|X}(l_j, u_j|X)} \right) \times \\ & \quad \left( \frac{\partial \log f_{L_{i_j}, U_{i_j}|X}(l_j, u_j|X)}{\partial X} \sqrt{f_{L_{i_j}, U_{i_j}|X}(l_j, u_j|X)} \right) d(l_j, u_j)_{j:t_j=0} \\ & \leq \lambda \mathbb{E}((f_j - X)^2) \sum_{\underline{l} \in \mathcal{T}_\tau^n} \frac{1}{\binom{n}{\tau}} \sum_{j:t_j=0} \sum_{j:t_j \neq 0} \mathbb{E} \left( \left( \frac{\partial \log f_{L_{i_j}, U_{i_j}|X}(l_j, u_j|X)}{\partial X} \right)^2 \right), \end{aligned}$$

where in the last step used the Cauchy-Schwarz inequality similar to the proof of the original Cramer-Rao bound. Combining the resulting terms in the summation completes the proof.  $\square$

#### IV. PRACTICAL LOW-COMPLEXITY FUSION ALGORITHMS

In Section III, we evaluated the accuracy-consensus tradeoff under the general assumptions on the target and measurement statistics. The resulting optimization in Equation (2) requires knowledge of the underlying distribution and has high computational complexity. In this section, we restrict our study to a specific subset of distributed estimation scenarios and provide practical fault-tolerant sensor fusion algorithms. Specifically, in the formulation considered in this section, it is assumed that a subset  $\tau \in [n]$  of the sensors are faulty, and the rest of the sensors are non-faulty. Faulty sensors report independent measurements to each agent, that is, if the  $i$ th sensor is faulty, the pair  $(L_{i,j}, U_{i,j})$  is independent of  $(L_{i',j'}, U_{i',j'})$ ,  $(i, j) \neq (i', j')$  and  $X$ . Otherwise, if the sensor is non-faulty, the sensor reports the same measurement to all agents. That is, there exists  $L_i, U_i$  such that  $L_{i,j} = L_i, j \in [m]$  and  $U_{i,j} = U_i, j \in [m]$ , and  $X$  is in the interval  $[L_i, U_i]$  with probability one. It is assumed that each sensor is equally likely to be faulty, i.e., the  $\tau$  faulty sensors are chosen randomly and uniformly among the  $n$  sensors. To elaborate, we consider a joint distribution  $P_{X, (\tilde{L}_i, \tilde{U}_i)_{i \in [n]}}$  defined on  $\mathbb{R}^{2n+1}$  such that  $P(X \in [\tilde{L}_i, \tilde{U}_i]) = 1, i \in [n]$ . The pair  $(\tilde{L}_i, \tilde{U}_i), i \in [n], j \in [m]$  represent the *ground-truth* measurement at the  $i$ th sensor. The joint measure on  $X, (L_{i,j}, U_{i,j})_{i \in [n], j \in [m]}$  is given as follows:

$$\begin{aligned} & P_{X, (L_{i,j}, U_{i,j})_{i \in [n], j \in [m]}}(\mathcal{A}, (\mathcal{L}_{i,j}, \mathcal{U}_{i,j})_{i \in [n], j \in [m]}) \\ &= \sum_{\underline{l} \in \mathcal{T}_\tau^n} \frac{1}{\binom{n}{\tau}} P_X(\mathcal{A}) \prod_{j:t_j=1, i \in [m]} P_{\tilde{L}_i, \tilde{U}_i}(\mathcal{L}_{i,j}, \mathcal{U}_{i,j}) \prod_{j:t_j=0} P_{\tilde{L}_i, \tilde{U}_i|X} \left( \bigcap_{i \in [n]} \mathcal{L}_{i,1}, \bigcap_{i \in [n]} \mathcal{U}_{i,1} | \mathcal{A} \right), \end{aligned} \quad (6)$$

where  $\mathcal{A}, (\mathcal{L}_{i,j}, \mathcal{U}_{i,j}) \in \mathbb{B}$  and  $\mathcal{T}_\tau^n$  is the set of  $n$ -length binary vectors with Hamming weight equal to  $\tau$ .

A common approach in the estimation literature is to restrict the search to specific classes of estimation algorithms, e.g. linear and limited-degree polynomial estimation algorithms. To this end, Equation (4) can be used to find the optimal fusion algorithm over a given subspace of the  $\mathcal{L}_2(\prod_{i \in [n]} L_{i,j} \times U_{i,j})$ ,  $j \in [m]$  by choosing the orthonormal basis,  $F$ , as the basis for the desired subspace. In the sequel, we consider several classes of previously studied fusion algorithms, introduce a new class of algorithms called the generalized Brooks-Iyengar Algorithms (GBI), and evaluate their performance in a specific scenario to provide insights into this optimization process.

**Definition 4 (Classes of Fusion Algorithms).** *For the distributed estimation setup described above, we define the following class of fusion algorithms:*

- **Linear Fusion Algorithms:** *The class of linear fusion algorithms  $F_{lin}$  is defined as:*

$$(f_j(\cdot))_{j \in [m]} \in F_{lin} \iff \exists \epsilon_{i,j}, \delta_{i,j}, \gamma_j \in \mathbb{R} : f_j((L_{i,j}, U_{i,j})_{i \in [n]}) = \sum_{i=1}^n \epsilon_{i,j} L_{i,j} + \delta_{i,j} U_{i,j} + \gamma_j, \quad j \in [m]. \quad (7)$$

- **Marzullo's Algorithm [19]:** *Let  $L_{i_1,j} \leq L_{i_2,j} \leq \dots \leq L_{i_m,j}$  and  $U_{i_1,j} \leq U_{i_2,j} \leq \dots \leq U_{i_m,j}$ . Then,*

$$f_j((L_{i,j}, U_{i,j})_{i \in [n]}) = \frac{L_{\tau+1,j} + U_{n-\tau-1,j}}{2}, \quad j \in [m]$$

- **Brooks-Iyengar (BI) Algorithm [20]:** *Let  $g_j(x) \triangleq \sum_{i=1}^n \mathbb{1}(x \in [L_{i,j}, U_{i,j}])$ ,  $j \in [m]$  and let the  $x_{j,1} < x_{j,2} < \dots < x_{j,K}$  be all points of transition of  $g_j(x)$ , i.e.,  $\forall k : \lim_{x \rightarrow x_{j,k}^-} g_j(x) \neq \lim_{x \rightarrow x_{j,k}^+} g_j(x)$ . Then,*

$$f_j((L_{i,j}, U_{i,j})_{i \in [n]}) = \frac{\sum_{k \in [K-1]: g_j(\bar{x}_{j,k}) \geq n-\tau} \bar{x}_{j,k} g_j(\bar{x}_{j,k})}{\sum_{k \in [K-1]: g_j(\bar{x}_{j,k}) \geq n-\tau} g_j(\bar{x}_{j,k})}, \quad j \in [m],$$

where  $\bar{x}_{j,k} = \frac{x_{j,k} + x_{j,k+1}}{2}$ ,  $k \in [K-1]$ .

- **Generalized Brooks-Iyengar Algorithms:** *The class of GBI algorithms  $F_{GBI}$  is defined as:*

$$(f_j(\cdot))_{j \in [m]} \in F_{GBI} \iff \exists w_{\underline{t}} \in \mathbb{R} : f_j((L_{i,j}, U_{i,j})_{i \in [n]}) = \frac{\sum_{\underline{t} \in \mathcal{T}_{\tau}^n} w_{\underline{t}} m_{\underline{t}}}{\sum_{\underline{t} \in \mathcal{B}(n,\tau)} w_{\underline{t}}}, \quad j \in [m],$$

where  $m_{\underline{t}} = \frac{\min_{j: t_j=0} u_j + \max_{j: t_j=0} \ell_j}{2}$  and  $\mathcal{T}_{\tau}^n = \{\underline{t} \in \{0, 1\}^n \mid \sum_{i=1}^n t_i = \tau\}$ .

**Remark 4.** *In the distributed estimation setup described by Equation (6) any  $\lambda$ -optimal linear fusion algorithm must have  $\epsilon_{i,j} = \epsilon_{i,j'}$  and  $\delta_{i,j} = \delta_{i,j'}$ ,  $i \in [n]$ ,  $j, j' \in [m]$ . The reason is that the objective function in (4) is convex and it is symmetric with respect to the variables  $\epsilon_{i,j}$ ,  $\epsilon_{i,j'}$  and  $\delta_{i,j}$ ,  $\delta_{i,j'}$  due to the probability distribution give in (6).*

**Remark 5.** *Finding the optimal GBI fusion algorithm requires solving the following:*

$$\bar{f}_{GBI}^* = \arg \max_{w_{\underline{t}}: \sum_{\underline{t}} w_{\underline{t}}^2 = 1} \Theta(AA^t)^{-1} \Theta^t,$$

where  $\underline{f}_j(\cdot) = \sum_{\underline{t}} w_{\underline{t}} \frac{m_{\underline{t}}}{\text{Var}(m_{\underline{t}})}$ ,  $j \in [m]$ .

The following proposition characterizes the  $\lambda$ -optimal linear fusion algorithm for  $m = 2$  and  $\mathbb{E}(X) = 0$ . The characterization is used in the numerical simulations in the subsequent section.

**Proposition 4.** *Consider the distributed estimation setup described by Equation (6). Let  $m = 2$ ,  $\mathbb{E}(X) = 0$ , and  $\lambda \in (0, 1)$ . The parameters  $(\epsilon_{i,j}, \delta_{i,j}, \gamma_j), i \in [n], j \in [m]$  characterizing the  $\lambda$ -optimal linear fusion satisfy:*

- 1)  $\exists(\epsilon_j, \delta_j) : \epsilon_j = \epsilon_{i,j}, \quad \delta_j = \delta_{i,j}, \quad i \in [n], j \in \{1, 2\}$ ,
- 2)  $\gamma_j = -n(\epsilon_j \mathbb{E}(L_1) + \delta_j \mathbb{E}(U_1)), \quad j \in \{1, 2\}$ ,
- 3)  $\delta_j$  is a root of  $\xi_{1,j}x^2 + \xi_{2,j}x + \xi_{3,j}$ , where

$$\begin{aligned} \xi_{1,j} &\triangleq n\text{Var}(U_1) + n(n-1)\text{Cov}(U_1, U_2) \\ \xi_{2,j} &\triangleq 2\epsilon_j(n\text{Cov}(L_1, U_1) + n(n-1)\text{Cov}(L_1, U_2)) \\ \xi_{3,j} &\triangleq n\text{Var}(L_1) + n(n-1)\text{Cov}(L_1, L_2) \end{aligned}$$

- 4)  $(\epsilon_1, \epsilon_2)$  is given as:

$$(\epsilon_1, \epsilon_2) = \arg \min_{\epsilon_1, \epsilon_2 \in \mathbb{R}^2} \frac{\theta_1^2 + \theta_2^2}{1 - z^2} + \frac{2z(\theta_1 + \theta_2)^2}{(1 - z^2)^2},$$

where  $\theta_j \triangleq n\epsilon_j \text{Cov}(L_1, X) + n\delta_j \text{Cov}(U_1, X)$  and

$$\begin{aligned} z &\triangleq -(1 - \lambda) \times \left( \epsilon_1 \epsilon_2 (\text{Var}(L_1) + n(n-1)\text{Cov}(L_1, L_2)) + \delta_1 \delta_2 (\text{Var}(U_1) + n(n-1)\text{Cov}(U_1, U_2)) + \right. \\ &\quad \left. (\epsilon_1 \delta_2 + \epsilon_2 \delta_1) (n\text{Cov}(L_1, U_1) + n(n-1)\text{Cov}(L_1, U_2)) \right). \end{aligned}$$

The proof follow by optimizing Equation (4) on the set of linear fusion algorithms. We provide a summary of the proof arguments in the following: 1) follows by Remark 4, 2) follows from the fact that  $\mathbb{E}(\bar{f}_j) = 0$  and  $\mathbf{b} = \mathbb{E}(X)\mathbf{e}_m = 0$ , 3) follows from the fact that  $\mathbb{E}(\bar{f}_j^2) = 1$ , and 4) follows by setting  $A = \begin{bmatrix} 1 & -z \\ -z & 1 \end{bmatrix}$  and simplifying the optimization in Equation (4).

## V. NUMERICAL EXAMPLE: UNIFORMLY DISTRIBUTED VARIABLES

In order to numerically study the accuracy-consensus tradeoff characterized in the prequel, in this section we consider a specific distributed estimation example and perform numerical simulations of various fusion algorithms. In particular, we consider the distributed estimation setup described by Equation (6) and assume that  $X$  is uniformly distributed over the interval  $[-x_{max}, x_{max}]$ , where  $x_{max} \in \mathbb{N}$ . Let the *precision* of the  $j$ th sensor be parametrized by the random variable  $\delta_j$  which is uniformly distributed over the set  $\{1, 2, \dots, x_{max}\}$ . Let the set of possible outputs for the  $j$ th sensor be  $\mathcal{P}_j = \{[-x_{max} + 2\frac{d-1}{\delta_j}x_{max}, -x_{max} + 2\frac{d}{\delta_j}x_{max}], d \in [\delta_j]\}$ . Note that by this construction,  $\tilde{L}_i, \tilde{U}_i, i \in [n]$  are discrete variables taking value from

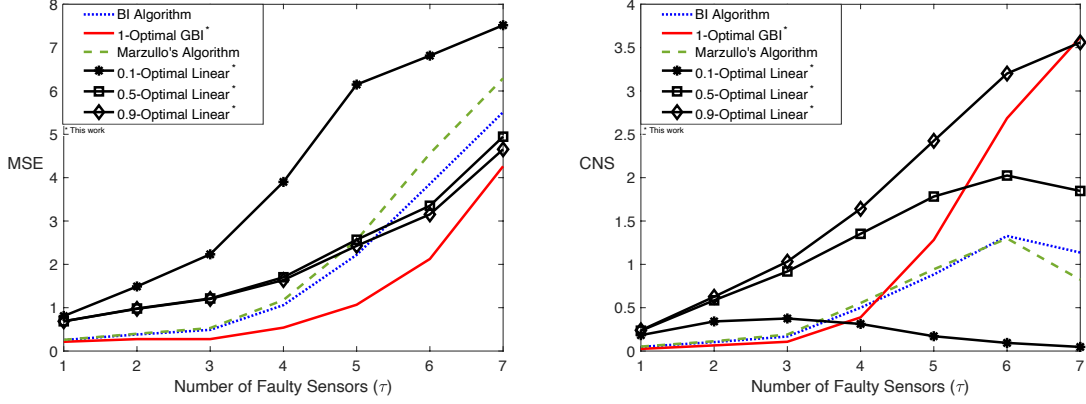


Fig. 2: Comparison of sensor fusion algorithms for  $n = 10$  sensors,  $m = 2$  agents,  $\tau \in [7]$  faulty sensors, and  $X \in [-5, 5]$ .

$\mathcal{L} = \{-x_{max} + 2\frac{d-1}{\delta_j}x, d \in [\delta_j]\}$  and  $\mathcal{U} = \{-x_{max} + 2\frac{d}{\delta_j}x_{max}, d \in [\delta_j]\}$ , respectively. Given  $X \in [-x_{max}, x_{max}]$ , the variables  $\tilde{L}_i, \tilde{U}_i, i \in [n]$  take the unique values in  $\mathcal{L}$  and  $\mathcal{U}$ , respectively, for which  $X \in [\tilde{L}_i, \tilde{U}_i]$ .

The following proposition shows that the 1-optimal fusion algorithm for this setup is a GBI algorithm.

**Proposition 5.** *For the distributed estimation setup described above, the 1-optimal fusion algorithm is equal to the GBI algorithm with  $w_{\underline{t}} \triangleq |\min u_j - \max \ell_j|^+ \prod_{j:i_j=0} \frac{1}{u_j - \ell_j}$ ,  $\underline{t} \in \mathcal{T}_{\tau}^n$ .*

*Proof.* The 1-optimal fusion algorithm is given by  $\mathbb{E}(X|L^n, U^n)$ . We focus on  $j = 1$  and drop the subscript  $j$  when there is no ambiguity. We have:

$$\begin{aligned}
\mathbb{E}(X|L^n = \ell^n, U^n = u^n) &= \int_x x f_{X|L^n, U^n}(x|\ell^n, u^n) dx \\
&= \int_x x \prod_{j=1}^n f_{L_j, U_j}(\ell_j, u_j) \frac{1}{\binom{n}{\tau}} \sum_{\underline{t} \in \mathcal{B}(n, \tau)} \frac{\prod_{j:i_j=0} f_{X|L_j, U_j, i_j}(x|\ell_j, u_j, 0)}{f_X^{n-\tau-1}(x)} dx \\
&= \int_x x \frac{\prod_{j=1}^n f_{L_j, U_j}(\ell_j, u_j)}{f_{L^n, U^n}(\ell^n, u^n)} \frac{1}{\binom{n}{\tau}} \sum_{\underline{t} \in \mathcal{B}(n, \tau)} \frac{\prod_{j:i_j=0} f_{X|L_j, U_j, i_j}(x|\ell_j, u_j, 0)}{f_X^{n-\tau-1}(x)} dx \\
&= C \sum_{\underline{t} \in \mathcal{B}(n, \tau)} \int_x x \prod_{j:i_j=0} \frac{\mathbb{1}(x \in [\ell_j, u_j])}{u_j - \ell_j} dx,
\end{aligned}$$

where  $C \triangleq \ell^{n-\tau-1} \frac{\prod_{j=1}^n f_{L_j, U_j}(\ell_j, u_j)}{f_{L^n, U^n}(\ell^n, u^n)} \frac{1}{\binom{n}{\tau}}$ . Note that:

$$\begin{aligned}
f_{X, L^n, U^n}(x, \ell^n, u^n) &= \sum_{\underline{t} \in \mathcal{B}(n, \tau)} \frac{1}{\binom{n}{\tau}} f_{X, L^n, U^n | \underline{t}}(x, \ell^n, u^n | \underline{t}) = \sum_{\underline{t} \in \mathcal{B}(n, \tau)} \frac{1}{\binom{n}{\tau}} f_X(x) f_{L^n, U^n | X, \underline{t}}(\ell^n, u^n | x, \underline{t}) \\
&\stackrel{(a)}{=} \frac{1}{\binom{n}{\tau}} f_X(x) \sum_{\underline{t} \in \mathcal{B}(n, \tau)} \prod_{j:i_j=1} P_{L_j, U_j}(\ell_j, u_j) \prod_{j:i_j=0} P_{L_j, U_j | X, i_j}(\ell_j, u_j | x, 0)
\end{aligned}$$

$$\stackrel{(b)}{=} \frac{1}{\binom{n}{\tau}} f_X(x) \sum_{\underline{t} \in \mathcal{B}(n, \tau)} \prod_{j: i_j=1} f_{L_j, U_j}(\ell_j, u_j) \times$$

$$\prod_{j: i_j=0} \frac{f_{X|L_j, U_j, i_j}(x|\ell_j, u_j, 0) f_{L_j, U_j}(\ell_j, u_j)}{f_X(x)} = \prod_{j=1}^n f_{L_j, U_j}(\ell_j, u_j) \frac{1}{\binom{n}{\tau}} \sum_{\underline{t} \in \mathcal{B}(n, \tau)} \frac{\prod_{j: i_j=0} f_{X|L_j, U_j, i_j}(x|\ell_j, u_j, 0)}{f_X^{n-\tau-1}(x)},$$

where in (a) we have used the fact that the output of faulty sensors is independent of  $X$ , and (b) follows from the Bayes rule. We have:

$$\frac{f_{L^n, U^n}(\ell^n, u^n)}{\prod_{j=1}^n f_{L_j, U_j}(\ell_j, u_j)} = \frac{\ell^{n-\tau-1}}{\binom{n}{\tau}} \sum_{\underline{t} \in \mathcal{B}(n, \tau)} \int_x \prod_{j: i_j=0} \frac{\mathbb{1}(x \in [\ell_j, u_j])}{u_j - \ell_j} = \frac{\ell^{n-\tau-1}}{\binom{n}{\tau}} \sum_{\underline{t} \in \mathcal{B}(n, \tau)} \frac{\min_{j: i_j=0} u_j - \max_{j: i_j=0} \ell_j}{\prod_{j: i_j=0} (u_j - \ell_j)}$$

So,

$$C = \left( \sum_{\underline{t} \in \mathcal{B}(n, \tau)} \frac{|\min_{j: i_j=0} u_j - \max_{j: i_j=0} \ell_j|^+}{\prod_{j: i_j=0} (u_j - \ell_j)} \right)^{-1}. \quad (8)$$

Furthermore,:

$$\mathbb{E}(X|L^n = \ell^n, U^n = u^n) = C \sum_{\underline{t} \in \mathcal{B}(n, \tau)} \int_{x \in \cap_{j: i_j=0} [\ell_j, u_j]} x \prod_{j: i_j=0} \frac{1}{u_j - \ell_j} dx.$$

$$= C \sum_{\underline{t} \in \mathcal{B}(n, \tau)} \frac{|\min u_j - \max \ell_j|^+ (\min u_j + \max \ell_j)}{2} \prod_{j: i_j=0} \frac{1}{u_j - \ell_j}. \quad (9)$$

Combining (8) and (9), we have:

$$\mathbb{E}(X|L^n = \ell^n, U^n = u^n) = \frac{\sum_{\underline{t} \in \mathcal{B}(n, \tau)} w_{\underline{t}} m_{\underline{t}}}{\sum_{\underline{t} \in \mathcal{B}(n, \tau)} w_{\underline{t}}},$$

□

In order to compare the performance of the sensor fusion algorithms introduced in Section IV, we numerically simulate their performance in a scenario with  $n = 10$  sensors,  $m = 2$  agents,  $1 \leq \tau \leq 7$  faulty sensors, and  $x_{max} = 5$ . We consider the  $\lambda$ -optimal linear fusion algorithm given in Proposition 4 for  $\lambda \in \{0.1, 0.5, 0.9\}$ , the original BI algorithm [20], Marzullo's algorithm [19], and the 1-optimal GBI algorithm introduced in Proposition 5. Figure 2 shows the resulting mean square error (MSE) and consensus costs (CNS). It can be noted that the 0.1-optimal linear fusion algorithm has the worst MSE and the best CNS among the simulated algorithms. This is expected, as the fusion algorithm prioritizes consensus over accuracy. On the other hand, the 0.9-optimal linear fusion algorithm has the best MSE and worst CNS among the three linear fusion algorithms since it prioritizes accuracy over consensus. Furthermore, the BI and Marzullo's algorithms perform well for  $\tau \leq \frac{n}{3}$ . This is in agreement with prior works (e.g. [21]) which provide worst-case performance guarantees for BI and Marzullo's algorithms when  $\tau \leq \frac{n}{3}$ . The simulation shows that in this scenario, the average-case performance is good as well. The 1-optimal GBI has the best MSE performance as it is the optimal sensor fusion algorithm in terms

of MSE as shown in Proposition 5. It also outperforms the BI and Marzullo's algorithms in terms of CNS for  $\tau \leq \frac{n}{3}$ . It is of note that the highly non-linear BI, Marzullo, and GBI algorithms outperform the best linear estimators in terms of MSE in this scenario.

## VI. CONCLUSION

Distributed estimation in the context of sensor networks was considered, where a subset of sensor measurements are faulty. Faulty sensors model both sensor malfunctions, as well as adversarial interference in measurement and transmission phases. It was shown that there is an inherent tradeoff between satisfying the accuracy and consensus objectives. A computable characterization of the fusion algorithm optimizing this tradeoff was provided. Several classes of fusion algorithms were studied, and the theoretical derivations were verified through various numerical simulations of their performance in terms of accuracy and consensus objectives.

**Acknowledgements:** The authors would like to thank Prof. Azad Madni and Prof. S. Sandeep Pradhan for stimulating discussions.

## REFERENCES

- [1] Ian F Akyildiz and Mehmet Can Vuran. *Wireless sensor networks*. John Wiley & Sons, 2010.
- [2] Wei Zhong and Javier Garcia-Frias. Combining data fusion with joint source-channel coding of correlated sensors. In *Information Theory Workshop*, pages 315–317. IEEE, 2004.
- [3] Shaoming He, Hyo-Sang Shin, Shuoyuan Xu, and Antonios Tsourdos. Distributed estimation over a low-cost sensor network: A review of state-of-the-art. *Information Fusion*, 54:21–43, 2020.
- [4] John A Gubner. Distributed estimation and quantization. *IEEE Transactions on Information Theory*, 39(4):1456–1459, 1993.
- [5] Nisar Ahmed, Jorge Cortes, and Sonia Martinez. Distributed control and estimation of robotic vehicle networks: Overview of the special issue. *IEEE Control Systems Magazine*, 36(2):36–40, 2016.
- [6] Junkun Yan, Wenqiang Pu, Shenghua Zhou, Hongwei Liu, and Maria S Greco. Optimal resource allocation for asynchronous multiple targets tracking in heterogeneous radar networks. *IEEE transactions on signal processing*, 68:4055–4068, 2020.
- [7] Fabio Pasqualetti, Ruggero Carli, and Francesco Bullo. Distributed estimation via iterative projections with application to power network monitoring. *Automatica*, 48(5):747–758, 2012.
- [8] Aleksandr Kim, Aljoša Ošep, and Laura Leal-Taixé. Eagermot: 3d multi-object tracking via sensor fusion. In *2021 IEEE International Conference on Robotics and Automation (ICRA)*, pages 11315–11321. IEEE, 2021.
- [9] Radoslav Ivanov, Miroslav Pajic, and Insup Lee. Attack-resilient sensor fusion for safety-critical cyber-physical systems. *ACM Transactions on Embedded Computing Systems (TECS)*, 15(1):1–24, 2016.
- [10] Hocheol Shin, Dohyun Kim, Yujin Kwon, and Yongdae Kim. Illusion and dazzle: Adversarial optical channel exploits against lidars for automotive applications. In *International Conference on Cryptographic Hardware and Embedded Systems*, pages 445–467. Springer, 2017.
- [11] Leslie Lamport, Robert Shostak, and Marshall Pease. The byzantine generals problem. *ACM Transactions on Programming Languages and Systems*, 4(3):382–401, 1982.

- [12] R Indrakumari, T Poongodi, Kavita Saini, and B Balamurugan. Consensus algorithms—a survey. In *Blockchain Technology and Applications*, pages 65–78. Auerbach Publications, 2020.
- [13] Neha Sangwan, Varun Narayanan, and Vinod M Prabhakaran. Byzantine consensus over broadcast channels. In *2022 IEEE International Symposium on Information Theory (ISIT)*, pages 1157–1162. IEEE, 2022.
- [14] Xiaofan He, Huaiyu Dai, and Peng Ning. A byzantine attack defender: The conditional frequency check. In *2012 IEEE International Symposium on Information Theory Proceedings*, pages 975–979. IEEE, 2012.
- [15] Reza Olfati-Saber and Richard M Murray. Consensus problems in networks of agents with switching topology and time-delays. *IEEE Transactions on automatic control*, 49(9):1520–1533, 2004.
- [16] Ruggero Carli, Alessandro Chiuso, Luca Schenato, and Sandro Zampieri. Distributed kalman filtering based on consensus strategies. *IEEE Journal on Selected Areas in communications*, 26(4):622, 2008.
- [17] Stephen R Mahaney and Fred B Schneider. Inexact agreement: Accuracy, precision, and graceful degradation. In *Proceedings of the fourth annual ACM symposium on Principles of distributed computing*, pages 237–249, 1985.
- [18] Danny Dolev, Nancy A Lynch, Shlomit S Pinter, Eugene W Stark, and William E Weihl. Reaching approximate agreement in the presence of faults. *Journal of the ACM (JACM)*, 33(3):499–516, 1986.
- [19] Keith Marzullo. Tolerating failures of continuous-valued sensors. *ACM Transactions on Computer Systems (TOCS)*, 8(4):284–304, 1990.
- [20] Richard R Brooks and S Sitharama Iyengar. Robust distributed computing and sensing algorithm. *Computer*, 29(6):53–60, 1996.
- [21] Buke Ao, Yongcai Wang, Lu Yu, Richard R Brooks, and SS Iyengar. On precision bound of distributed fault-tolerant sensor fusion algorithms. *ACM Computing Surveys (CSUR)*, 49(1):1–23, 2016.
- [22] Pramod K Varshney. Multisensor data fusion. *Electronics & Communication Engineering Journal*, 9(6):245–253, 1997.
- [23] Robin R Murphy. Dempster-shafer theory for sensor fusion in autonomous mobile robots. *IEEE Transactions on robotics and automation*, 14(2):197–206, 1998.
- [24] Alfred Gray, Elsa Abbena, and Simon Salamon. *Modern differential geometry of curves and surfaces with Mathematica®*. Chapman and Hall/CRC, 2017.
- [25] Rick Durrett. *Probability: theory and examples*, volume 49. Cambridge university press, 2019.
- [26] Harry L Van Trees. *Detection, estimation, and modulation theory, part I: detection, estimation, and linear modulation theory*. John Wiley & Sons, 2004.