

A technical note for the 91-clauses SAT resolution with Indirect QAOA based approach

G. Fleury and P. Lacomme

Université Clermont-Auvergne, Clermont-Auvergne-INP, LIMOS (UMR CNRS 6158),

1 rue de la Chebarde,

63178 Aubière Cedex, France

gerard.fleury@isima.fr, philippe.lacomme@isima.fr

Abstract. This paper addresses the resolution of the 3-SAT problem using a QAOA-like approach. The chosen principle involves modeling the solution ranks of the 3-SAT problem, which, in this particular case, directly represent a solution. This results in a highly compact circuit with few gates, enabling the modeling of large-sized 3-SAT problems. Numerical experimentation demonstrates that the approach can solve instances composed of 91 clauses and 20 variables with an implementation based on Qiskit.

1. Introduction

The paper assumes the definitions and notations standard in propositional satisfiability (SAT) and maximum satisfiability (MaxSAT) as established by (Biere et al., 2009). Maximum satisfiability (MaxSAT) represents an optimization variant of SAT, wherein the goal is to find an optimal truth assignment instead of merely a satisfying one. Within MaxSAT, the optimization objective is determined by a collection of weighted soft clauses. The objective value of a truth assignment is the total sum of the weights associated with the soft clauses it satisfies. Moreover, the MaxSAT problem may encompass hard clauses that necessitate satisfaction from the truth assignment. Many optimization problems can naturally be formulated as instances of MaxSAT.

The 3-SAT problem involves determining whether a given 3-CNF (Conjunctive Normal Form) has a satisfying assignment. An outstanding and celebrated open question pertains to whether solving k -SAT for $k \geq 3$ necessitates exponential time.

While all NP-complete problems share equivalence in terms of the existence of polynomial-time algorithms, there exists considerable diversity in the worst-case complexity of known algorithms for resolving 3-SAT. Examining algorithms designed for 3-SAT resolution necessitates an exploration of the range in worst-case complexity. The SAT problem has been established as NP-complete (Cook, 1971), implying that algorithms for solving SAT instances may require exponential time in the worst case. Consequently, various techniques have been proposed to enhance the efficiency of SAT solvers, categorizing them into two main groups: Conflict Driven Clause Learning solvers (CDCL) (Marques-Silva and Sakallah, 1999) and Stochastic Local Search solvers (SLS). CDCL approaches are backtracking approaches taking advantages to heuristic/optimization pruning methods. SAT problems often exhibit symmetries that can be pre-computed to improve the original SAT problem with symmetry breaking clauses.

A large number of classical algorithms have been introduced to efficiently solve instances of the SAT problem and a large number of these algorithms are heuristics which efficiency strongly depend on the

density $\alpha = n / k$ of the SAT formulas where k is the number of variables in clause. For density $\alpha \geq 2^m \log 2$, this problem is unsatisfiable with high probability (Franco and Paull, 1983) and conversely, for a density of $\alpha < 2^m \log 2$, the SAT problem is satisfiable with a high probability (Ming-Te and Franco, 1990; Chvátal and Reed, 1992).

Within the realm of computational complexity theory, the Maximum Satisfiability Problem (MAX-SAT) involves determining the maximum number of clauses within a given Boolean formula in conjunctive normal form that can be satisfied simultaneously by assigning truth values to the variables. This problem extends beyond the scope of the Boolean satisfiability problem, which solely focuses on verifying the existence of a truth assignment satisfying all the clauses.

Let:

n : the number of variables

m : the number of clauses that have to be satisfied

C : the set of clauses

S_i^p : the set of variables that have to be true in the clause i

S_i^n : the set of variables that have to be false in the clause i

w_i : the weight of clause i

Variables

y_j : a binary variables that values 1 if the variables number j value true

z_i : a binary variables that values 1 if the clause number i value true

The objective consists in maximizing the weight of the satisfied clauses

$$\max \sum_{i=1}^n w_i \cdot z_i$$

Subject to:

$$\forall i = 1, n \quad z_i \leq \sum_{j \in S_i^p} y_j + \sum_{j \in S_i^n} (1 - y_j) \quad (1)$$

A k -SAT problem can solve as a special case of the Max- k -SAT considering $w_i = 1$.

Quantum computing generalizes classical computing from binary bits to quantum bits, which may represent both 0's and 1's simultaneously in a superposition. SAT received attention of the Quantum community during the last years taking advantages of Grover Algorithm in (Paulet et al., 2023), (Lin et al., 2023) and (Varmantchaonala et al., 2023). The resolution is limited to small scale instances with, for example, 4 variables and 4 clauses in (Lin et al., 2023). (Yu et al., 2023) introduces an adaptive-bias QAOA (ab-QAOA) that solved the hard-region 3-SAT and Max-3-SAT problems effectively considering instances with 10 variables.

2. QAOA approach for SAT

The exploration of quantum approaches to optimization problems involves both modeling and implementation aspects in research. Among various domains, scheduling problems are particularly attractive for the application of quantum technology, given their inherently combinatorial nature. In a recent work by (Bourreau et al., 2023), a novel perspective on resolution was introduced. Instead of treating the problem as a Hamiltonian for function minimization, the focus shifted to the rank of solutions. The aim was to develop concise circuits with minimal gates suitable for current classical machines when addressing instances from literature. To achieve this, we adopt the concept of rank as defined by Laisant (1888), resulting in an approach termed IQAOA (Indirect QAOA) that extends the Quantum Approximate Optimization Algorithm (QAOA).

The indirect depiction of a solution leverages the inherent one-to-one correlation between permutations and a concept termed subexceedant functions. This approach significantly streamlines the representation of permutation ranks by employing a single integer. Numerous methods are available to establish this one-to-one correspondence, with the Lehmer code, commonly known as the inversion table, standing out as the most notable. The algorithmic description of this approach was initially introduced by Knuth in 1981 (Knuth, 1981).

In contrast to QAOA (Hadfield, 2018), which necessitates a Hamiltonian to define the function for minimization and may require a substantial number of gates, IQAOA simplifies the process by requiring only a Hamiltonian that models the ranks. This results in a highly compact circuit with a minimal number of gates and qubits. The IQAOA algorithm utilizes parametrized $\vec{\beta}$ and $\vec{\gamma}$ weights to define a quantum state $|\varphi(\vec{\beta}, \vec{\gamma})\rangle$ representing a solution rank x . The probability of obtaining rank x , is given by $|\langle x | \varphi(\vec{\beta}, \vec{\gamma}) \rangle|^2$ and the expectation value is evaluated by sampling $\langle \varphi(\vec{\beta}, \vec{\gamma}) | C^p | \varphi(\vec{\beta}, \vec{\gamma}) \rangle$. Each generation provides a ranking within the solution list, and this rank can be translated into the corresponding solution. With fixed values for $\vec{\beta}, \vec{\gamma}$, the quantum computer defines the state $|\varphi(\vec{\beta}, \vec{\gamma})\rangle$, and a measurement in the computational basis produces a string x for evaluating $\langle \varphi(\vec{\beta}, \vec{\gamma}) | C^p | \varphi(\vec{\beta}, \vec{\gamma}) \rangle$. The distinct advantage lies in the simultaneous manipulation of all ranks, effectively covering all potential solutions through the associated probability distribution. In contrast to conventional methods for solving problems, which often involve exploring a subset of the solution space, quantum approaches overcome the challenge by addressing the entire solution space. The complexity shifts towards modeling it as a Hamiltonian and determining the angles associated with the probability distribution (Bourreau et al., 2023).

The binary representation of rank is

$$\text{rank} = \sum_{j=0}^n x_j \cdot 2^j \text{ with } x_j \in \{0; 1\} \quad (5)$$

with

$$H_p = \frac{1}{2} \sum_{j=0}^n (Id - Z_j) \cdot 2^j \quad (6)$$

The algorithm principle is illustrated on Fig. 1. IQAOA efficiency relies on the following key-points:

- The capability to attain a favorable ratio in the estimation of $C^p(\vec{\beta}, \vec{\gamma})$ achieved through a meticulously calibrated number of necessary shots..

- The optimal distribution $|\psi(\vec{\beta}^*, \vec{\gamma}^*)\rangle$ once discovered, should be estimated from a restricted subset of solutions, taking into account the overall number of solutions. This approach helps circumvent the need for costly enumerations. Essentially, the algorithm needs to converge toward optimal and near-optimal solutions, reflecting that a substantial portion of probabilities is associated with these optimal or high-quality solutions.
- The presence of a specialized method for computing $(\vec{\beta}^*, \vec{\gamma}^*)$.
- The value of qubits, denoted as p , should satisfy $\geq n!$ and while keeping the quantum circuit's gate count low for encoding a permutation. This consideration is in relation to the classical QAOA approach and the corresponding circuit length

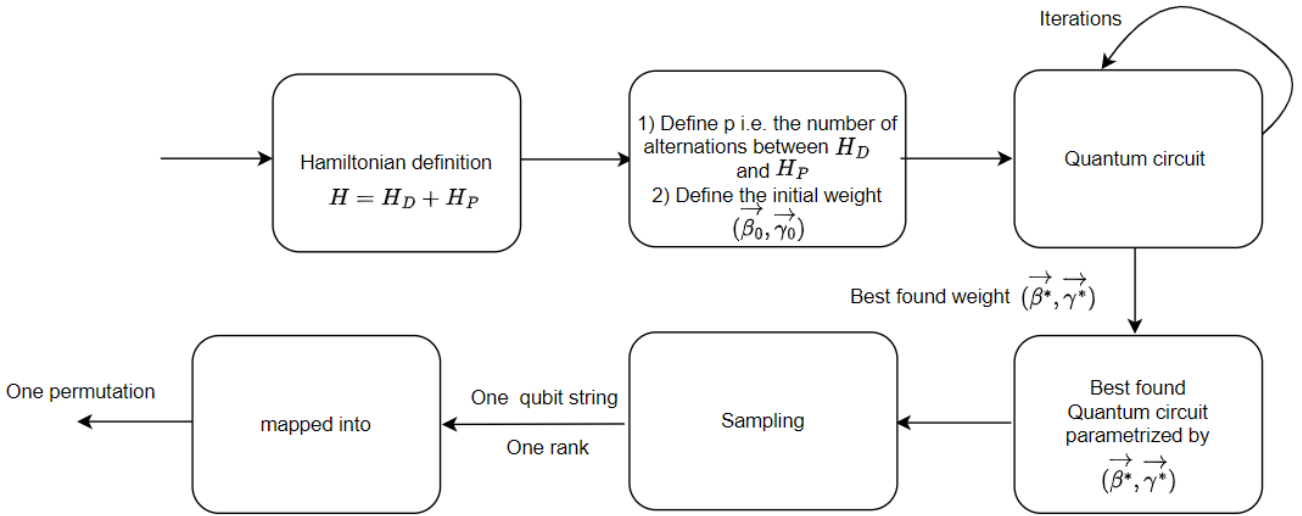


Figure 1. IQAOA principles (Bourreau et al., 2023)

The best parameters $(\vec{\beta}^*, \vec{\gamma}^*)$ can be computed any iterative based method including but limited to genetic algorithm, GRASP, simulated annealing.

In the very specific situation of the SAT, the binary string $(x_1, \dots, x_j, \dots, x_n)$ is the direct representation of one solution SAT solution and the binary string is fully defined by the measurement. By consequence a distribution $|\psi(\vec{\beta}, \vec{\gamma})\rangle$ is a set of binary strings and each string is related to the number of shots experienced during the sampling.

The objective function, i.e. the cost associated to each binary string $(x_1, \dots, x_j, \dots, x_n)$ must be carefully defined to

- modelize the number of unsatisfied clauses;
- favor a probability distribution that converge during the generations on high-quality solutions, specifically solutions with no clauses violation.

Attaining the desired probability distribution involves choosing suitable minimization criteria. To construct a distribution that highlights probabilities associated with low-cost solutions, while avoiding an large number of values with residual probabilities, a possible approach is to incorporate a combination of both the mean and a criterion linked to the trend distribution, such as deciles or quartiles. This approach helps concentrate probabilities on cost-effective solutions while reducing residual probabilities across different values.

To favor the metaheuristic convergence, the appropriate criteria is defined as a weighted function:

$$g: [x] \rightarrow \mathbb{R}$$

$$g(x) = \varsigma \cdot h(x) + \vartheta \cdot d(x)$$

Where

ς and ϑ : are two real number modeling the relative performance of $h(x)$ and $d(x)$ such that $\min \varsigma \cdot h(x) > \max \vartheta \cdot d(x)$ defining a strict hierarchy between the criteria

$h(x)$: the number of unsatisfied clauses in x

$d(x)$: the measure of divergence in the position of potentially non-satisfied clauses in x

$$d(x) = \sum_{i=1}^n (1 - z_i) \cdot i^2$$

Let us note cf_i the cumulated frequencies and e_i the element related to cf_i and let us define e_p for $p \in]0; 1[$:

$$e_p = j \text{ where } cf_j \geq p \text{ and } cf_{j-1} < p$$

For a $p \in]0; 1[$, e_p is the value that divide a population in such a way that $p \times 100$ percent of the population is above e_p . Let us define $E = \{e_{p_1}; e_{p_2}; e_{p_3}; \dots; e_{p_k}\}$ a set of k distinct probabilities, for example, $E = \{e_{0.01}; e_{0.06}; e_{0.11}; e_{0.17}; e_{0.22}; e_{0.27}; e_{0.32}\}$ defines 7 values dividing the population with 1 percent above for $E_1 = e_{0.01}$, with 6 percents above for $E_2 = e_{0.06}$ and with 32 percents above for $E_7 = e_{0.32}$

Let us note $\bar{g}_s$ the estimator of the average $\langle \varphi(\vec{\beta}, \vec{\gamma}) | g(x) | \varphi(\vec{\beta}, \vec{\gamma}) \rangle$ using s shots and $\bar{d}_s$ the estimator of the sum of $g(x)$ for $x \in E$:

$$C^p(\vec{\beta}, \vec{\gamma}) = \langle \varphi(\vec{\beta}, \vec{\gamma}) | g(x) | \varphi(\vec{\beta}, \vec{\gamma}) \rangle + \sum_{x \in E} \langle \varphi(\vec{\beta}, \vec{\gamma}) | g(x) | \varphi(\vec{\beta}, \vec{\gamma}) \rangle$$

This function derives a probability distribution that prioritizes high-quality solutions, specifically targeting solutions with minimal unsatisfied clauses.

3. Numerical experiments

The experiments were carried out using the 91-clauses-20-variables instances in the DIMACS cnf format which supported by a large number of solvers available in the SATLIB solvers collection.

<https://www.cs.ubc.ca/~hoos/SATLIB/benchm.html>

The 1000 instances of the dataset are all satisfiable. Note that numerical experiments focus on this set of instances because the quantum simulator we use is limited to 32 qubits i.e. only 3-SAT with less than 32 variables can be solved using the simulator.

All the experiments have been carried out with:

- $p = 2$ i.e. a QAOA depth limited to 2
- A genetic algorithm implemented using the **pygad** python library.
- Each quantum state is evaluated using 250 shots

The genetic algorithm has been tuned considering:

- 150 generations;
- 30 solutions per population;
- A probability of 25% for mutation;
- A tournament parent selection
- 4 solutions are kept for elitism.

Be aware that the parameters were established following a brief numerical study and warrant special attention. All experiments were conducted utilizing Qiskit (IBM) and the simulator.

The preliminary experiments were carry out on a small-scale instance with 10 clauses and 5 variables.

$C_1 = x_1 \vee x_2 \vee x_3$	This instance has 4 solutions only fully described below:
$C_2 = x_1 \vee x_2 \vee \bar{x}_3$	Solution 1 = [1, 1, 1, 0, 0]
$C_3 = x_1 \vee \bar{x}_2 \vee x_3$	Solution 2 = [1, 1, 1, 0, 1]
$C_4 = x_1 \vee \bar{x}_2 \vee \bar{x}_3$	Solution 3 = [1, 1, 1, 1, 0]
$C_5 = \bar{x}_1 \vee x_2 \vee x_3$	Solution 4 = [1, 1, 1, 1, 1]
$C_6 = \bar{x}_1 \vee x_2 \vee \bar{x}_3$	<i>i.e.</i>
$C_7 = \bar{x}_1 \vee \bar{x}_2 \vee x_3$	solution 1. $x_1 = \text{True}, x_2 = \text{True}, x_3 = \text{True}$
$C_8 = x_1 \vee x_5 \vee x_4$	solution 1. $x_1 = \text{True}, x_2 = \text{True}, x_3 = \text{True}, x_5 = \text{True}$
$C_8 = x_1 \vee x_5 \vee \bar{x}_4$	solution 1. $x_1 = \text{True}, x_2 = \text{True}, x_3 = \text{True}, x_4 = \text{True}$
$C_{10} = x_1 \vee \bar{x}_5 \vee x_4$	solution 1. $x_1 = \text{True}, x_2 = \text{True}, x_3 = \text{True}, x_4 = \text{True}, x_5 = \text{True}$

The total number of permutations is 32 and there is only 3 different values of $h(x)$: there is only 4 permutation leading to a feasible solution, 16 permutations where one constraint is not satisfied and the larger number of unsatisfied constrained in 2 (table 1).

Table 1. Initial distribution of solution considering $h(x)$ v.s. final distribution

Initial distribution 32 solutions			Final distribution 100 000 samplings	
$h(x)$	Number of solutions	Probability	Number of solutions	Probability
0	4	12.500	89173	89.173
1	16	50.000	10725	10.725
2	12	37.500	102	0.102
3	0	0.000	0	0.000

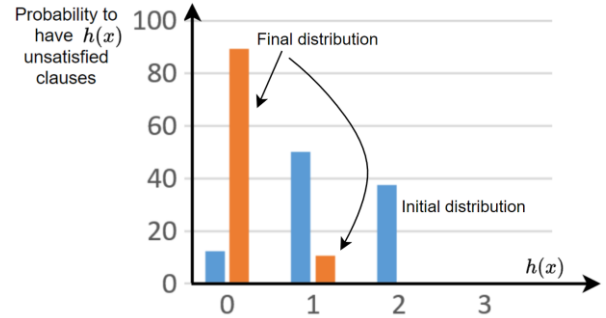


Figure 2. Visualization of the two distribution for the 10-clause and 5-variable instance

After optimization, the probability to obtain a solution satisfying all the clauses is about 89% proving the efficiency of the approach in this widget example (Fig. 2).

The first instance referred to as **uf20-01.cnf** is composed of 20 variables and 91 clauses and 8 solutions satisfy the 91 clauses:

Solution 1 = [0, 1, 1, 1, 0, 0, 0, 1, 1, 1, 1, 0, 0, 1, 1, 0, 1, 1, 1, 1]
 Solution 2 = [1, 0, 0, 0, 0, 1, 0, 0, 0, 0, 0, 0, 1, 1, 1, 0, 1, 0, 0, 1]
 Solution 3 = [1, 0, 0, 0, 0, 1, 0, 0, 1, 0, 0, 0, 0, 1, 1, 0, 1, 0, 0, 1]
 Solution 4 = [1, 0, 0, 0, 0, 1, 0, 0, 1, 0, 0, 0, 1, 1, 1, 0, 1, 0, 0, 1]
 Solution 5 = [1, 0, 0, 1, 0, 0, 0, 0, 0, 1, 0, 0, 1, 1, 1, 0, 1, 0, 0, 1]
 Solution 6 = [1, 0, 0, 1, 0, 0, 0, 1, 0, 1, 0, 0, 1, 1, 1, 0, 1, 0, 0, 1]
 Solution 7 = [1, 0, 0, 1, 0, 1, 0, 0, 0, 0, 0, 0, 1, 1, 1, 0, 1, 0, 0, 1]
 Solution 8 = [1, 0, 0, 1, 0, 1, 0, 0, 0, 1, 0, 0, 1, 1, 1, 0, 1, 0, 0, 1]

The total number of permutations is 1 048 576 but there is only 29 different value of $h(x)$: there is only 8 permutation leading to a feasible solution, 82 permutations where one constraint is not satisfied and the larger number of unsatisfied constrained is 29.

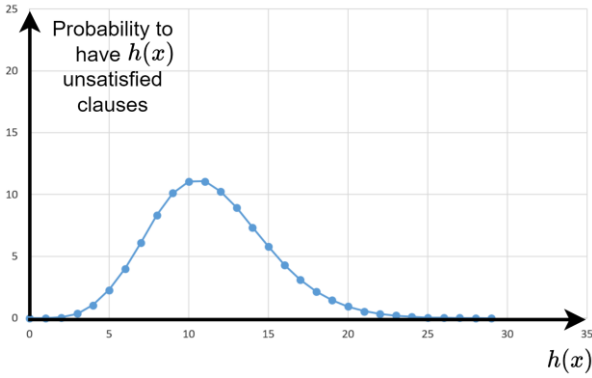


Figure 3. Initial distribution of solutions considering $h(x)$ - uf20-01.cnf

Table 2. Initial distribution of solution considering $h(x)$

$h(x)$	Number of solutions	Probability
0	8	0.000763
1	82	0.007820
2	648	0.061798
3	3745	0.357151
4	11047	1.053524
5	23921	2.281284
6	42032	4.008484
7	64051	6.108379
8	87545	8.348942
9	105946	10.103798
10	115744	11.038208
11	116202	11.081886
12	107416	10.243988
13	93822	8.947563
14	77199	7.362270
15	60595	5.778790
16	44949	4.286671
17	32450	3.094673
18	22658	2.160835
19	15100	1.440048
20	9811	0.935650
21	6022	0.574303
22	3491	0.332928
23	2110	0.201225
24	1056	0.100708
25	528	0.050354
26	260	0.024796
27	93	0.008869
28	40	0.003815
29	5	0.000477

A enumeration of permutations permits to prove that the high quality solutions have a very low probability (Fig. 3): the probability to obtain one solution (the 91 constraints are satisfied) is about 0.0007% and the higher probabilities are related to assignment with about 11 unsatisfied constraints.


The decile is 7 (with about 13% of the cumulated frequencies) i.e. we have a probability about 13% to have an assignment with less than 7 unsatisfied clauses. The cumulative frequency proves that we have a probability of 54% to have less than 11 clauses as stressed on table 2.

The genetic algorithm is used for optimization with $E = \{e_{0.01}; e_{0.05}; e_{0.1}\}$ considering the set of parameters introduced at the beginning of section 3.

Table 3. Final distribution

$h(x)$	Number of solutions	Probability
0	243	0.243
1	4015	4.015
2	19266	19.266
3	12770	12.770
4	11299	11.299
5	11965	11.965
6	9041	9.041
7	7580	7.580
8	6863	6.863
9	6269	6.269
10	3660	3.660
11	2902	2.902
12	1866	1.866
13	1072	1.072
14	646	0.646
15	310	0.310
16	129	0.129
17	60	0.060
18	33	0.033
19	7	0.007
20	3	0.003
21	1	0.001
30	0	0.000

The best found distribution $|\psi(\vec{\beta}^*, \vec{\gamma}^*)\rangle$ is estimated by sampling with 100 000 shots giving the final distribution of Fig. 4.

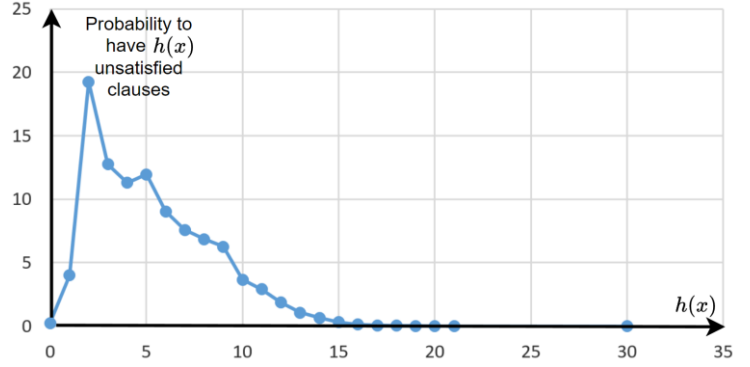**Figure 4.** Final distribution of solutions considering $h(x)$ – instance uf20-01.cnf

The information presented in Table 3 corroborates the observations from the visual representation, indicating notably high probabilities focused on low-cost solutions. This serves to underscore the effectiveness of the IQAOA method in resolving instances.

The probability to obtain a solution satisfying all the clauses is about 0.243% that is 318 times better than the 0.0007% of the initial distribution. Let us note that the decile is now 2 and we have a probability about 59% to have a solution with less than 5 unsatisfied clauses.

The second instance, identified as **uf20-02.cnf**, consists of 20 variables and 91 clauses, with 29 solutions satisfying all 91 clauses. The depictions of the distributions in Fig. 5 and Table 4 reveal a noteworthy shift in the probability distribution toward the left, now concentrating on high-quality solutions.

It should be noted in table 4 that, in the initial distribution, the median is 11 in the initial distribution, which means that 50% of the data corresponds to solutions with less than 11 unsatisfied clauses. The final sampling achieved at the end of the optimization gives:

- a median that values 6;
- A probability of 1.698% to satisfied all the clauses that is 613 times better than the 0.003% of the initial distribution.

Table 4. Initial and final distributions for instance uf20-02.cnf

$h(x)$	Probabilities	
	Initial distribution	Final distribution
0	0.003	1.698
1	0.021	2.757
2	0.085	7.315
3	0.291	8.797
4	0.769	11.727
5	1.679	11.528
6	3.246	12.155
7	5.394	11.538
8	7.797	9.275
9	10.055	7.771
10	11.653	5.671
11	12.228	3.953
12	11.578	2.578
13	10.104	1.522
14	8.203	0.822
15	6.095	0.489
16	4.242	0.194
17	2.786	0.109
18	1.717	0.047
19	0.979	0.036
20	0.532	0.009
21	0.279	0.002
22	0.146	0.004
23	0.069	0.003
24	0.031	
25	0.012	
26	0.004	
27	0.002	
28	0.001	
29	0.000	

The fact that the probability distribution only marks certain solutions, and that this distribution is very different from a uniform distribution, is clearly visible in the diagram in figure 5.

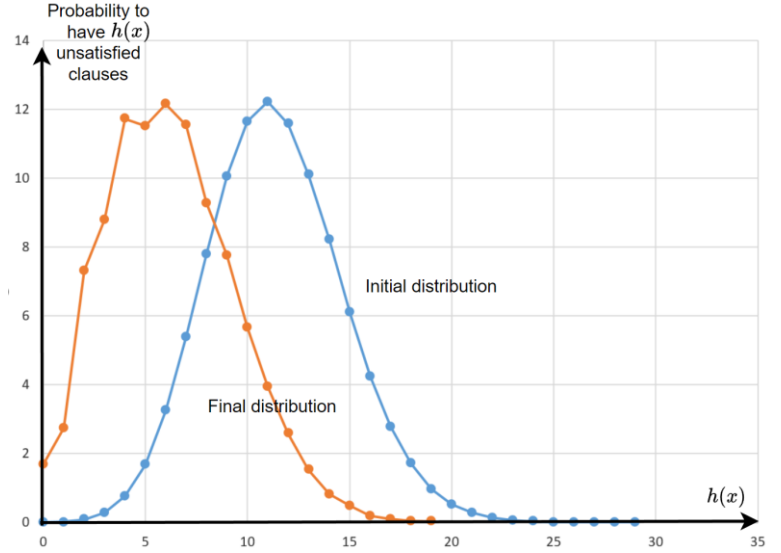


Figure 5. Comparison of initial and final distribution considering $h(x)$ – instance uf20-02.cnf

For the instance number 3 (uf20-03.cnf), there is only one assignment that permit to satisfy all the clauses (table 5) and the optimization permits to obtain a probability of 0.278% for $h(x) = 0$ and a decile that value 3 (table 5).

It's worth mentioning that $\sum_{x \in E} \langle \varphi(\vec{\beta}, \vec{\gamma}) | g(x) | \varphi(\vec{\beta}, \vec{\gamma}) \rangle$ is crucial for evaluating the distribution and variability of data, helping to identify potential outliers and extreme values.

Table 5. Initial and final distributions for instance uf20-03.cnf

$h(x)$	Probabilities in the final distribution
0	0.278
1	1.556
2	4.923
3	6.881
4	14.119
5	14.965
6	16.155
7	14.583
8	10.234
9	7.173
10	4.215
11	2.137
12	1.535
13	0.721
14	0.365
15	0.105
16	0.04
17	0.008
18	0.004
19	0.003
29	0.000

To obtain a probability distribution that concentrates probabilities on low- $h(x)$ solutions and avoids having a large number of values with residual probabilities we have to consider combinations of both the mean and a criterion related to the mean trend.

Definitions of $E = \{e_{p_1}; e_{p_2}; e_{p_3}; \dots; e_{p_k}\}$ with a large-enough k distinct probabilities, used to model the left-part of the distribution, favor concentration of probabilities on high-quality assignment.

A numerical test conducted and presented hereafter push us into considering that $E = \{e_{p_1}; e_{p_2}; e_{p_3}; \dots; e_{p_k}\}$ must be tuned depending on both instances and on the probabilities that is expected on high-quality solutions.

The experiments to highlight the importance of E in the final probabilities concentration on high quality solutions can be evaluated considering:

- the instance number 4 (uf20-04.cnf);
- a number of generations fixed to 500 for the Genetic Algorithm;
- the consecutive resolution with 4 set:
 1. $E_1 = \{e_{0.01}; e_{0.06}\}$
 2. $E_2 = \{e_{0.01}; e_{0.06}; e_{0.11}\}$
 3. $E_3 = \{e_{0.01}; e_{0.06}; e_{0.11}; e_{0.16}; e_{0.21}\}$
 4. $E_4 = \{e_{0.01}; e_{0.06}; e_{0.11}; e_{0.16}; e_{0.21}; e_{0.26}; e_{0.32}\}$

For the instance number 4 there is only 3 assignments satisfying the clauses:

Solution 1 = [1, 0, 1, 1, 0, 0, 0, 0, 0, 1, 0, 0, 1, 0, 0, 1, 1, 0, 0, 0]

Solution 2 = [1, 0, 1, 1, 0, 0, 1, 0, 0, 1, 0, 0, 1, 0, 0, 1, 1, 0, 0, 0]

Solution 3 = [1, 0, 1, 1, 0, 0, 1, 0, 0, 1, 1, 0, 1, 0, 0, 1, 1, 0, 0, 0]

The probability assigned to $h(x) = 0$ is about 0.0003%, the decile is 7 meaning that we have a probability of no more that 10% to have an assignment leading to less than 7 unsatisfied clauses and the median is 11. Much like the earlier instance, a sampling of permutations yields a comparable conclusion (refer to Table 6).

Table 6. Initial and final distributions for instance uf20-04.cnf depending on E

$h(x)$	Probabilities in				
	Initial distribution	final distribution			
		E_1	E_2	E_3	E_4
0	0.0003	0.012	0.045	0.983	1.226
1	0.0022	0.074	0.345	1.744	2.169
2	0.0278	1.819	1.792	12.604	5.24
3	0.1759	7.184	4.088	16.125	6.89
4	0.5805	16.99	7.352	19.043	8.987
5	1.4780	15.737	12.618	15.127	12.864
6	3.0790	15.623	17.594	13.053	13.8
7	5.4389	13.188	19.492	9.315	15.417
8	8.1277	11.535	16.848	4.908	13.087
9	10.4388	7.553	9.649	3.411	9.554
10	11.7940	4.769	5.445	2.075	5.683
11	12.1699	2.606	2.742	0.939	2.906
12	11.5840	1.437	1.228	0.434	1.224
13	10.1158	0.835	0.465	0.169	0.577
14	8.2635	0.387	0.19	0.043	0.236
15	6.1821	0.144	0.074	0.014	0.095
16	4.3645	0.064	0.022	0.005	0.032
17	2.8523	0.031	0.011	0.006	0.007
18	1.6858	0.009		0.002	0.005
19	0.9212	0.003		0.983	
20	0.4327				
21	0.1842				
22	0.0738				
23	0.0216				
24	0.0046				
25	0.0008				
26	0.0001				
27	0.0000				

The numerical experiments proposed on Table 6 demonstrate the significance of parameter E in the objective function, which allows for "controlling" the shape of the probability distribution.

A larger large-enough number of distinct probabilities in E , that is composed of low-level value (strictly lower than 0.5), increase the relative weigh of $\sum_{x \in E} \langle \varphi(\vec{\beta}, \vec{\gamma}) | g(x) | \varphi(\vec{\beta}, \vec{\gamma}) \rangle$ to $\langle \varphi(\vec{\beta}, \vec{\gamma}) | g(x) | \varphi(\vec{\beta}, \vec{\gamma}) \rangle$ and favor concentration on high-quality assignment i.e. concentration on assignment with very few unsatisfied clauses. The left-shift of distributions and the concentration on quality solutions is emphasized, for instance, in Fig. 6.

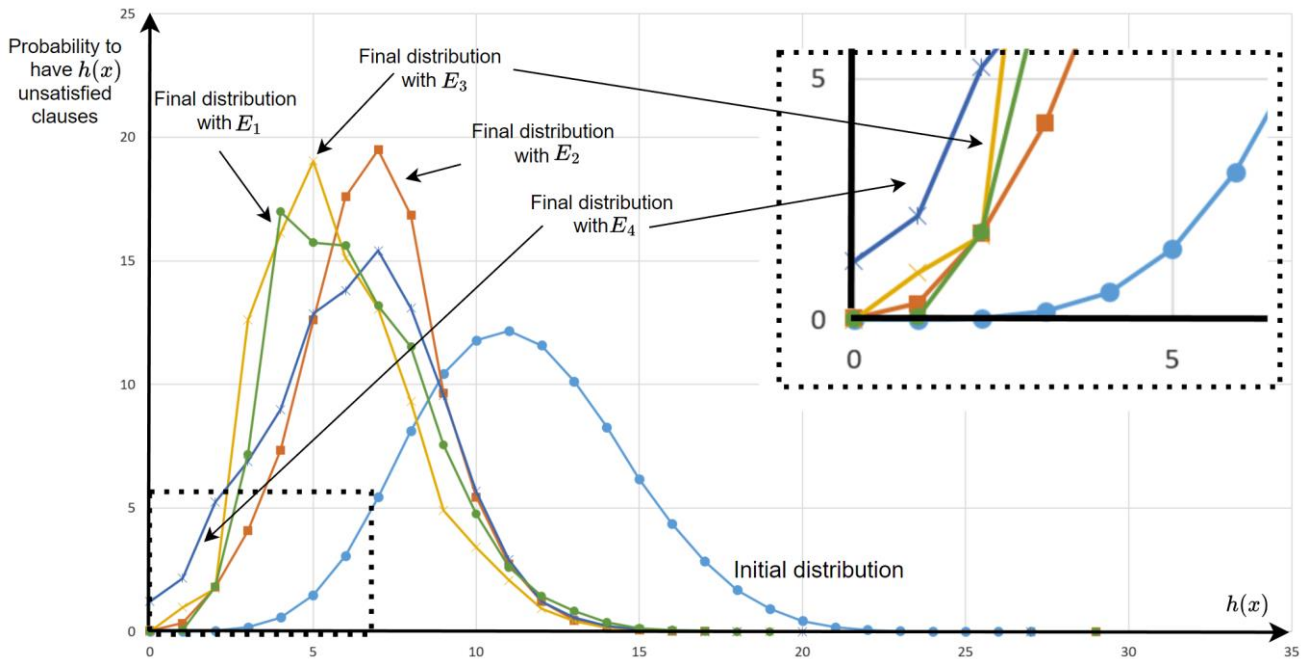


Figure 6. Comparison of final distribution according to E

Table 7. Final distributions for instance uf20-04.cnf with E_4 depending on the number of generations

$h(x)$	500 generations	1000 generations
0	1.226	3.243
1	2.169	9.422
2	5.240	19.996
3	6.890	17.314
4	8.987	11.344
5	12.864	8.875
6	13.800	10.543
7	15.417	7.788
8	13.087	4.554
9	9.554	2.640
10	5.683	1.942
11	2.906	1.095
12	1.224	0.719
13	0.577	0.236
14	0.236	0.138
15	0.095	0.095
16	0.032	0.032
17	0.007	0.014
18	0.005	0.008
19	0.001	0.002
20	0.000	0.000

These results prove that the IQAOA method succeeds into transforming the amplitude of an initial distribution into that of a target state. However, very large E should require more iterations of the method, since we can obtain objective function where $\sum_{x \in E} \langle \varphi(\vec{\beta}, \vec{\gamma}) | g(x) | \varphi(\vec{\beta}, \vec{\gamma}) \rangle$ that model the trend distribution on too large number of values, lies to objective function more complex to minimize.

This remark can be illustrated on table 7 considering $E_4 = \{e_{0.01}; e_{0.06}; e_{0.11}; e_{0.16}; e_{0.21}, e_{0.26}, e_{0.32}\}$ that is composed of 7 probabilities and Fig. 7 gives a graphical representation to highlight the impact of the number of generation.

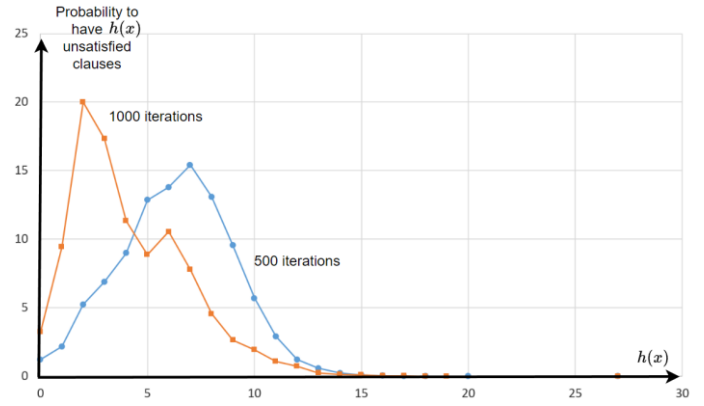


Figure 7. Importance of E related to the number of generations

The results proves that after 500 generations only the distribution is not yet concentrated on assignments with $h(x) \in \{0; 1\}$ and that 1000 generations are required to obtain a probability distribution concentrating on high-quality solutions (Fig. 7.).

4. Concluding remarks

This paper explores the application of the IQAOA approach to tackle the 3-SAT problem. The IQAOA method relies on an indirect representation of solutions through highly compact circuits with a minimal number of gates.

To achieve a probability distribution emphasizing high-quality solutions, particularly those with minimal unsatisfied clauses, the approach employs: 1) a dedicated objective function that combines both the mean and a criterion associated with the trend distribution; and 2) a genetic algorithm for determining the optimal parameters $(\vec{\beta}^*, \vec{\gamma}^*)$.

Evaluating the effectiveness of this method on 91-clauses and 12-variables instances showcases a probability distribution that concentrate on the solution that minimize the unsatisfied number of clauses. To the best of our knowledge, this represents the first quantum resolution to such large 3-SAT instances.

References

- Biere. M. Heule. H. van Maaren. and T. Walsh. editors. Handbook of Satisfiability. volume 185 of Frontiers in Artificial Intelligence and Applications. IOS Press. 2009.
- Bourreau E., G. Fleury and P. Lacomme (2023). Indirect Quantum Approximate Optimization Algorithms: application to the TSP. arXiv:2311.03294.
- Chvátal, V., Reed, B., 1992. Mick gets some (the odds are on his side) (satisfiability). In: Proceedings., 33rd Annual Symposium on Foundations of Computer Science. IEEE Computer Society, pp. 620–627.
- Franco J. and Paull M. (1983). Probabilistic analysis of the Davis Putnam procedure for solving the satisfiability problem. Discrete Appl. Math. Vol. 5 (1), pp. 77–87, Publisher: Elsevier.
- Hadfield S. (2018). Quantum Algorithms for Scientific Computing and Approximate Optimization. Submitted in partial fulfillment of the requirements for the degree of doctor of Philosophy in the Graduate School of Arts and Sciences. Columbia University.
- Knuth D. (1981). The art of computer programming. 3. Sorting and Searching. 2nd Ed. Addison-Wesley. Reading.
- Marques-Silva J.P. and Sakallah, K. (1999). Grasp: A search algorithm for propositional satisfiability. IEEE Trans. on Computers, Vol. 48(5), pp. 506–521.
- Laisant C.A. (1888). Sur la numération factorielle : application aux permutations. Bulletin de la S.M.F. tome 16. pp. 176-173.
- Lin S-W, T-F Wang, Y-R. Chen, Z. Hou, D. Sanan and Yon Shin Teo. (2023). A Parallel and Distributed Quantum SAT Solver Based on Entanglement and Quantum Teleportation. arXiv:2308.03344.
- Ming-Te C. and Franco J. (1990). Probabilistic analysis of a generalization of the unit clause literal selection heuristics for the k satisfiability problem. Inform. Sci. Vol. 51(3), pp. 289–314, Publisher: Elsevier.
- Paulet J.J., Luis F. LLana, Hernán Indíbil Calvo, M. Mezzini, F. Cuartero, and F.L. Pelayo. (2023) Heuristics for Quantum Computing Dealing with 3-SAT. Mathematic. Vol. 11, pp. 1888.
- Stephen A. Cook (1971). The complexity of theorem-proving procedures. In Proceedings of the 3rd Annual ACM Symposium on Theory of Computing, pp. 151–158, 1971.
- Varmantchaonala C.M., J.L. Kedieng Ebongue Fendji, J-P. Tchapel Njafa and M. Atemkeng. (2023). Quantum hybrid algorithm for solving SAT problem. Engineering Applications of Artificial Intelligence. Vo. 121.
- Yu Y., C. Cao, X-B Wang, N. Shannon and Robert Joynt. (2023). Solution of SAT problems with the adaptive-bias quantum approximate optimization algorithm. Physical Review Research, Vol. 5.