

Average distance in a hierarchical scale-free network: an exact solution

Zhongzhi Zhang^{1,2}, Yuan Lin^{1,2}, Shuyang Gao^{1,2}, Shuigeng Zhou^{1,2}, and Jihong Guan³

¹ School of Computer Science, Fudan University, Shanghai 200433, China

² Shanghai Key Lab of Intelligent Information Processing, Fudan University, Shanghai 200433, China

³ Department of Computer Science and Technology, Tongji University, 4800 Cao'an Road, Shanghai 201804, China

E-mail: zhangzz@fudan.edu.cn,sgzhou@fudan.edu.cn,jhguan@tongji.edu.cn

Abstract. Various real systems simultaneously exhibit scale-free and hierarchical structure. In this paper, we study analytically average distance in a deterministic scale-free network with hierarchical organization. Using a recursive method based on the network construction, we determine explicitly the average distance, obtaining an exact expression for it, which is confirmed by extensive numerical calculations. The obtained rigorous solution shows that the average distance grows logarithmically with the network order (number of nodes in the network). We exhibit the similarity and dissimilarity in average distance between the network under consideration and some previously studied networks, including random networks and other deterministic networks. On the basis of the comparison, we argue that the logarithmic scaling of average distance with network order could be a generic feature of deterministic scale-free networks.

PACS numbers: 89.75.Hc, 89.75.Da, 02.10.Ox, 05.10.-a

1. Introduction

In the last decade, a lot of authors in different scientific communities have made a concerted effort toward unveiling and understanding the generic properties of complex networked systems in nature and society [1, 2, 3, 4]. One of the most important discoveries is that despite network diversity, most real-life networks exhibit striking small-world behavior [5], that is to say, their average distance scales logarithmically with network order (number of nodes in a network), or slowly. Average distance is a fundamental measurement characterizing a complex network, which is relevant to many other structural features of the network, including degree distribution [6, 7], centrality [8], fractality [9, 10, 11], and so on. In addition, average distance has a strong effect on various dynamics running on networks, such as disease spreading [5], random walks [12], synchronization [13], amongst others. In view of its significance and usefulness, average distance has received considerable attention [14, 15, 16, 17, 18, 19, 20].

Apart from the small-world feature, a variety of real networks, particularly biological and social networks, also share two remarkable properties: scale-free behavior [21] and hierarchical structure [22, 23]. To mimic simultaneously the two prominent characteristics, Barabási, Ravasz and Vicsek proposed a deterministic model [24], hereafter called BRV model, which is the progenitor of deterministic models for complex networks and has led to an increasing number of theoretical investigations on deterministic networks that are an interesting class of networks and have been proved to be a useful tool [25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36]. Many structural and dynamical properties of the BRV model have been studied in much detail, including degree distribution [24], spectra of adjacency matrix [37], random walks [38], to name but a few. However, in spite of its importance, the exact knowledge of average distance for the BRV model remains not well understood.

To fill this gap, in this paper, we study the average distance in the BRV model, the deterministic nature of which makes it possible to investigate analytically the average distance. Based on the recursive relations derived from the self-similar structure of the BRV model, we obtain the closed-form solution for the average distance. The obtained rigorous result shows that the average distance behaves logarithmically with the network order. This logarithmic scaling has also been previously reported for many other deterministic scale-free networks. We thus conjecture that the logarithmic scaling characterizes the behavior of average distance for deterministic scale-free networks.

2. The hierarchical scale-free network

Let us first introduce the BRV model, a hierarchical scale-free network that is constructed in an iterative way [24]. We denote by H_g the BRV network model after g ($g \geq 0$) iterations (number of generations). Initially ($g = 0$), the network H_0 consists of a single root node labeled as $i = 1$. At the first generation ($g = 1$), two new nodes

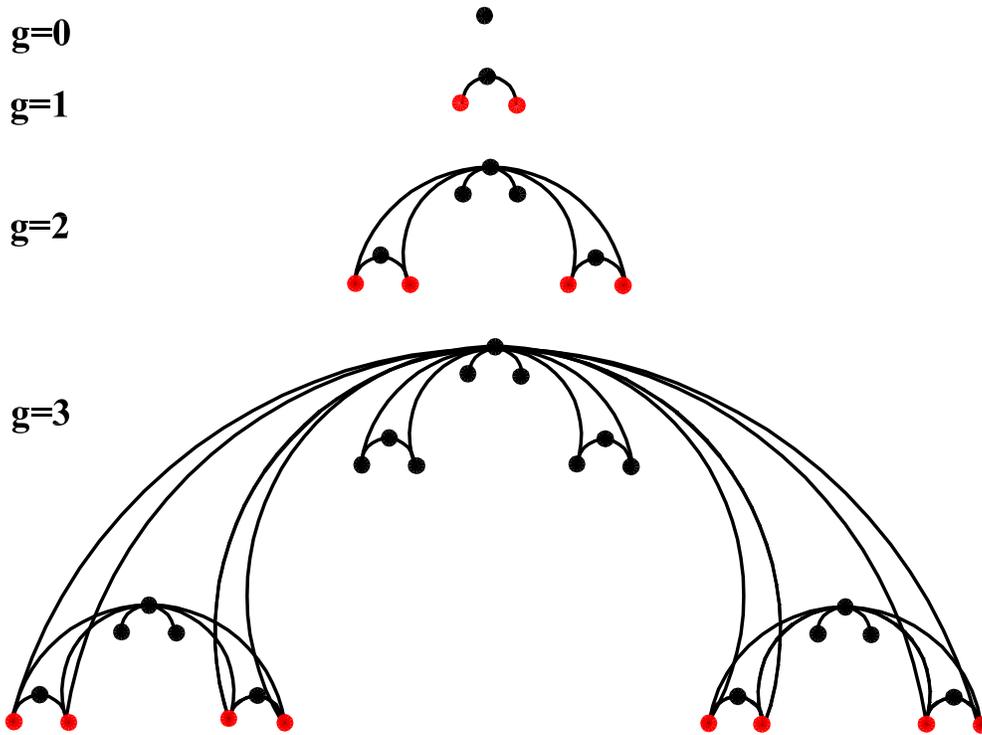


Figure 1. (Color online.) The iterative construction process of the BRV hierarchical scale-free network, showing only the first few iterations. The bottom nodes are depicted in red.

$i = 2, 3$ are added to the system and connected to the root node. Thus, we get H_1 , where node 1 is called hub node, the nodes $i = 2, 3$ are named bottom nodes forming a set represented as $\mathbb{B}_1 = \{2, 3\}$. At generation 2 (i.e., $g = 2$), we generate two copies of H_1 and connect the bottom nodes of each replica to the hub of the original H_1 . The hub of the original H_1 and the four bottom nodes in the replicas become the hub and bottom nodes of H_2 , respectively. The set of the bottom nodes belonging to H_2 is denoted as \mathbb{B}_2 . Suppose one has H_{g-1} ; the next generation network H_g can be obtained from H_{g-1} by adding two copies of H_{g-1} with their bottom nodes being linked to the hub of the original H_{g-1} . In H_g , its hub is the hub of the original H_{g-1} , its bottom nodes are composed of all the bottom nodes of both copies of H_{g-1} , and all the bottom nodes make the set \mathbb{B}_g . Repeat indefinitely the replication and connection steps, we obtain the hierarchical scale-free network. Figure 1 illustrates the construction process of the network for the first three iterations.

Some properties of the BRV model have been investigated in detail [37]. Let N_g be the number of nodes in H_g , the network of g th generation. By construction, at each new iteration, the number of network nodes increases by a factor of three, which together with the initial condition $N_0 = 1$ leads to $N_g = 3^g$. In H_g , the degree of all nodes and the

number of nodes having the same degree can be determined exactly [37]. For example, the degree of the hub node is $K_h(g) = 2(2^g - 1)$, and the degree of bottom nodes is $K_b(g) = g$. Again for instance, the cardinality, defined as the number of nodes in a set, of the set for the bottom nodes is $|\mathbb{B}_g| = 2^g$. The network is a sparse one with the mean degree averaged over all nodes being $\langle k \rangle_g = 4 \left[1 - \left(\frac{2}{3}\right)^g\right]$ which is approximately equal to 4 in the limit of infinite g .

The BRV model presents some typical properties of real-life systems [24, 37]. It is scale-free with the degree distribution exponent $\gamma = 1 + \frac{\ln 3}{\ln 2}$. In particular, the network has a crucial feature characterized by an obvious hierarchical structure that has also been observed in many real networks, e.g., metabolic networks [22, 27]. All these characteristics are not shared by other previous models. The peculiar structural characteristics make the network unique within the category of scale-free networks. It is the precursor, probably the first model for hierarchical scale-free networks. However, in spite of its importance, the rigorous knowledge of the average distance is still missing; its exact determination is the primary topic of this paper.

3. Closed-form solution to average distance

After introducing the hierarchical scale-free network, we now derive analytically the average distance. We represent all the shortest path lengths of network H_g as a matrix in which the entry $d_{ij}(g)$ is the distance between nodes i and j that is the length of a shortest path joining i and j . A measure of the typical separation between two nodes in H_g is given by the average distance d_g defined as the mean of distances over all pairs of nodes:

$$d_g = \frac{D_g}{N_g(N_g - 1)/2}, \quad (1)$$

where

$$D_g = \sum_{i \in H_g, j \in H_g, i \neq j} d_{ij}(g) \quad (2)$$

denotes the sum of the distances between two nodes over all couples. Notice that in Eq. (2), for a pair of nodes i and j ($i \neq j$), we only count $d_{ij}(g)$ or $d_{ji}(g)$, not both.

We continue by exhibiting the procedure of determining the total distance and present the recurrence formula, which allows us to obtain D_{g+1} of the $g + 1$ generation from D_g of the g generation. The hierarchical network H_g has a self-similar structure that allows one to calculate D_g analytically. According to the construction, see figure 2, network H_{g+1} is obtained by joining three copies of H_g that are labeled as $H_g^{(1)}$, $H_g^{(2)}$, and $H_g^{(3)}$. Using this self-similar property, the total distance D_{g+1} satisfies the recursion relation

$$D_{g+1} = 3D_g + \Delta_g, \quad (3)$$

where Δ_g is the sum over all shortest path length whose endpoints are not in the same $H_g^{(\varphi)}$ branch. The paths that contribute to Δ_g must all go through the hub node X ,

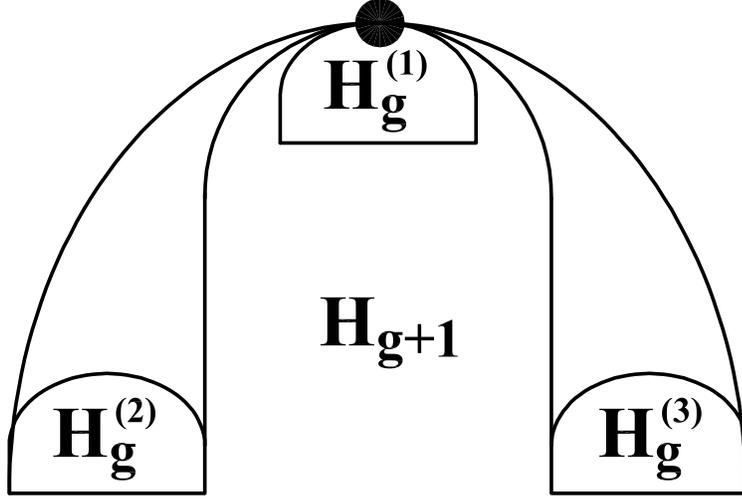


Figure 2. Schematic illustration of the means of construction of the hierarchical scale-free network. H_{g+1} is obtained by joining three replicas of H_g denoted as $H_g^{(\varphi)}$ ($\varphi = 1, 2, 3$), which are connected to one another at the hub node of $H_g^{(1)}$. The black node in the figure is the hub denoted by X (not labeled).

where the three copies of H_g are connected. Hence, to determine D_g , all that is left is to calculate Δ_g . The analytic expression for Δ_g , referred to as the crossing path length, can be derived as below.

Let $\Delta_g^{(\alpha,\beta)}$ be the sum of the lengths of all shortest paths whose endpoints are in $H_g^{(\alpha)}$ and $H_g^{(\beta)}$, respectively. Then the total sum Δ_g is given by

$$\Delta_g = \Delta_g^{(1,2)} + \Delta_g^{(1,3)} + \Delta_g^{(2,3)}. \quad (4)$$

By symmetry, $\Delta_g^{(1,2)} = \Delta_g^{(1,3)}$, so

$$\Delta_g = 2 \Delta_g^{(1,2)} + \Delta_g^{(2,3)}. \quad (5)$$

Having Δ_g in terms of the quantities of $\Delta_g^{(1,2)}$ and $\Delta_g^{(2,3)}$, the next step is to explicitly determine the two quantities.

To calculate the crossing distance $\Delta_g^{(1,2)}$ and $\Delta_g^{(2,3)}$, we give the following notation. For an arbitrary node v in network H_g , let $f_v(g)$ be the smallest value of the shortest path length from v to any of the 2^g bottom nodes belonging to \mathbb{B}_g , and the sum of $f_v(g)$ for all nodes in H_g is denoted by F_g . Analogously, in H_g let $h_v(g)$ denote the distance from a node v to the hub node X , and let M_g stand for the total distance between all nodes in H_g and the hub node X in H_g , including X itself. By definition, F_{g+1} can be given by the sum

$$\begin{aligned} F_{g+1} &= \sum_{v \in H_g^{(1)}} f_v(g+1) + \sum_{v \in H_g^{(2)}} f_v(g+1) + \sum_{v \in H_g^{(3)}} f_v(g+1) \\ &= \sum_{v \in H_g} [h_v(g) + 1] + 2 \sum_{v \in H_g} f_v(g) \\ &= 2 F_g + N_g + M_g, \end{aligned} \quad (6)$$

and M_{g+1} can be written recursively as

$$\begin{aligned}
M_{g+1} &= \sum_{v \in H_g^{(1)}} h_v(g+1) + \sum_{v \in H_g^{(2)}} h_v(g+1) + \sum_{v \in H_g^{(3)}} h_v(g+1) \\
&= \sum_{v \in H_g} h_v(g) + 2 \sum_{v \in H_g} [f_v(g) + 1] \\
&= M_g + 2(F_g + N_g).
\end{aligned} \tag{7}$$

Using $N_g = 3^g$, and considering $F_1 = 1$ and $M_1 = 2$, the simultaneous equations (6) and (7) can be solved inductively to obtain:

$$F_g = 3^{g-2}(4g - 1) \tag{8}$$

and

$$M_g = 2 \times 3^{g-2}(2g + 1). \tag{9}$$

With above obtained results, we can determine $\Delta_g^{(1,2)}$ and $\Delta_g^{(2,3)}$, which can be expressed in terms of these explicitly determined quantities. By definition, $\Delta_g^{(1,2)}$ is given by the sum

$$\begin{aligned}
\Delta_g^{(1,2)} &= \sum_{u \in H_g^{(1)}, v \in H_g^{(2)}} d_{uv}(g+1) \\
&= \sum_{u \in H_g^{(1)}, v \in H_g^{(2)}} [h_u(g) + 1 + f_v(g)] \\
&= \sum_{v \in H_g^{(2)}} \sum_{u \in H_g^{(1)}} h_u(g) + \sum_{u \in H_g^{(1)}} \sum_{v \in H_g^{(2)}} [1 + f_v(g)] \\
&= N_g M_g + (N_g)^2 + N_g F_g.
\end{aligned} \tag{10}$$

Inserting Eqs. (8) and (9) into (10), we have

$$\Delta_g^{(1,2)} = 9^{g-2}(8g + 2). \tag{11}$$

Proceeding similarly,

$$\begin{aligned}
\Delta_g^{(2,3)} &= \sum_{u \in H_g^{(2)}, v \in H_g^{(3)}} d_{uv}(g+1) \\
&= 2[(N_g)^2 + N_g F_g] \\
&= 9^{g-2}(8g + 8).
\end{aligned} \tag{12}$$

Substituting Eqs. (11) and (12) into (5), we get


$$\Delta_g = 9^{g-2}(24g + 12). \tag{13}$$

Substituting Eq. (13) into (3) and using the initial value $D_1 = 4$, we can obtain the exact expression for the total distance

$$D_g = 4g \times 9^{g-1}. \tag{14}$$

Then the analytic expression for average distance can be obtained as

$$d_g = \frac{8g \times 3^{g-2}}{3^g - 1}. \tag{15}$$

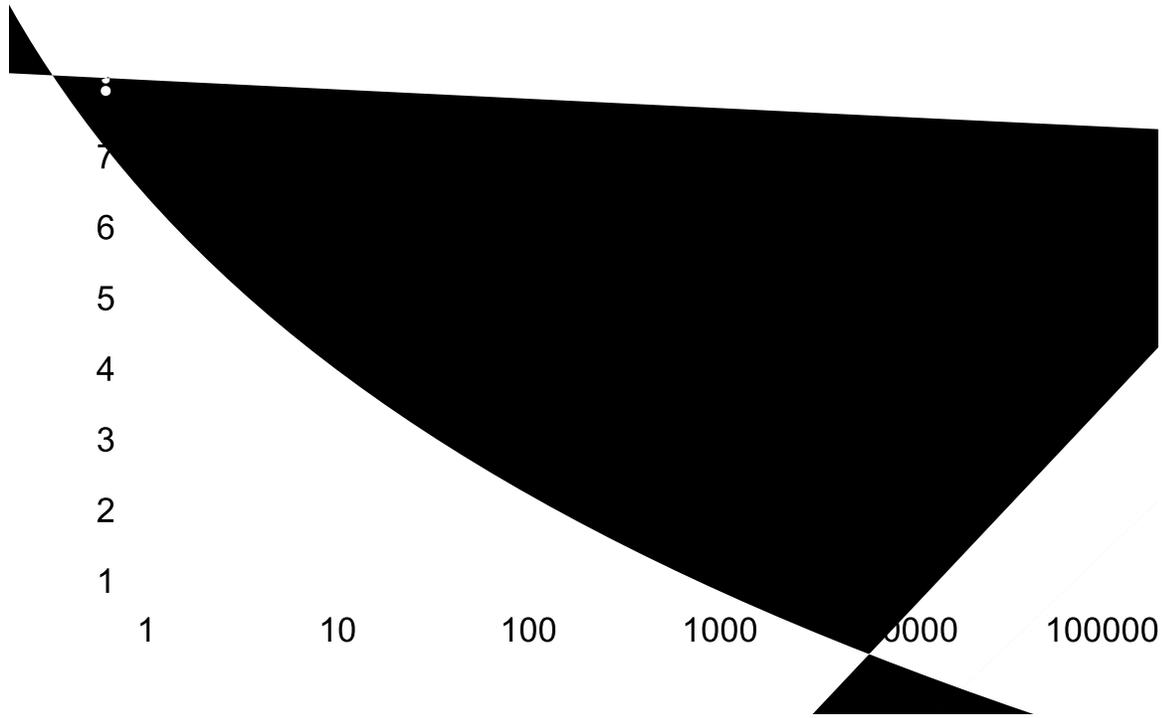

is consistent with the phenomenon observed for random scale-free networks by using numerical simulations [39, 40].

However, the deterministic network under consideration also exhibits some different aspects from the conventional (non-hierarchical) scale-free networks. For example, it has been suggested that for stochastic scale-free networks with degree distribution exponent $\gamma < 3$ and network order N , their average distance $d(N)$ behaves as a double logarithmic scaling with N : $d(N) \sim \ln \ln N$ [7, 6], which is in sharp contrast to the logarithmic scaling obtained for the BRV model addressed here, in despite of the fact that the latter has a degree distribution exponent $\gamma = 1 + \frac{\ln 3}{\ln 2}$ less than 3. Actually, this logarithmic scaling of average distance with network order has also been shown in other deterministic scale-free networks with $\gamma < 3$ [19, 25, 28, 36, 41, 42]. Thus, deterministic scale-free networks present an obvious difference from their stochastic scale-free counterparts in the aspect of structural property of average distance. We speculate that the logarithmic scaling for average distance can be used to establish the universality class for deterministic scale-free networks. Further studies are necessary to uncover the reasons for the similarity and dissimilarity between deterministic and random scale-free networks as regards average distance.

4. Conclusions

To conclude, scale-free behavior and hierarchical structure are ubiquitous in a variety of real-life systems. In this paper, we studied analytically the average distance of a deterministically growing scale-free hierarchical network introduced by Barabási, Ravasz and Vicsek [24], which can mimic some real-world networks to some extent. Based on the particular construction of the network, we obtained the rigorous solution to the average distance. We showed that in the infinite limit of network order N_g , the average distance d_g exhibits the scaling law as $d_g \sim \ln N_g$. We also showed that there are similarity and dissimilarity of the behaviors of average distance of deterministic and random scale-free networks. Finally, combining the obtained result and previous studies, we argued that the logarithmic scaling of average distance with network order may characterize deterministic scale-free networks.

Acknowledgment

This research was supported by the National Basic Research Program of China under grant No. 2007CB310806, the National Natural Science Foundation of China under Grant Nos. 60704044, 60873040 and 60873070, Shanghai Leading Academic Discipline Project No. B114, and the Program for New Century Excellent Talents in University of China (NCET-06-0376).

References

- [1] R. Albert and A.-L. Barabási, *Rev. Mod. Phys.* **74**, 47 (2002).

- [2] S. N. Dorogovtsev and J. F. F. Mendes, *Adv. Phys.* **51**, 1079 (2002).
- [3] M. E. J. Newman, *SIAM Rev.* **45**, 167 (2003).
- [4] S. Boccaletti, V. Latora, Y. Moreno, M. Chavez and D.-U. Hwang, *Phys. Rep.* **424**, 175 (2006).
- [5] D. J. Watts and H. Strogatz, *Nature (London)* **393**, 440 (1998).
- [6] F. Chung and L. Lu, *Proc. Natl. Acad. Sci. U.S.A.* **99**, 15879 (2002).
- [7] R. Cohen and S. Havlin, *Phys. Rev. Lett.* **90**, 058701 (2003).
- [8] S. N. Dorogovtsev, J. F. F. Mendes, and J. G. Oliveira, *Phys. Rev. E* **73**, 056122 (2006).
- [9] C. Song, S. Havlin, H. A. Makse, *Nature Phys.* **2**, 275 (2006).
- [10] Z. Z. Zhang, S. G. Zhou, and T. Zou, *Eur. Phys. J. B* **56**, 259 (2007).
- [11] Z. Z. Zhang, S. G. Zhou, L. C. Chen, and J. H. Guan, *Eur. Phys. J. B* **64**, 277 (2008).
- [12] S. Condamin, O. Bénichou, V. Tejedor, R. Voituriez, and J. Klafter, *Nature (London)* **450**, 77 (2007).
- [13] T. Nishikawa, A. E. Motter, Y.-C. Lai, and F. C. Hoppensteadt, *Phys. Rev. Lett.* **91**, 014101 (2003).
- [14] S. N. Dorogovtsev, J. F. F. Mendes, and A.N. Samukhin, *Nucl. Phys.* **653**, 307 (2003).
- [15] W. S. Lovejoy, C. H. Loch, *Soc. Netw.* **25**, 333 (2003).
- [16] A. Fronczak, P. Fronczak, and J. A. Hołyst, *Phys. Rev. E* **70**, 056110 (2004).
- [17] J. A. Hołyst, J. Sienkiewicz, A. Fronczak, P. Fronczak, and K. Suchecki, *Phys. Rev. E* **72**, 026108 (2005).
- [18] Z. Z. Zhang, S. G. Zhou, L. C. Chen, M. Yin, and J. H. Guan, *J. Phys. A: Math. Theor.* **41**, 485102 (2008).
- [19] Z. Z. Zhang, L. C. Chen, L. J. Fang, S. G. Zhou, Y. C. Zhang, and J. H. Guan, *J. Stat. Mech.: Theory Exp.* (2009) P02034.
- [20] A. Fekete, G. Vattay, and M. Pósfai, *Phys. Rev. E* **79**, 065101(R) (2009).
- [21] A.-L. Barabási and R. Albert, *Science* **286**, 509 (1999).
- [22] E. Ravasz, A. L. Somera, D. A. Mongru, Z. N. Oltvai, and A.-L. Barabási, *Science* **297**, 1551 (2002).
- [23] A. Clauset, C Moore, and M. E. J. Newman, *Nature (London)* **451**, 98 (2008).
- [24] A.-L. Barabási, E. Ravasz, and T. Vicsek, *Physica A* **299**, 559 (2001).
- [25] S. N. Dorogovtsev, A. V. Goltsev, and J. F. F. Mendes, *Phys. Rev. E* **65**, 066122 (2002).
- [26] S. Jung, S. Kim, and B. Kahng, *Phys. Rev. E* **65**, 056101 (2002).
- [27] E. Ravasz and A.-L. Barabási, *Phys. Rev. E* **67**, 026112 (2003).
- [28] J. D. Noh, *Phys. Rev. E* **67**, 045103(R) (2003).
- [29] J. D. Noh and H. Rieger, *Phys. Rev. E* **69**, 036111 (2004).
- [30] M. Hinczewski and A. N. Berker, *Phys. Rev. E* **73**, 066126 (2006).
- [31] H. D. Rozenfeld, S. Havlin, and D. ben-Avraham, *New J. Phys.* **9**, 175 (2007).
- [32] M. Hinczewski, *Phys. Rev. E* **75**, 061104 (2007).
- [33] Z. Z. Zhang, S. G. Zhou, T. Zou, L. C. Chen, and J. H. Guan, *Eur. Phys. J. B* **60**, 259 (2007).
- [34] Z. Z. Zhang, S. G. Zhou, L. J. Fang, J. H. Guan, and Y. C. Zhang, *EPL* **79**, 38007 (2007).
- [35] F. Comellas and A. Miralles, *Physica A* **388**, 2227 (2009).
- [36] Z. Z. Zhang, J. H. Guan, B. L. Ding, L. C. Chen, and S. G. Zhou, *New J. Phys.* **11**, 083007 (2009).
- [37] K. Iguchi and H. Yamada, *Phys. Rev. E* **71**, 036144 (2005).
- [38] E. Agliari and R. Burioni, *Phys. Rev. E* **80**, 031125 (2009).
- [39] P. Holme and B. J. Kim, *Phys. Rev. E* **65**, 026107 (2002).
- [40] Z. Z. Zhang, L. L. Rong, B. Wang, S. G. Zhou, and J. H. Guan, *Physica A* **380**, 639 (2007).
- [41] Z. Z. Zhang, S. G. Zhou, and L. C. Chen, *Eur. Phys. J. B* **58**, 337 (2007).
- [42] Z. Z. Zhang, L. C. Chen, S. G. Zhou, L. J. Fang, J. H. Guan, and T. Zou, *Phys. Rev. E* **77**, 017102 (2008).