

A prototype Malayalam to Sign Language Automatic Translator

Jestin Joy

AI Lab

Department of Computer Applications
CUSAT

jestinjoy@gmail.com

Kannan Balakrishnan

Head of the Department

Department of Computer Applications
CUSAT

mullayilkannan@gmail.com

Abstract

Sign language, which is a medium of communication for deaf people, uses manual communication and body language to convey meaning, as opposed to using sound. This paper presents a prototype Malayalam text to sign language translation system. The proposed system takes Malayalam text as input and generates corresponding Sign Language. Output animation is rendered using a computer generated model. This system will help to disseminate information to the deaf people in public utility places like railways, banks, hospitals etc. This will also act as an educational tool in learning Sign Language.

1 Introduction

According to World Federation of the Deaf (WFD), there are approximately 70 million deaf people in the world. Census 2001 estimates no people with hearing disability at 1,261,722. But the number of sign language interpreters is only

there are systems for converting text to ISL in other languages.

Just before the animation stage, current systems make use of an intermediate format for storing sign language. HamNoSys(Hamburg Notation System), developed at University of Hamburg is a widely used one. Projects like ViSiCAST use this notation for generating gestures. (Elliott et al.(2000)Elliott, Glauert, Kennaway, and Marshall) Our system follows an approach of directly converting user input to animation, without using any intermediate notation.

TESSA is a system for translating speech to British Sign Language (BSL). (Cox et al.(2002)Cox, Lincoln, Tryggvason, Nakisa, Wells, Tutt, and Abbott) It is meant for use post office and follows a phrase lookup approach. San Segundo et al.(2006)San Segundo, Barra-Chicote, Luis Fernando, Montero, de Córdoba, and Ferreiros; San-Segundo et al.(2012)San-Segundo, Montero, Crdoba, Sama, Fernandez, DHaro, Lpez-Ludea, Snchez, and Garca; San-Segundo et al.(2008)San-Segundo, Montero, Macías-Guarasa, Córdoba, Ferreiros, and Pardo) proposed a system for converting spanish to sign language using a rule based approach. Most of the systems developed are domain specific.

INDian Gestural Interaction Translator (INGIT) is a system for converting Hindi strings to ISL for possible use in Indian Railways reservation counter. (Kar et al.(2007)Kar, Reddy, Mukherjee, and Raina) It depends on HamNoSys. Raghavan et al.(2013)Raghavan, Prasad, Muraleedharan, and Geetha) proposed a notation based approach for English to ISL translation. It uses a representation for animation and while transforming text to ISL, it queries database. Dasgupta and Basu(2008)) proposed an english text to ISL system. It takes English sentences as input, performs analysis and generates corresponding ISL. In it output is represented in terms of prerecorded video streams. (Dasgupta and Basu(2008))

4 System Architecture

The proposed system works by taking Malayalam text as input. The first stage is the POS tagger. Morphological analysis is done to accomplish this. During this step various part of speeches are identified. Then this is fed to optimizer, which removes unwanted words. Output of this module is then given to stemming module, which finds

the root word. This is then fed to the animation module. Animation module animates the 3D human character based on the input recieved from the stemming module. Following figure illustrates the whole process.

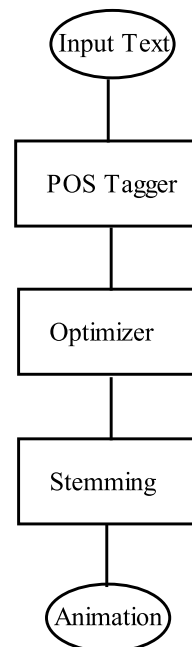


Figure 1: Design

While converting text to ISL, all the input are not directly translated to corresponding sign language. Sign language omits certain words. These task is accomplished with the help of the optimizer module. The words in input text needs to be transformed to the root form before converting it to sign language. Stemming module does this job. After this step we will be getting a sequence of words ready to be converted into sign language. Output from this step is fed to the animation module. For this a properly rigged human character is used. A rule based approach is used to map output generated by stemming module to the animation module.

5 Results

For visualisation, a 3 dimensional (3D) computer generated model is used. Animation is done in Free Software tools running on Debian GNU Linux. Animation is modelled as a sequence of key frames. Based on the user input different key frames are nicely blend to produce the corresponding animation. As of now, except complex facial expressions, other features are modelled. Unlike

systems that use an intermediate notation to denote sign language, we are directly converting the input to sign language. This reduces the complexity of converting between different formats.

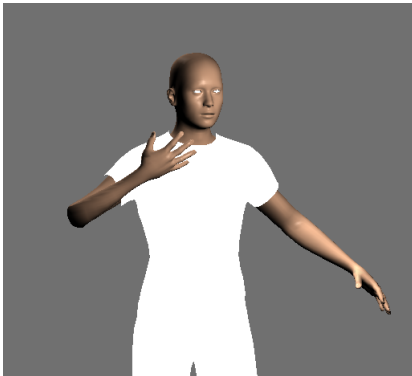


Figure 2: Animation side view

The animation can also be exported to run on smart phones.

6 Conclusion and Future Work

This paper presents a prototype Malayalam text to sign language translation system. This paper stresses the need to develop a standardised system for sign language learners in Kerala. The system proposed in this paper can be utilised as a system for standardising sign language use in Kerala. This can easily be ported to mobile handsets and tablets. This system can be also extended to convert text from web sites to sign language form.

As one of the first attempt in Malayalam text to ISL conversion, we hope this work will lead to more developments in social and technological front and thus will result in the development of a standardised system for sign language learners.

References

- ASLLRP. 2014. American sign language linguistic research project(asllrp). <http://secrets.rutgers.edu/dai/queryPages/>. Accessed: 2014-10-22.
- Cox, Stephen, Michael Lincoln, Judy Tryggvason, Melanie Nakisa, Mark Wells, Marcus Tutt, and Sanja Abbott. 2002. Tessa, a system to aid communication with deaf people. In *Proceedings of the Fifth International ACM Conference on Assistive Technologies*. ACM, New York, NY, USA, Assets '02, pages 205–212.
- Crystal, David. 1998. *The Cambridge encyclopedia of language*, volume 2. Cambridge Univ Press.

- Dasgupta, Tirthankar and Anupam Basu. 2008. Prototype machine translation system from text-to-indian sign language. In *Proceedings of the 13th international conference on Intelligent user interfaces*. ACM, pages 313–316.
- Elliott, R., J. R. W. Glauert, J. R. Kennaway, and I. Marshall. 2000. The development of language processing support for the visicast project. In *Proceedings of the Fourth International ACM Conference on Assistive Technologies*. ACM, New York, NY, USA, Assets '00, pages 101–108.
- George, Karimpumannil Mathai. 1972. *Western influence on Malayalam language and literature*. Sahitya Akademi.
- Kar, Purushottam, Madhusudan Reddy, A Mukherjee, and Achla M Raina. 2007. Ingit: Limited domain formulaic translation from hindi strings to indian sign language. *ICON*.
- Neidle, Carol Jan. 2000. *The syntax of American Sign Language: Functional categories and hierarchical structure*. MIT Press.
- Raghavan, R.J., K.A. Prasad, R. Muraleedharan, and M. Geetha. 2013. Animation system for indian sign language communication using lots notation. In *Emerging Trends in Communication, Control, Signal Processing Computing Applications (C2SPCA), 2013 International Conference on*. pages 1–7.
- San-Segundo, R., J.M. Montero, R. Crdoba, V. Sama, F. Fernandez, L.F. DHaro, V. Lpez-Ludea, D. Snchez, and A. Garca. 2012. Design, development and field evaluation of a spanish into sign language translation system. *Pattern Analysis and Applications* 15(2):203–224.
- San Segundo, Rubén, Roberto Barra-Chicote, D'Haro Luis Fernando, Juan Manuel Montero, Ricardo de Córdoba, and Javier Ferreiros. 2006. A spanish speech to sign language translation system for assisting deaf-mute people. In *INTERSPEECH*.
- San-Segundo, Rubén, Juan Manuel Montero, Javier Macías-Guarasa, R Córdoba, Javier Ferreiros, and José Manuel Pardo. 2008. Proposing a speech to gesture translation architecture for spanish deaf people. *Journal of Visual Languages & Computing* 19(5):523–538.