

Impossibility Results for Grammar-Compressed Linear Algebra

Amir Abboud* Arturs Backurs† Karl Bringmann‡ Marvin Künnemann§

Abstract

To handle vast amounts of data, it is natural and popular to compress vectors and matrices. When we compress a vector from size N down to size $n \ll N$, it certainly makes it easier to store and transmit efficiently, but does it also make it easier to process?

In this paper we consider lossless compression schemes, and ask if we can run our computations on the compressed data as efficiently as if the original data was that small. That is, if an operation has time complexity $T(\text{input-size})$, can we perform it on the compressed representation in time $T(n)$ rather than $T(N)$? We consider the most basic linear algebra operations: inner product, matrix-vector multiplication, and matrix multiplication. In particular, given two compressed vectors, can we compute their inner product in time $O(n)$? Or perhaps we must decompress first and then multiply, spending $\Omega(N)$ time?

The answer depends on the compression scheme. While for simple ones such as Run-Length-Encoding (RLE) the inner product can be done in $O(n)$ time, we prove that this is impossible for compressions from a richer class: essentially n^2 or even larger runtimes are needed in the worst case (under complexity assumptions). This is the class of *grammar-compressions* containing most popular methods such as the Lempel-Ziv family. These schemes are more compressing than the simple RLE, but alas, we prove that performing computations on them is much harder.

1 Introduction

The idea of using compression to speed up computations can be found in any domain that deals with large-scale data, and ML is no exception. By exploiting redundancies and various forms of structure in a piece of data, compression algorithms such as zip can reduce its size from N down to n , where $n \ll N$. The data becomes cheaper to store, access, transmit, and perhaps also to analyze. Can we run our ML tools on the compressed data, without decompressing it first, and make the computation times proportional to n rather than N ? Since most ML algorithms boil down to large amounts of basic algebraic operations such as multiplications of vectors and matrices, with *inner product* as the atomic operation, the most basic question in this context is:

Main Question. Given two N -dimensional vectors, each in a compressed form of size $n \ll N$, can we compute their inner product in $\tilde{O}(n)$ time¹ rather than $O(N)$?

The answer, of course, depends on the compression scheme that we use. There seems to be an inherent tension: more complex schemes have higher compression rates but are harder to analyze without decompression.

First, let us clarify that our interest is in exact computations and *lossless* compressions, even though lossy techniques such as dimensionality reduction [16] are widely used by the ML community. In many cases, e.g. when performing a basic algebraic operation within a larger pipeline, even a small amount of error could add up to make the final result unintelligible. Recent years has seen a growing interest in exploring the potential of lossless compression for speeding up ML [35, 83, 59, 65]. An inspiring result was honorably

*IBM Almaden Research Center, amir.abboud@gmail.com

†Toyota Technological Institute at Chicago, backurs@ttic.edu. Supported by an NSF Grant CCF-2006806.

‡Saarland University and Max Planck Institute for Informatics, Saarland Informatics Campus, bringmann@cs.uni-saarland.de. This work is part of the project TIPEA that has received funding from the European Research Council (ERC) under the European Unions Horizon 2020 research and innovation programme (grant agreement No. 850979).

§Max Planck Institute for Informatics, Saarland Informatics Campus, marvin@mpi-inf.mpg.de

¹We use the notation $\tilde{O}(n) = n \cdot N^{o(1)}$ for near-linear time, hiding small terms such as log factors.

Table 1: The potential savings from grammar-compressed linear algebra: Compression rates on real datasets. We compare zip, a standard grammar-compression, with Run Length Encoding (RLE), a simple method that works well on repetitive or sparse data. For more such results, see [35, Table 1].

Dataset	Size	RLE (compression rate)	zip (compression rate)
ISOLET [30]	30.94 MB	29.83 MB (0.96)	7.94 MB (0.26)
US Census 1990 [30]	342.26 MB	341.97 MB (0.99)	51.91 MB (0.15)

mentioned as an outstanding paper at NeurIPS last year [65]: any $N \times d$ matrix A can be compressed down to a matrix of size $d \times d$ such that the optimal solutions of Least-Mean-Squares (LMS) instances are exactly the same on A and A' . This is an example where for a specific task (LMS solvers) a specific compression scheme (designed by the authors) leads to a solution in time $T(n)$ rather than $T(N)$, giving a 100x speedup on benchmark data; it makes one wonder if this approach can work in a more general setting.

For rather simple compression methods, the answer to our question is positive. A recent Communications of the ACM article [35] exhibits *Compressed Linear Algebra* [32, 33, 34] a compression scheme for vectors and matrices that uses simple techniques such as Run Length Encoding (RLE) and allows for fast computations on the compressed data with impressive experimental results when integrated into ML systems. The RLE encoding of a vector simply replaces runs of values by tuples indicating the value and the length of the run; e.g. the binary vector 00011111000 gets encoded as $0^3 1^5 0^3$. Given two vectors encoded in this way with size n_{RLE} , a simple one-pass algorithm can compute their inner product in $O(n_{RLE})$ time. Before that, there were many algorithms for exploiting succinct encodings of *sparse* vectors [78, 56, 52]; e.g. by simply listing the nonzero locations the binary vector 0100001000 gets encoded as (2, 7). These encodings allow for a linear time inner product computation as well.

However, these simple methods are often not very compressing. At the other end of the spectrum, we have the heavy-duty and time-tested family of *Grammar-Compressions* [54] that includes the Lempel-Ziv-family (LZ77, LZ78, LZW, etc.) [58, 91, 86], Byte-Pair Encoding [82], dictionary methods, and others [69, 63]. These compressions are used in ubiquitous applications such as zip, Snappy, GIF, PNG, the built-in Unix utility `compress`, and even in PDF. Their compression rates are often on a whole different level compared to RLE; e.g. the current draft of this paper reduces from 10KB to 4KB with zip but RLE has no effect. See Table 1 and [35, Table 1] for empirical data showing the quantitative potential of these methods for some standard ML datasets. What all these more elaborate compression techniques have in common is that they essentially (up to low order terms [76]) encode a string (or vector) by a *Straight-Line Program* (SLP): a restricted kind of a context-free grammar that can only produce one string. In more detail, an SLP is defined over some alphabet Σ , say $\{0, 1\}$, and it is a set of replacement rules (or productions) of a very simple form: a rule is either a symbol in Σ or it is the concatenation of two previous rules (under some fixed ordering of the rules). The last replacement rule is the sequence defined by the SLP. For example, we can compress the sequence 01010101 with the rules $S_1 \rightarrow 0$; $S_2 \rightarrow 1$; $S_3 \rightarrow S_1 S_2$; $S_4 \rightarrow S_3 S_3$; $S_5 \rightarrow S_4 S_4$ and S_5 corresponds to the sequence 01010101. See Figure 1. For some strings this can give an exponential compression, e.g. the sequence $(01)^N$ requires only $O(\log N)$ rules; note that its RLE has size N . While finding the smallest SLP for a given string is NP-Hard, it can be approximated either by the above practical methods or provably up to logarithmic factors [76, 20, 79, 48, 50].

Thus, the holy grail in this context is to perform algebraic operations in $T(\text{compression-size})$ time *even when* the vectors are compressed with zip or one of the other heavy-duty grammar compressions; that is, without unzipping them first. Ideally, we would implement a “zip-inner-product” function that takes two zip files encoding vectors and computes the inner product in near-linear time (which may not even be enough time to unzip them). A recent paper titled “When LZW meets ML” [59] makes partial progress towards this goal: the inner product can be computed efficiently on their *tuple oriented coding* where each *coordinate* is grammar-compressed separately, but not the vector as a whole. This makes their method less compressing since, unlike with zip, the size of the encoding is always at least the dimensionality of the vectors.

Main Question (Restated). Given two N -dimensional vectors, each grammar-compressed down to size $n \ll N$, can we compute their inner product in $\tilde{O}(n)$ time rather than $O(N)$?

While efficiently analyzing these grammars may seem like a daunting task, a large body of works over the

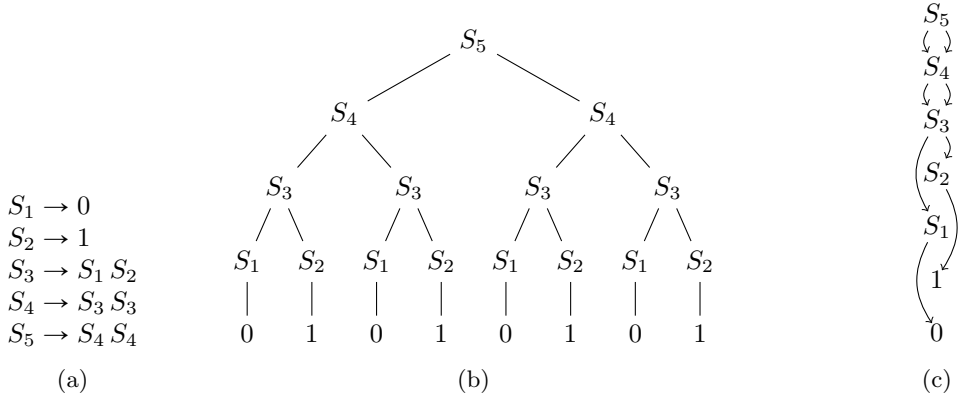


Figure 1: (a) An SLP generating the sequence 01010101. (b) The corresponding parse tree. (c) The acyclic graph corresponding to the SLP.

last three decades has equipped us with an ingenious toolbox exactly for this purpose. It turns out that many important problems can indeed be solved surprisingly faster than the decompress-then-solve bound, e.g. in pattern matching [71, 53, 11, 36, 18, 61, 40, 45, 49]. This gives hope for a positive answer to our question and that many ML computations could be sped up by operating on grammar-compressions. These algorithms typically look at the parse trees that have N leaves but only n distinctly labelled internal nodes (see Figure 1), and traverse them starting from the root down, while attempting to only spend time proportional to the depth of the tree per distinct label. Using tricks that restructure the grammar to make the tree balanced, the depth can be upper bounded by $O(\log N)$, making the total time $O(n \log N)$. To learn more about this subfield of Algorithm Design, we refer the reader to the surveys [90, 57, 39, 81, 41, 73, 77, 64, 80].

1.1 Our Results

Alas, our main result is a negative resolution to the main question above. We apply the tools of theoretical computer science, and the recently blossoming field of *fine-grained complexity*, in order to shed light into the mathematical foundations of Compressed Linear Algebra. We prove new hardness reductions showing cases where the time to compute the inner product must be large (under popular complexity assumptions) even when the vectors have very small grammar compressions. For example, there are N -dimensional vectors with grammar-compressions of size $n = O(N^{1/3})$ where the inner product must take $\tilde{\Omega}(n^2)$ time² to compute. The consequences to other settings such as matrix-vector multiplication are further explained below. This creates a strong separation between grammar-compressions, where we prove an $\tilde{\Omega}(n^2)$ lower bound, and RLE, where an $O(n)$ algorithm exists. This formally justifies the use of simpler methods in ML systems and guides researchers away from searching for an ultra-efficient “zip-inner-product” function.

Fine-Grained Complexity Negative results are paramount to the success of any scientific discipline. The most prominent framework for proving such results in computer science is the theory of NP-Hardness, where one proves that a problem cannot be solved in polynomial time unless $P = NP$ which would imply breakthrough algorithms for famously-hard problems such as SAT and Subset Sum. Without this theory, countless hours would have been wasted by algorithm designers trying to come up with provable, worst-case, polynomial time algorithms for NP-Hard problems. Due to the increase in data sizes of recent years, the ethos of this theory that “efficient = polynomial” has become obsolete, and a more demanding attitude where “efficient = linear” has arisen. By replacing the polynomial reductions of NP-Hardness with more efficient ones (often linear), fine-grained complexity can prove hardness results even for problems that have polynomial time algorithms. Exemplary results show that linear or subquadratic algorithms for certain problems, which admit quadratic-time algorithms, would refute popular assumptions (conjectures that are similar to but stronger than $P \neq NP$) and have breakthrough consequences for famously hard problems.

²The more standard notation is $n^{2-o(1)}$ which indicates an $\Omega(n^{1.9999})$ lower bound, no matter how close to 2 we go. That is, only mildly subquadratic algorithms are possible, e.g. by shaving log factors.

One of the central assumptions in this theory and in this paper is the 3SUM Conjecture: “No algorithm can decide, in subquadratic $O(n^{2-\varepsilon})$ time, if there are three numbers that sum to zero among a given set of n numbers”. A recent survey on fine-grained complexity [89] cites dozens of papers, mainly in computational geometry [38] but also in other fields [72, 85, 7, 8, 21, 55, 10, 43], that prove 3SUM-Hardness results showing that their algorithms are optimal up to a refutation of this conjecture. In this paper, we prove the first 3SUM-Hardness results in ML^3 as far as we are aware. The 3SUM assumption and its generalizations that we use in the theorems below are formally defined and discussed in Section 2.

Vector Inner Product Our first and main result is a reduction from 3SUM to compressed inner product of two vectors, negatively resolving our main question.

Theorem 1.1. *Assuming the 3SUM conjecture, the inner product of two N -dimensional vectors that are grammar-compressed to size $n = \Theta(N^{\frac{1}{4}})$ cannot be computed in $O(n^{2-\varepsilon})$ time where $\varepsilon > 0$.*

Moreover, we strengthen and generalize this result in several ways. First, we address the dependence between n and N : could it be that for more or less compressed vectors the picture is different? Using a stronger variant of the 3SUM conjecture, the same lower bound of n^2 holds even when $n = N^{1/3}$, and therefore our result can be stated as an $\tilde{\Omega}(N^{\frac{2}{3}})$ lower bound which is quite close to the trivial upper bound of $O(N)$. Moreover, by a (highly nontrivial) boosting of our reduction, in Section 3 we establish an $\tilde{\Omega}(N^{\frac{1}{3}})$ lower bound with $n = N^\varepsilon$ for any $\varepsilon \leq 1/3$. That is, when the vectors are highly compressed even n^{10} time is not sufficient⁴; this is in stark contrast to the case of RLE-compressed vectors where $O(n)$ is always possible.

Matrix-Vector Multiplication Next, we consider the problem of computing the $M \cdot v$ product of an N -dimensional vector v that is compressed to size n with an $N \times N$ matrix M where each row is compressed to size $O(n)$. Perhaps computing these N inner products as a batch can be done faster than computing each separately. Alas, by another significant boosting of our reduction we prove that this is also impossible. While if the encoding is with RLE the product can be computed in $O(Nn)$ time, which is linear in the representation size of the matrix and thus optimal, it turns out that for grammar compressions $\tilde{\Omega}(Nn^2)$ is required. The proof is in Section 4.

Theorem 1.2. *Assuming the 3SUM conjecture, the product of an $N \times N$ -dimensional matrix, where each row is grammar-compressed to size $n = \Theta(N^{\frac{1}{2}})$, with an N -dimensional vector that is grammar-compressed to size n cannot be computed in $O(Nn^{2-\varepsilon})$ time where $\varepsilon > 0$.*

Matrix Multiplication Finally, we consider matrix multiplication of compressed matrices $C = A \cdot B$. There are multiple ways to compress an $N \times N$ matrix: we might compress each row or each column, so that the compression size is $N \cdot n$, or treat the whole matrix as an N^2 -dimensional vector and compress it to size n . Each way may lead to a different time complexity, but no matter which way we choose, the first question to ask, and that will determine the time we can hope for, is: what is the output size? The naïve answer is that the matrix C has size $N \times N$, but since A and B are compressed, shouldn't we expect C to also be representable with a small grammar of size $n \ll N^2$? Unlike the above questions that deal with computation time, this is an information-theoretic question, and in Section 5 we give strong and unconditional negative answers: the matrix C cannot be grammar-compressed to size $o(N^2/\log^2 N)$ even when A and B are strongly compressible. Moreover, some of our results hold even when A and B have very small RLE encodings. Therefore, our results should be of interest to the compressed linear algebra project beyond grammar-compressions.

³We remark that *some* complexity assumption is necessary for proving the kind of results we are interested, since unconditionally proving even very weak lower bounds on the time complexity such as $\Omega(n^{1+\varepsilon})$ and even for NP-Hard problems like SAT (not to mention inner product) is far beyond current techniques [12].

⁴Strictly speaking, such a conditional lower bound of $\Omega(n^{10})$ for *highly compressible* inputs can already be proven by combining a known #P-hardness reduction from SubsetSum [60] with a fine-grained hardness of SubsetSum under the Exponential Time Hypothesis (see, e.g. [47]). However, such an approach yields only a weak lower bound in terms of the uncompressed size N , namely a bound of $\Omega(N^\varepsilon)$ for some non-explicit, possibly tiny ε . Our lower bounds always give an explicit, reasonably large value for ε .

Technical Remarks While the tools for proving NP-Hardness results for grammar-compressed data are old [64], they only apply in the unrealistic setting where $n = \log N$, and we are interested in more fine-grained results. Only recently, a FOCS paper by the authors [2] introduced the techniques for proving such lower bounds. This previous work focused on combinatorial pattern matching problems and the current work extends it to the setting of linear algebra. Our results establish the hardness even of the simplest setting of binary vectors and matrices over $\{0, 1\}$. This setting is particularly studied due to its connection to graphs, where grammar compressions have also received a lot of attention [66, 67]. Moreover, we show that even deciding if the inner product is 0 or ≥ 1 is hard, and so our lower bounds hold against any bounded approximation algorithms. Extending the lower bounds to other functions such as computing the ℓ_2 distance between two vectors is also easy. Like almost all results in fine-grained complexity [89], our lower bounds are against both deterministic and randomized algorithms.

Finally, we remark that our lower bounds are for the most basic setting of *worst-case* instances. Extending them to *average-case* results, showing that instances that come from certain natural distributions are also hard, is an open question. However, notice that even if the original vectors come from a natural distribution, the distribution of the grammar representations will be completely different (and probably far from natural). Therefore, exploiting the structure of non-worst-case instances seems far beyond current reach in this context.

1.2 Other Related Works

There have been a few recent works showing fine-grained complexity results for machine learning problems. In particular, [14] showed that the classic algorithm of Viterbi that computes the most likely path in a Hidden Markov Model which results in a given sequence of observations is essentially optimal assuming certain complexity theoretical hypotheses. Another work [13] showed conditional hardness results for multiple empirical risk minimization problems such as kernel support vector machines, kernel ridge regression, and training the final layer of a neural network. Furthermore, there are many works that show hardness for problems that are used in machine learning literature. This includes conditional lower bounds for kernel low-rank approximation [68], closest pair and its variants [9, 75, 88, 24, 29, 28], maximum inner product [6, 22, 23], earth mover’s distance (a.k.a. Wasserstein metric) [74], dynamic time warping distance [3, 17].

Further contexts in which lossless compressions are used for ML applications, where the primary focus is on other aspects than increasing algorithmic performance, include compressing and accelerating models for deployment on resource-constrained devices (see [44, 26]; e.g., lossless compressions are used to compress weights after a quantization step) or implementing the principle of minimum description length for feature learning (see [70]).

Outside of ML, the idea of improving efficiency by operating on (losslessly) compressed data is well-established in databases [1, 25, 87, 46], and is gaining traction also in bioinformatics [84].

2 Preliminaries

As described in Section 1, a grammar compression of a sequence (or a vector) is an SLP that produces the sequence. In our proofs we will use the following simple observation about SLPs.

Proposition 2.1. *Let \mathcal{G} be an SLP with start symbol S that generates a sequence s . For any $\alpha \in \mathbb{N}$, we can compute an SLP \mathcal{G}' that generates the α -fold repetition of s , i.e.,*

$$s^\alpha = \underbrace{s s \cdots s}_{\alpha \text{ times}}$$

and has size $|\mathcal{G}| + O(\log \alpha)$ in time $O(|\mathcal{G}'|)$.

Proof sketch. Using $O(\log \alpha)$ repeated squaring rules $S_i \rightarrow S_{i-1}S_{i-1}$ and $S_0 \rightarrow S$, we obtain non-terminals $S_0, \dots, S_{\lceil \log_2 \alpha \rceil}$ generating s^{2^i} for $i \in \{0, \dots, \lceil \log_2 \alpha \rceil\}$. It is straightforward to combine these non-terminals, according to the binary representation of α , to generate s^α using only $O(\log \alpha)$ additional non-terminals. \square

Using this property, we can often compress sequences much more efficiently than run-length encoding alone could: E.g., repetitive patterns like $(010011)^n$ can be encoded using only $\Theta(\log n)$ bits instead of $\Theta(n)$. Indeed, our constructions crucially exploit a repeated application of this property to compress hard instances to very small sizes.

The Complexity Assumptions As discussed in Section 1, the impossibility results in fine-grained complexity are based on certain popular conjectures. One of the central ones concerns the 3SUM problem, which has a few equivalent formulations (up to linear time transformations [31]); we will mostly use the following⁵.

Definition 2.2 (The 3SUM Problem). *Given three sets A, B, C of m integers in $\{1, \dots, U\}$, decide if there is a triple $a \in A, b \in B, c \in C$ such that $a + b = c$.*

It is a simple exercise (that is often given in interviews) to come up with an $O(m^2)$ time algorithm, and despite decades of efforts, only mildly subquadratic $O(m^2/\log^c m)$ bounds for a small $0 < c < 3$ are known [15, 51, 42, 37, 19].

The 3SUM Conjecture. No algorithm can solve the 3SUM problem in $O(m^{2-\varepsilon})$ time, where $\varepsilon > 0$.

A few remarks about this conjecture. First, a folklore trick of taking all numbers modulo a random large prime shows that the problem for arbitrary universe U is equivalent to the case where $U = O(m^3 \log^2 m)$ (see Lemma B.1 in [5] for a proof). Therefore, we will assume this bound on U . When U becomes too small, the problem becomes easy due to an $O(m + U \log U)$ algorithm using Fast Fourier Transform [27]. However, the problem is conjectured to be hard even when $U = \Theta(m^2)$ and this is referred to as the Strong 3SUM Conjecture [10, 2]. This stronger assumption allows us to strengthen our lower bounds by reducing N . Second, the hardness of the more general kSUM problem is also used as a complexity assumption [4, 2]. In the formulation that we will use, we are given k sets A_1, \dots, A_k of m integers in $\{1, \dots, U\}$ where $U = \Theta(m^{\lfloor k/2 \rfloor})$ and are asked to decide if there are k numbers, one from each set, such that $a_1 + \dots + a_{k-1} = a_k$. The Strong kSUM conjecture states that cannot be done in $O(m^{\lfloor k/2 \rfloor - \varepsilon})$ time, for any $\varepsilon > 0$. We will use this assumption to prove lower bounds even when n is much smaller than N . Third, 3SUM and the other hardness assumptions in fine-grained complexity are conjectured to be true even against randomized algorithms that succeed with high probability. This is important since some of our reductions are randomized.

3 Vector Inner Product

In this section we present the proof of Theorem 1.1 by giving a reduction from 3SUM to the inner product of compressed vectors. A slightly weaker conditional lower bound of $\tilde{\Omega}(N^{1/2})$ for vectors compressible to $n = N^{1/4}$ can be extracted from the proof of Theorem 5.11 in [2]. We use similar tricks, but a different and more optimized construction to obtain a stronger conditional lower bound of $\tilde{\Omega}(N^{2/3})$ already on less compressible vectors with $n = N^{1/3}$. Technically, the novelty is that we manage to encode two sets (A and B) into one vector of length mU rather than m^2U . This new construction is crucial for the extensions we show – we do not see how to prove any lower bound for matrix-vector inner product without building on this new construction.

Proof. Given an instance of 3SUM, that is, three sets A, B, C of m integers in $\{1, \dots, U\}$, we show how to construct vectors $v'_{A+B}, v'_C \in \{0, 1\}^N$ with $N = 2mU \log^2 m$ such that: (1) $v'_{A+B} \cdot v'_C \geq 1$ if and only there $a \in A, b \in B, c \in C$ with $a + b = c$, (2) both vectors have a compression of size $O(m \log U)$, and (3) the construction time is $O(m \log U)$.

This reduction suffices for proving Theorem 1.1 due to the following calculations. Since (as discussed in Section 2) we can assume that $U = \Theta(m^3 \log^2 m)$, the reduction produces two vectors of dimension $N = \Theta((m \log m)^4)$ and compressed size $n = \Theta(N^{1/4}) = \Theta(m \log m)$, such that the inner product reveals the answer to the 3SUM instance. Therefore, an $O(n^{2-\varepsilon})$ -time algorithm would solve the 3SUM instance in time $O(m^{2-\varepsilon} \text{polylog} m)$, refuting the 3SUM conjecture. Note that the $O(m \log U)$ time for the reduction itself is negligible. Moreover, if we assume the Strong 3SUM conjecture, we can start with 3SUM instances where $U = O(m^2)$ and get vectors of dimension $N = O((m \log m)^3)$, ruling out inner product algorithms with time $O(N^{\frac{2}{3}-\varepsilon})$.

We now present the construction of the vectors. As a first step, we observe that for any set $X \subseteq \{1, \dots, U\}$, we can compress its characteristic vector $v_X \in \{0, 1\}^U$, i.e., $v_X[i] = 1$ iff $i \in X$, to size $O(|X| \log U)$ as follows. We write $X = \{x_1, \dots, x_{|X|}\}$ with $x_1 < x_2 < \dots < x_{|X|}$ and observe that

$$v_X := 0^{x_1-1} 1 0^{x_2-x_1-1} 1 \dots 1 0^{x_{|X|}-x_{|X|-1}-1} 1 0^{U-x_{|X|}},$$

⁵For example, instead of $a + b = c$ or $a + b + c = 0$ we may be given a target t and ask for $a + b + c = t$.

where each 0-block has length at most U and can thus be encoded using $O(\log U)$ symbols using Proposition 2.1. In total, we obtain a compression of size $O(|X| \log U)$, which can be computed in time $O(|X| \log U)$ as well.

Let $A = \{a_1, \dots, a_m\}$. The central idea is to let v'_{A+B}, v'_C consist of m blocks of size $2U$, where the i -th block in v'_{A+B} gives the characteristic vector of the set $a_i + B = \{a_i + b \mid b \in B\} \subseteq \{1, \dots, 2U\}$ and the i -th block in v'_C gives the characteristic vector of $C \subseteq \{1, \dots, 2U\}$. Formally, we define

$$\begin{aligned} v'_{A+B} &:= \underbrace{0^{a_1} v_B 0^{U-a_1}}_{v'_{a_1+B}} \quad \underbrace{0^{a_2} v_B 0^{U-a_2}}_{v'_{a_2+B}} \quad \dots \quad \underbrace{0^{a_m} v_B 0^{U-a_m}}_{v'_{a_m+B}} \quad 0^{N-2mU}, \\ v'_C &:= \underbrace{v_C 0^U}_{v'_C} \quad \underbrace{v_C 0^U}_{v'_C} \quad \dots \quad \underbrace{v_C 0^U}_{v'_C} \quad 0^{N-2mU}. \end{aligned}$$

(Here, the last block of 0s only serves to get the desired dimension of N for technical reasons.) We observe that v'_{A+B} and v'_C have an inner product of at least 1 if and only if the characteristic vectors of some block i have a common 1-entry. Thus, consider any block i : We have $v'_{a_i+B}[k] = (v_C 0^U)[k] = 1$ if and only if $k - a_i \in B$ and $k \in C$, i.e., $a_i \in A, k - a_i \in B, k \in C$ is a solution of the given 3SUM instance. Thus, $v'_{A+B} \cdot v'_C \geq 1$ if and only if there is some $a \in A, b \in B, c \in C$ such that $a + b = c$, as desired.

It remains to show that a $O(m \log U)$ -sized compression of v'_{A+B} and v'_C can be computed in time $O(m \log U)$: Clearly, since $v_C 0^U$ can be compressed to size $O(m \log U)$ efficiently, we can also compress its m -fold repetition using $O(\log m)$ additional symbols using Proposition 2.1, as well 0^{N-2mU} which takes $O(\log N) = O(\log mU)$ additional symbols; thus, v'_C can be compressed to size $O(m \log mU)$ in time $O(m \log U)$. Furthermore, recall that we can compress v_B to size $O(m \log U)$ efficiently, and let \mathcal{G} be an SLP with starting symbol S_B generating v_B . Thus, to compress v_{a_i+B} , we only need to compress the surrounding blocks $0^{a_i}, 0^{U-a_i}$ and can reuse S_B to generate v_B . Since we can encode the 0-blocks using $O(\log U)$ additional non-terminals, this yields a compression size of $O(\log U)$ per block i . Together with a $O(\log mU)$ encoding of the trailing block 0^{N-2mU} , this yields again a compression of size $O(m \log U)$. Note that reusing a non-terminal generating v_B was instrumental in giving a compression of size $O(m \log m)$ rather than $O(m^2 \log m)$ and that this compression can indeed be computed in time $O(m \log U)$ and concludes the claim. \square

With more work, the above arguments can be generalized to reduce a k SUM instance with k sets of m integers in $\{1, \dots, U\}$ to vectors of dimension $N = \Theta(m^{k-2}U)$ and compressed size $O(m \log U)$ in time $O(m \log U)$. The main idea is to encode a shift of A_{k-1} for each tuple of A_1, \dots, A_{k-2} in one vector, and encode m^{k-2} repetitions of the remaining set A_k in the other vector. Under the Strong k SUM conjecture, this yields a conditional lower bound for inner product of $\tilde{\Omega}(N^{1/3})$ where $n = O((N/U)^{1/(k-2)} \log N)$. Thus, for any fixed $\varepsilon > 0$, let k be a sufficiently large constant integer such that $1/(k-2) < \varepsilon$, then the Strong k SUM conjecture implies that N -dimensional vectors with compressed size $n = O(N^\varepsilon)$ cannot have an $O(N^{1/3-\delta})$ algorithm for any constant $\delta > 0$. We formally prove the result in the appendix.

4 Matrix-Vector Multiplication

In this section we sketch how to prove Theorem 1.2 by giving a reduction from 3SUM to Matrix-Vector multiplication on compressed data. We give a complete formal proof in the appendix.

A helpful tool for this task is the following self-reduction for 3SUM, which follows from combining a known self-reduction [62] with a standard universe-size reduction technique on each produced instance [15, 72, 5].

Lemma 4.1 (Self-Reduction for 3SUM). *Let $1 \leq s = s(m) \leq m$ and $\epsilon > 0$ be arbitrary. If there is an algorithm that, given a target t and $L = O((m/s)^2)$ sets A_ℓ, B_ℓ, C_ℓ of s integers in $\{1, \dots, O(s^3 \log^2 s)\}$, determines for all $1 \leq \ell \leq L$ whether there are $a \in A_\ell, b \in B_\ell, c \in C_\ell$ with $a + b + c = t$ in total time $O(m^{2-\epsilon})$, then the 3SUM conjecture is false.*

Given the above self-reduction, the basic idea is as follows. We construct a matrix M whose rows are indexed by the instance $1 \leq \ell \leq L$ and the aim is to construct the row M_ℓ and the vector v such that $M_\ell \cdot v \geq 1$ if and only if the instance A_ℓ, B_ℓ, C_ℓ contains a solution, i.e., $a \in A_\ell, b \in B_\ell, c \in C_\ell$ with $a + b + c = t$. Unfortunately, we cannot apply our Vector Inner Product construction directly: this would encode the set $A_\ell + B_\ell = \{a + b \mid a \in A_\ell, b \in B_\ell\}$ into the row M_ℓ and the set C_ℓ into the vector v – however, in the matrix

product Mv , each row M_ℓ is multiplied with a *fixed* vector v , while the C_ℓ 's differ for each ℓ . We overcome this issue by adapting our construction to encode the set $A_\ell + B_\ell + C_\ell = \{a + b + c \mid a \in A_\ell, b \in B_\ell, c \in C_\ell\}$ into the row M_ℓ , and only the common target t into v . As all instances use the same target t , this is indeed possible.

Specifically, using the ideas of Theorem 1.1, which produces a $2sU$ -dimensional vectors encoding the sets $A + B$ and C , both having compressed size $O(s \log U)$, we show how to produce $3s^2U$ -dimensional vectors M_ℓ and v encoding the sets $A_\ell + B_\ell + C_\ell$ and $\{t\}$, both having compressed size $O(s \log U)$. This yields a $(L \times 3s^2U)$ -dimensional matrix M and $3s^2U$ -dimensional vector v . There is a choice $s = \Theta(m^{2/7})$ that leads to a quadratic matrix M with dimension $N = \Theta(m^{10/7})$ (as it has $O((m/s)^2) = O(m^{10/7})$ rows and $O(s^2U) = O(s^5) = O(m^{10/7})$ columns), with row compressions of size $n = \Theta(s \log s) = \Theta(m^{2/7} \log m) \approx N^{1/5}$. Thus, any $O(Nn^{2-\epsilon})$ algorithm computing $M \cdot v$ would solve 3SUM instances in time $\tilde{O}(m^{2-2\epsilon/7})$, refuting the 3SUM conjecture.

5 Matrix-Matrix Multiplication

In this section, we consider the problem of computing the matrix product C of two $N \times N$ matrices A, B . We consider the following representations of the input matrices:

- **Convenient compression:** A is compressed row-wise, B is compressed column-wise. This representation allows us to compute any single entry $C_{i,j}$ by running an inner product algorithm on the compressed row A_i and the compressed column B_j . The size of the input is $O(N\bar{n}_{\text{in}})$, where \bar{n}_{in} is the maximum compressed size of the rows A_i and columns B_j .
- **Strong compression:** For any matrix M , we define *strong compression* as a grammar compression of M or M^T when viewed as n^2 -dimensional vector, whichever is shortest. When both A, B are given as strong compression, the resulting representation can have a much smaller size (it can be $o(N)$), but to compute a single entry $C_{i,j}$, we first might need to obtain a representation of the row A_i and the column B_j .

Similarly, we have several options for representing C :

- **Row-wise compression of C .** This compression is particularly useful if we aim to compute repeated matrix products $A_1(A_2(\dots(A_k B)))$. The output size is $O(N\bar{n}_{\text{out}})$, where \bar{n}_{out} is the maximum compressed size over all rows of C .
- **Column-wise compression of C .** This compression is particularly useful if we aim to compute repeated matrix products $((AB_1)B_2) \dots B_k$. The output size is $O(N\bar{n}_{\text{out}})$, where \bar{n}_{out} is the maximum compressed size over all columns of C .
- **Strong compression of C .** This compression has the smallest output size, which can be even $o(N)$.

We show the following result:

Theorem 5.1. *For infinitely many N , there are $N \times N$ matrices A, B with*

1. *convenient compression of size $O(N \log N)$ (already under RLE), and*
2. *strong compression of size $O(\log^2 N)$, such that*
3. *the matrix product $C = AB$ has size $\Omega(N^2/\log^2 N)$ in any grammar-compression (row-wise, column-wise, or strong).*

As a consequence, there can be no $o(N^2/\log^2 N)$ algorithm for matrix-matrix multiplication (for any of our discussed representations), since already writing the output requires time $\Omega(N^2/\log^2 N)$.

The rough proof strategy is to construct an instance $C = AB$ such that C and C^T , when viewed as N^2 -dimensional vectors, contain all substrings of length $2 \log_2 n$. By the following standard lemma, such a string has no grammar compression of size $o(N^2/\log N)$.

Lemma 5.2 (see, e.g., [20, Lemma 3]). *Let $\ell \in \mathbb{N}$. If a string x is generated by a grammar of size n , then x contains at most $n\ell$ distinct substrings of length ℓ .*

Proof of Theorem 5.1. Let $\ell \in \mathbb{N}$. We first define the matrices A', B' where A' is a $(2^\ell \times 2\ell)$ matrix with rows indexed by strings $x \in \{0, 1\}^\ell$ in lexicographic order, and B' is a $(2\ell \times 2^\ell(2\ell))$ matrix with columns indexed by $(y, k) \in \{0, 1\}^\ell \times \{1, \dots, 2\ell\}$ in lexicographic order. For arbitrary $z \in \{0, 1\}^\ell$, let $\text{diag}(z)$ denote the $\ell \times \ell$ diagonal matrix with z on the diagonal. We define

$$A'_x := (x \mid 1^\ell), \quad B'_{(y,1), \dots, (y,2\ell)} := \left(\begin{array}{c|c} \text{diag}(1^\ell) & 0 \\ \hline 0 & \text{diag}(y) \end{array} \right).$$

Let $C' = A'B'$ be the $(2^\ell \times 2^\ell(2\ell))$ product matrix of A' and B' , with rows and columns indexed by $\{0, 1\}^\ell$ and $\{0, 1\}^\ell \times \{1, \dots, 2\ell\}$, respectively. Observe that by definition, $(C_{x,(y,1)}, \dots, C_{x,(y,2\ell)}) = (x \mid y)$ for any $x, y \in \{0, 1\}^\ell$. In particular, when we view C' as a $2^{2\ell}(2\ell)$ -length string, it contains all strings in $\{0, 1\}^{2\ell}$ as substrings, thus by Lemma 5.2, any row-wise compression is of size at least $2^{2\ell}/(2\ell)$.

It is straightforward to make these matrices quadratic with dimension $N = \Theta(\ell 2^\ell)$ (by introducing all-0 columns) and to ensure that also column-wise compression has size $\Omega(2^{2\ell}/\ell) = \Omega(N^2/\log^2 N)$ (using transposed constructions to A' and B'). Finally, we can compress each row of A' and column of B' trivially to length $O(\ell) = O(\log N)$ (already using RLE). In the appendix, we also argue how to grammar-compress the concatenation of the columns of A' and the rows of B' to size $O(\ell^2) = O(\log^2 N)$, which concludes the desired bound on the strong compression. \square

Broader Impact

The broader impact of our work is to inform algorithm design for compressed linear algebra, which can lead to faster algorithms for a variety of tasks on large data sets. The ethical consequences depend on the specific application. We do not see any inherently new concerns raised by our results, beyond those that follow generally from faster algorithms and an increased ability to process data.

References

- [1] Daniel Abadi, Samuel Madden, and Miguel Ferreira. Integrating compression and execution in column-oriented database systems. In *Proceedings of the 2006 ACM SIGMOD international conference on Management of data*, pages 671–682, 2006.
- [2] Amir Abboud, Arturs Backurs, Karl Bringmann, and Marvin Künnemann. Fine-grained complexity of analyzing compressed data: Quantifying improvements over decompress-and-solve. In *58th IEEE Annual Symposium on Foundations of Computer Science, FOCS 2017, Berkeley, CA, USA, October 15-17, 2017*, pages 192–203, 2017.
- [3] Amir Abboud, Arturs Backurs, and Virginia Vassilevska Williams. Tight hardness results for lcs and other sequence similarity measures. In *2015 IEEE 56th Annual Symposium on Foundations of Computer Science*, pages 59–78. IEEE, 2015.
- [4] Amir Abboud and Kevin Lewi. Exact weight subgraphs and the k-sum conjecture. In *International Colloquium on Automata, Languages, and Programming*, pages 1–12. Springer, 2013.
- [5] Amir Abboud, Kevin Lewi, and Ryan Williams. Losing weight by gaining edges. In *European Symposium on Algorithms*, pages 1–12. Springer, 2014.
- [6] Amir Abboud, Aviad Rubinfeld, and Ryan Williams. Distributed pcp theorems for hardness of approximation in p. In *2017 IEEE 58th Annual Symposium on Foundations of Computer Science (FOCS)*, pages 25–36. IEEE, 2017.
- [7] Amir Abboud and Virginia Vassilevska Williams. Popular conjectures imply strong lower bounds for dynamic problems. In *2014 IEEE 55th Annual Symposium on Foundations of Computer Science*, pages 434–443. IEEE, 2014.

- [8] Amir Abboud, Virginia Vassilevska Williams, and Oren Weimann. Consequences of faster alignment of sequences. In *International Colloquium on Automata, Languages, and Programming*, pages 39–51. Springer, 2014.
- [9] Josh Alman and Ryan Williams. Probabilistic polynomials and hamming nearest neighbors. In *2015 IEEE 56th Annual Symposium on Foundations of Computer Science*, pages 136–150. IEEE, 2015.
- [10] A. Amir, T. M. Chan, M. Lewenstein, and N. Lewenstein. On hardness of jumbled indexing. In *Proc. ICALP*, volume 8572, pages 114–125, 2014.
- [11] Amihood Amir, Gary Benson, and Martin Farach. Let sleeping files lie: Pattern matching in z-compressed files. *Journal of Computer and System Sciences*, 52(2):299–307, 1996.
- [12] Sanjeev Arora and Boaz Barak. *Computational complexity: a modern approach*. Cambridge University Press, 2009.
- [13] Arturs Backurs, Piotr Indyk, and Ludwig Schmidt. On the fine-grained complexity of empirical risk minimization: Kernel methods and neural networks. In *Advances in Neural Information Processing Systems*, pages 4308–4318, 2017.
- [14] Arturs Backurs and Christos Tzamos. Improving viterbi is hard: Better runtimes imply faster clique algorithms. In *Proceedings of the 34th International Conference on Machine Learning-Volume 70*, pages 311–321. JMLR. org, 2017.
- [15] Ilya Baran, Erik D Demaine, and Mihai Patrascu. Subquadratic algorithms for 3sum. In *Workshop on Algorithms and Data Structures*, pages 409–421. Springer, 2005.
- [16] Ella Bingham and Heikki Mannila. Random projection in dimensionality reduction: applications to image and text data. In *Proceedings of the seventh ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 245–250, 2001.
- [17] Karl Bringmann and Marvin Künnemann. Quadratic conditional lower bounds for string problems and dynamic time warping. In *2015 IEEE 56th Annual Symposium on Foundations of Computer Science*, pages 79–97. IEEE, 2015.
- [18] Patrick Cégielski, Irene Guessarian, Yury Lifshits, and Yuri Matiyasevich. Window subsequence problems for compressed texts. In *Proc. 1st International Computer Science Symposium in Russia (CSR'06)*, pages 127–136. Springer, 2006.
- [19] Timothy M Chan. More logarithmic-factor speedups for 3sum,(median,+)-convolution, and some geometric 3sum-hard problems. *ACM Transactions on Algorithms (TALG)*, 16(1):1–23, 2019.
- [20] Moses Charikar, Eric Lehman, Ding Liu, Rina Panigrahy, Manoj Prabhakaran, Amit Sahai, and Abhi Shelat. The smallest grammar problem. *STOC'02 and IEEE Transactions on Information Theory*, 51(7):2554–2576, 2005.
- [21] Kuan-Yu Chen, Ping-Hui Hsu, and Kun-Mao Chao. Approximate matching for run-length encoded strings is 3sum-hard. In *Annual Symposium on Combinatorial Pattern Matching*, pages 168–179. Springer, 2009.
- [22] Lijie Chen. On the hardness of approximate and exact (bichromatic) maximum inner product. *arXiv preprint arXiv:1802.02325*, 2018.
- [23] Lijie Chen, Shafi Goldwasser, Kaifeng Lyu, Guy N Rothblum, and Aviad Rubinfeld. Fine-grained complexity meets $\text{ip} = \text{pspace}$. In *Proceedings of the Thirtieth Annual ACM-SIAM Symposium on Discrete Algorithms*, pages 1–20. SIAM, 2019.
- [24] Lijie Chen and Ryan Williams. An equivalence class for orthogonal vectors. In *Proceedings of the Thirtieth Annual ACM-SIAM Symposium on Discrete Algorithms*, pages 21–40. SIAM, 2019.

- [25] Zhiyuan Chen, Johannes Gehrke, and Flip Korn. Query optimization in compressed database systems. In *Proceedings of the 2001 ACM SIGMOD international conference on Management of data*, pages 271–282, 2001.
- [26] Tejalal Choudhary, Vipul Mishra, Anurag Goswami, and Jagannathan Sarangapani. A comprehensive survey on model compression and acceleration. *Artif. Intell. Rev.*, 53(7):5113–5155, 2020.
- [27] Thomas H Cormen, Charles E Leiserson, Ronald L Rivest, and Clifford Stein. *Introduction to algorithms*. MIT press, 2009.
- [28] Karthik CS and Pasin Manurangsi. On closest pair in euclidean metric: Monochromatic is as hard as bichromatic. In *10th Innovations in Theoretical Computer Science Conference (ITCS 2019)*. Schloss Dagstuhl-Leibniz-Zentrum fuer Informatik, 2018.
- [29] Roe David and Bundit Laekhanukit. On the complexity of closest pair via polar-pair of point-sets. *SIAM Journal on Discrete Mathematics*, 33(1):509–527, 2019.
- [30] Dheeru Dua and Casey Graff. UCI machine learning repository, 2017.
- [31] Bartłomiej Dudek, Pawel Gawrychowski, and Tatiana Starikovskaya. All non-trivial variants of 3-ldt are equivalent. *CoRR*, abs/2001.01289, 2020.
- [32] Ahmed Elgohary, Matthias Boehm, Peter J. Haas, Frederick R. Reiss, and Berthold Reinwald. Compressed linear algebra for large-scale machine learning. *Proc. VLDB Endow.*, 9(12):960–971, 2016.
- [33] Ahmed Elgohary, Matthias Boehm, Peter J. Haas, Frederick R. Reiss, and Berthold Reinwald. Scaling machine learning via compressed linear algebra. *SIGMOD Rec.*, 46(1):42–49, 2017.
- [34] Ahmed Elgohary, Matthias Boehm, Peter J. Haas, Frederick R. Reiss, and Berthold Reinwald. Compressed linear algebra for large-scale machine learning. *VLDB J.*, 27(5):719–744, 2018.
- [35] Ahmed Elgohary, Matthias Boehm, Peter J. Haas, Frederick R. Reiss, and Berthold Reinwald. Compressed linear algebra for declarative large-scale machine learning. *Commun. ACM*, 62(5):83–91, 2019.
- [36] Martin Farach and Mikkel Thorup. String matching in Lempel-Ziv compressed strings. In *Proc. 27th Annual ACM Symposium on Theory of Computing (STOC’95)*, pages 703–712. ACM, 1995.
- [37] Ari Freund. Improved subquadratic 3sum. *Algorithmica*, 77(2):440–458, 2017.
- [38] Anka Gajentaan and Mark H. Overmars. On a class of $o(n^2)$ problems in computational geometry. *Computational Geometry*, 5(3):165–185, 1995.
- [39] Leszek Gąsieniec, Marek Karpinski, Wojciech Plandowski, and Wojciech Rytter. Efficient algorithms for Lempel-Ziv encoding. *Proc. 5th Scandinavian Workshop on Algorithm Theory (SWAT’96)*, pages 392–403, 1996.
- [40] Paweł Gawrychowski. Pattern matching in Lempel-Ziv compressed strings: fast, simple, and deterministic. In *Proc. 19th Annual European Symposium on Algorithms (ESA’11)*, pages 421–432. Springer, 2011.
- [41] Raffaele Giancarlo, Davide Scaturro, and Filippo Utró. Textual data compression in computational biology: a synopsis. *Bioinformatics*, 25(13):1575–1586, 2009.
- [42] Omer Gold and Micha Sharir. Improved bounds for 3SUM, K -SUM, and linear degeneracy. *CoRR*, abs/1512.05279, 2015.
- [43] Isaac Goldstein, Tsvi Kopelowitz, Moshe Lewenstein, and Ely Porat. How hard is it to find (honest) witnesses? *arXiv preprint arXiv:1706.05815*, 2017.

- [44] Song Han, Huizi Mao, and William J. Dally. Deep compression: Compressing deep neural network with pruning, trained quantization and huffman coding. In Yoshua Bengio and Yann LeCun, editors, *Proc. 4th International Conference on Learning Representations, ICLR 2016*, 2016.
- [45] Danny Hermelin, Gad M Landau, Shir Landau, and Oren Weimann. Unified compression-based acceleration of edit-distance computation. *Algorithmica*, 65(2):339–353, 2013.
- [46] Balakrishna R Iyer and David Wilhite. Data compression support in databases. In *VLDB*, volume 94, pages 695–704, 1994.
- [47] Klaus Jansen, Felix Land, and Kati Land. Bounding the running time of algorithms for scheduling and packing problems. *SIAM J. Discret. Math.*, 30(1):343–366, 2016.
- [48] Artur Jeż. Approximation of grammar-based compression via recompression. *Theoretical Computer Science*, 592:115–134, 2015.
- [49] Artur Jeż. Faster fully compressed pattern matching by recompression. *ACM Transactions on Algorithms (TALG)*, 11(3):20, 2015.
- [50] Artur Jeż. A really simple approximation of smallest grammar. *Theoretical Computer Science*, 616:141–150, 2016.
- [51] Allan Grønlund Jørgensen and Seth Pettie. Threesomes, degenerates, and love triangles. In *Proc. of the 55th Annual IEEE Symposium on Foundations of Computer Science (FOCS)*, pages 621–630, 2014.
- [52] Vasileios Karakasis, Theodoros Gkountouvas, Kornilios Kourtis, Georgios Goumas, and Nectarios Koziris. An extended compression format for the optimization of sparse matrix-vector multiplication. *IEEE Transactions on Parallel and Distributed Systems*, 24(10):1930–1940, 2012.
- [53] Marek Karpinski, Wojciech Rytter, and Ayumi Shinohara. Pattern-matching for strings with short descriptions. In *Proc. Annual Symposium on Combinatorial Pattern Matching (CPM’95)*, pages 205–214. Springer, 1995.
- [54] John C. Kieffer and En-Hui Yang. Grammar-based codes: A new class of universal lossless source codes. *IEEE Trans. Inf. Theory*, 46(3):737–754, 2000.
- [55] Tsvi Kopelowitz, Seth Pettie, and Ely Porat. Higher lower bounds from the 3sum conjecture. In *Proceedings of the twenty-seventh annual ACM-SIAM symposium on Discrete algorithms*, pages 1272–1287. SIAM, 2016.
- [56] Kornilios Kourtis, Georgios Goumas, and Nectarios Koziris. Optimizing sparse matrix-vector multiplication using index and value compression. In *Proceedings of the 5th conference on Computing frontiers*, pages 87–96, 2008.
- [57] N Jesper Larsson. *Structures of string matching and data compression*. Department of Computer Science, Lund University, 1999.
- [58] Abraham Lempel and Jacob Ziv. On the complexity of finite sequences. *IEEE Transactions on Information Theory*, 22(1):75–81, 1976.
- [59] Fengan Li, Lingjiao Chen, Arun Kumar, Jeffrey F Naughton, Jignesh M Patel, and Xi Wu. When lempel-ziv-welch meets machine learning: A case study of accelerating machine learning using coding. *arXiv preprint arXiv:1702.06943*, 2017.
- [60] Yury Lifshits. Processing compressed texts: A tractability border. In Bin Ma and Kaizhong Zhang, editors, *Proc. 18th Annual Symposium on Combinatorial Pattern Matching (CPM 2007)*, volume 4580 of *Lecture Notes in Computer Science*, pages 228–240. Springer, 2007.
- [61] Yury Lifshits, Shay Mozes, Oren Weimann, and Michal Ziv-Ukelson. Speeding up hmm decoding and training by exploiting sequence repetitions. *Algorithmica*, 54(3):379–399, 2009.

- [62] Andrea Lincoln, Virginia Vassilevska Williams, Joshua R. Wang, and R. Ryan Williams. Deterministic time-space trade-offs for k-sum. In *International Colloquium on Automata, Languages, and Programming*, pages 58:1–58:14, 2016.
- [63] Qi Liu, Yu Yang, Chun Chen, Jiajun Bu, Yin Zhang, and Xiuzi Ye. RNACompress: Grammar-based compression and informational complexity measurement of RNA secondary structure. *BMC bioinformatics*, 9(1):176, 2008.
- [64] Markus Lohrey. Algorithmics on slp-compressed strings: A survey. *Groups Complexity Cryptology*, 4(2):241–299, 2012.
- [65] Alaa Maalouf, Ibrahim Jubran, and Dan Feldman. Fast and accurate least-mean-squares solvers. In *Advances in Neural Information Processing Systems 32: Annual Conference on Neural Information Processing Systems 2019, NeurIPS 2019, 8-14 December 2019, Vancouver, BC, Canada*, pages 8305–8316, 2019.
- [66] Sebastian Maneth and Fabian Peternek. A survey on methods and systems for graph compression. *arXiv preprint arXiv:1504.00616*, 2015.
- [67] Sebastian Maneth and Fabian Peternek. Grammar-based graph compression. *Information Systems*, 76:19–45, 2018.
- [68] Cameron Musco and David Woodruff. Is input sparsity time possible for kernel low-rank approximation? In *Advances in Neural Information Processing Systems*, pages 4435–4445, 2017.
- [69] Craig G Nevill-Manning and Ian H Witten. Compression and explanation using hierarchical grammars. *The Computer Journal*, 40(2 and 3):103–116, 1997.
- [70] Hristo S. Paskov, Robert West, John C. Mitchell, and Trevor J. Hastie. Compressive feature learning. In Christopher J. C. Burges, Léon Bottou, Zoubin Ghahramani, and Kilian Q. Weinberger, editors, *Advances in Neural Information Processing Systems*, pages 2931–2939, 2013.
- [71] Wojciech Plandowski. Testing equivalence of morphisms on context-free languages. *Proc. 2nd Annual European Symposium on Algorithms (ESA '94)*, pages 460–470, 1994.
- [72] Mihai Pătraşcu. Towards polynomial lower bounds for dynamic problems. In *Proc. of the 42nd Annual ACM Symposium on Theory Of Computing (STOC)*, pages 603–610, 2010.
- [73] Roberto Radicioni and Alberto Bertoni. Grammatical compression: compressed equivalence and other problems. *Discrete Mathematics and Theoretical Computer Science*, 12(4):109, 2010.
- [74] Dhruv Rohatgi. Conditional hardness of earth mover distance. *arXiv preprint arXiv:1909.11068*, 2019.
- [75] Aviad Rubinfeld. Hardness of approximate nearest neighbor search. In *Proceedings of the 50th Annual ACM SIGACT Symposium on Theory of Computing*, pages 1260–1268, 2018.
- [76] Wojciech Rytter. Application of Lempel–Ziv factorization to the approximation of grammar-based compression. *Theoretical Computer Science*, 302(1-3):211–222, 2003.
- [77] Wojciech Rytter. Grammar compression, lz-encodings, and string algorithms with implicit input. In *Proc. 31st International Colloquium on Automata, Languages, and Programming (ICALP'04)*, pages 15–27. Springer, 2004.
- [78] Yousef Saad. *Iterative methods for sparse linear systems*, volume 82. siam, 2003.
- [79] Hiroshi Sakamoto. A fully linear-time approximation algorithm for grammar-based compression. *Journal of Discrete Algorithms*, 3(2):416–430, 2005.
- [80] Hiroshi Sakamoto. Grammar compression: Grammatical inference by compression and its application to real data. In *ICGI*, pages 3–20, 2014.

- [81] D Sculley and Carla E Brodley. Compression and machine learning: A new perspective on feature space vectors. In *Proc. Data Compression Conference (DCC'06)*, pages 332–341, 2006.
- [82] Yusuxke Shibata, Takuya Kida, Shuichi Fukamachi, Masayuki Takeda, Ayumi Shinohara, Takeshi Shinohara, and Setsuo Arikawa. Byte pair encoding: A text compression scheme that accelerates pattern matching. Technical report, Technical Report DOI-TR-161, Department of Informatics, Kyushu University, 1999.
- [83] Yasuo Tabei, Hiroto Saigo, Yoshihiro Yamanishi, and Simon J Puglisi. Scalable partial least squares regression on grammar-compressed data matrices. In *Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, pages 1875–1884, 2016.
- [84] Kedar Tatwawadi, Mikel Hernaez, Idoia Ochoa, and Tsachy Weissman. Gtrac: fast retrieval from compressed collections of genomic variants. *Bioinformatics*, 32(17):i479–i486, 2016.
- [85] Virginia Vassilevska and Ryan Williams. Finding, minimizing, and counting weighted subgraphs. In *Proceedings of the forty-first annual ACM symposium on Theory of computing*, pages 455–464, 2009.
- [86] Terry A. Welch. A technique for high-performance data compression. *Computer*, 6(17):8–19, 1984.
- [87] Till Westmann, Donald Kossmann, Sven Helmer, and Guido Moerkotte. The implementation and performance of compressed databases. *ACM Sigmod Record*, 29(3):55–67, 2000.
- [88] Ryan Williams. On the difference between closest, furthest, and orthogonal pairs: Nearly-linear vs barely-subquadratic complexity. In *Proceedings of the Twenty-Ninth Annual ACM-SIAM Symposium on Discrete Algorithms*, pages 1207–1215. SIAM, 2018.
- [89] Virginia Vassilevska Williams. On some fine-grained questions in algorithms and complexity. In *Proceedings of the ICM*, volume 3, pages 3431–3472. World Scientific, 2018.
- [90] Ian H Witten, Alistair Moffat, and Timothy C Bell. *Managing gigabytes: compressing and indexing documents and images*. Morgan Kaufmann, 1999.
- [91] Jacob Ziv and Abraham Lempel. A universal algorithm for sequential data compression. *IEEE Transactions on Information Theory*, 23(3):337–343, 1977.

A Further Preliminaries

For a sequence of vectors v_1, \dots, v_ℓ , we let $v_1 v_2 \dots v_\ell = v_1 \circ v_2 \circ \dots \circ v_\ell = \bigcirc_{i=1}^{\ell} v_i$ denote their concatenation.

By the following observation, when proving a lower bound for a compression of size $\Theta(N^\gamma)$, the main task is to prove the upper bound $n = O(N^\gamma)$; the lower bound $n = \Omega(N^\gamma)$ can be ensured mechanically.

Observation A.1. *Let $0 \leq \gamma \leq 1$. Given two N -dimensional vectors u, v of compressed size $O(N^\gamma)$, we can compute two $O(N)$ -dimensional vectors u', v' of compressed size $\Theta(N^\gamma)$ with the same inner product.*

Proof. Append 0^{N^γ} using $\Theta(N^\gamma)$ additional rules to the encodings of u and v . □

The Strong k SUM Assumption To generalize the lower bound of Theorem 1.1 so that it works for an arbitrary relationship between compressed and uncompressed sizes, we will use an assumption about a generalized version of 3SUM.

Definition A.2 (The k SUM Problem). *Given k sets A_1, \dots, A_k of m integers in $\{1, \dots, U\}$, decide if there are k numbers $a_1 \in A_1, \dots, a_k \in A_k$ such that $a_1 + \dots + a_{k-1} = a_k$.*

For all constant $k \geq 3$ a simple meet-in-the-middle algorithm with hashing solves k SUM in $O(m^{\lfloor k/2 \rfloor})$ time, and no faster algorithm by m^ϵ factors, for any $\epsilon > 0$, is known to date, unless the universe size U is smaller than $O(m^{\lfloor k/2 \rfloor - \epsilon})$. This is because Fast Fourier Transform gives an $O(m + kU \log U)$ time algorithm [27]. It is conjectured that substantially faster algorithms do not exist (e.g. in [4, 2]).

The Strong k SUM Conjecture. For all constant $k \geq 3$ it holds that: no algorithm can solve the k SUM problem with $U = O(m^{\lceil k/2 \rceil})$ in $O(m^{\lceil k/2 \rceil - \varepsilon})$ time, where $\varepsilon > 0$.

Observe that this assumption is about all $k \geq 3$ and therefore implies the Strong 3SUM conjecture as a special case. Intuitively, the reason this problem helps us give reductions where the vectors are much more compressible is that, compared to 3SUM, as k grows the ratio between the time complexity $m^{k/2}$ and the input size m grows.

B Vector Inner Product

In this section, we prove the generalization of the lower bound of Theorem 1.1 to arbitrary relationships between compressed and uncompressed sizes of the vectors.

Theorem B.1. *Let $0 < \varepsilon < 1/3$. Assuming the Strong k SUM conjecture for all constant k , the inner product of two N -dimensional vectors that are grammar-compressed to size $n = \Theta(N^\varepsilon)$ cannot be computed in $O(N^{1/3 - \delta})$ time, where $\delta > 0$.*

This result follows from the following stronger statement.

Theorem B.2. *Let $k \geq 3$. Assuming the Strong k SUM conjecture, the inner product of two N -dimensional vectors that are grammar-compressed to size $n = \Theta(N^{1/\lceil \frac{3k-4}{2} \rceil})$ cannot be computed in $O(N^{(1/3 + \gamma_k) - \delta})$ time, where $\delta > 0$ and*

$$\gamma_k := \begin{cases} \frac{2}{3(k-1)}, & \text{if } k \text{ is odd,} \\ \frac{4}{9k-12}, & \text{if } k \text{ is even.} \end{cases}$$

Observe that the above statement implies Theorem B.1: For any $0 < \varepsilon < 1/3$, we choose k sufficiently large such that $1/\lceil \frac{3k-4}{2} \rceil < \varepsilon$. Then using Observation A.1, we obtain that any $O(N^{1/3 - \delta})$ -time algorithm for Vector Inner Product with compressed size $n = \Theta(N^\varepsilon)$ would give an $O(N^{1/3 + \gamma_k - \delta'})$ -time algorithm for Vector Inner Product with compressed size $O(N^{1/\lceil \frac{3k-4}{2} \rceil}) = O(N^\varepsilon)$, where $\delta' = \gamma_k + \delta$ – this would refute the Strong k SUM conjecture by Theorem B.2.

Furthermore, observe that if we set $k = 3$, we obtain a $\tilde{\Omega}(N^{2/3})$ lower bound for compressed size $n = \Theta(N^{1/3})$ under the Strong 3SUM conjecture.

In the remainder of this section, we give the proof of Theorem B.2. The central construction is captured by the following lemma.

Lemma B.3. *Given sets A_1, \dots, A_k of integers in $\{1, \dots, U\}$, we define*

$$\begin{aligned} v'_{A_1 + \dots + A_{k-1}} &:= \bigcirc_{\substack{(a_1, \dots, a_{k-2}) \in A_1 \times \dots \times A_{k-2} \\ \text{in lexicographic order}}} 0^{a_1 + \dots + a_{k-2}} v_{A_{k-1}} 0^{(k-2)U - a_1 - \dots - a_{k-2}}, \\ v'_{A_k} &:= (v_{A_k} 0^{(k-2)U}) m^{k-2}, \end{aligned}$$

where $v_{A_{k-1}}, v_{A_k} \in \{0, 1\}^U$ denote the characteristic vectors of the sets A_{k-1}, A_k . We have the following properties:

1. *The inner product of the $m^{k-2}(k-1)U$ -dimensional vectors $v'_{A_1 + \dots + A_{k-1}}$ and v'_{A_k} is nonzero if and only if there is a tuple $(a_1, \dots, a_k) \in A_1 \times \dots \times A_k$ with $a_1 + \dots + a_{k-1} = a_k$.*
2. *We can compute compressions of $v'_{A_1 + \dots + A_{k-1}}, v'_{A_k}$ of size $O(km \log U) = O(m \log U)$ in time $O(m \log U)$.*

Proof. For 1., observe that by construction, $v'_{A_1 + \dots + A_{k-1}}$ and v'_{A_k} consist of m^{k-2} blocks, indexed by $(a_1, \dots, a_{k-2}) \in A_1 \times \dots \times A_{k-2}$ and consisting of the sequence $0^{a_1 + \dots + a_{k-2}} v_{A_{k-1}} 0^{(k-2)U - a_1 - \dots - a_{k-2}}$ and $v_{A_k} 0^{(k-2)U}$ of length $(k-1)U$, respectively. In particular, in block (a_1, \dots, a_{k-2}) there is a common 1-entry t if and only if $t = (a_1 + a_2 + \dots + a_{k-2}) + a$ for some $a \in A_{k-1}$ and $t = a'$ for some $a' \in A_k$. Thus, there exists a common 1-entry in $v'_{A_1 + \dots + A_{k-1}}$ and v'_{A_k} if and only if there are $(a_1, \dots, a_k) \in A_1 \times \dots \times A_k$ with $a_1 + \dots + a_{k-1} = a_k$.

For 2., we first recall that as shown in the proof of Theorem 1.1, we can compute a compression of the characteristic vectors $v_{A_{k-1}}$ and v_{A_k} of size $O(m \log U)$ in time $O(m \log U)$. Thus, using Proposition 2.1, we

can compute a compression of $v'_{A_k} = (v_{A_k} 0^{(k-2)U})^{m^{k-2}}$ of size $O(m \log U) + O(\log((k-2)U)) + O(\log m^{k-2}) = O(m \log U)$ in time $O(m \log U)$. To show the claim for $v'_{A_1+\dots+A_{k-1}}$, we proceed inductively and construct the strings $v'_{A_{k-1}} := v_{A_{k-1}}$ and

$$v'_{A_i+\dots+A_{k-1}} := \bigcirc_{\substack{(a_i, \dots, a_{k-2}) \in A_i \times \dots \times A_{k-2} \\ \text{in lexicographic order}}} 0^{a_i+\dots+a_{k-2}} v_{A_{k-1}} 0^{(k-1-i)U-a_i-\dots-a_{k-2}},$$

for $i = k-2, \dots, 1$. The central observation is that we can write $A_i = \{a_1^{(i)}, \dots, a_m^{(i)}\}$ with $a_1^{(i)} < a_2^{(i)} < \dots < a_m^{(i)}$ and obtain

$$v'_{A_i+\dots+A_{k-1}} = \bigcirc_{j=1}^m 0^{a_j^{(i)}} v'_{A_{i+1}+\dots+A_{k-1}} 0^{U-a_j^{(i)}}.$$

Thus, given an SLP \mathcal{G}_{i+1} for $v'_{A_{i+1}+\dots+A_{k-1}}$ with starting symbol S_{i+1} , we can give an SLP \mathcal{G}_i for $v'_{A_i+\dots+A_{k-1}}$ of size $|\mathcal{G}_{i+1}| + O(m \log U)$ as follows: For each $j = 1, \dots, m$, we encode $0^{a_j^{(i)}}$ using $O(\log a_j^{(i)}) = O(\log U)$ additional symbols, re-use S_{i+1} to generate $v'_{A_{i+1}+\dots+A_{k-1}}$, and encode $0^{U-a_j^{(i)}}$ using $O(\log(U - a_j^{(i)})) = O(\log U)$ additional symbols. Observe that we can obtain this compression in time $O(m \log U)$.

Thus, starting from an SLP for $v'_{A_{k-1}}$, after $k-2$ steps we obtain an SLP \mathcal{G}_1 for $v'_{A_1+\dots+A_{k-1}}$ of size $O(km \log U) = O(m \log U)$. The running time of this construction is $O(km \log U) = O(m \log U)$, concluding the proof. \square

Let $A_1, \dots, A_k \subseteq \{1, \dots, U\}$ be a Strong k SUM instance, i.e., $U = O(m^{\lceil k/2 \rceil})$. The reduction given in Lemma B.3 gives two vectors v, v' of dimension $m^{k-2} \cdot (k-1)U$ such that their inner product allows us to decide the k SUM instance. Furthermore, the vectors have a compressed size of $O(m \log U)$.

We slightly adapt v, v' by appending 0's to increase the dimension slightly to $N = m^{k-2} \cdot (k-1)U \log^{\lceil (3k-4)/2 \rceil} U$ (this does not change their inner product). We verify the following facts: (1) an $O(N^{1/3+\gamma_k-\delta})$ -time Vector Inner Product algorithm for some $\delta > 0$ refutes the Strong k SUM conjecture and (2) $n = O(N^{1/\lceil \frac{3k-4}{2} \rceil})$. Using Observation A.1, this concludes the proof of Theorem B.2.

For (1), consider first the case that k is odd. Then $U = O(m^{(k+1)/2})$ and $N = O(m^{k-2}U \text{polylog} U) = O(m^{3(k-1)/2} \text{polylog} m)$. Observe that

$$\begin{aligned} N^{1/3+\gamma_k-\delta} &= O(m^{\frac{3(k-1)}{2} \cdot (\frac{1}{3} + \frac{2}{3(k-1)} - \delta)} \text{polylog} m) \\ &= O(m^{\frac{k-1}{2} + 1 - \frac{3(k-1)}{2} \delta}) = O(m^{\lceil \frac{k}{2} \rceil - \delta'}), \end{aligned}$$

for any $0 < \delta' < 3(k-1)\delta/2$.

Similarly, for even k , we have $U = O(m^{k/2})$ and $N = O(m^{k-2}U \text{polylog} U) = O(m^{(3k-4)/2} \text{polylog} m)$. Using $1/3 + \gamma_k = 1/3 + 4/(9k-12) = k/(3k-4)$, we obtain that

$$N^{1/3+\gamma_k-\delta} = O(m^{\frac{3k-4}{2} \cdot (\frac{k}{3k-4} - \delta)} \text{polylog} m) = O(m^{\frac{k}{2} - \delta'}),$$

for any $0 < \delta' < (3k-4)\delta/2$. Thus, in both cases, an $O(N^{1/3+\gamma_k-\delta})$ -time Vector Inner Product algorithm refutes the Strong k SUM conjecture by solving the given k SUM instance in time $O(m^{\lceil k/2 \rceil - \delta'})$ with $\delta' > 0$.

Finally, for (2), note that $N = O(m^{k-2}U \log^{\lceil (3k-4)/2 \rceil} U) = O(m^{\lceil (3k-4)/2 \rceil} \log^{\lceil (3k-4)/2 \rceil} m)$. Thus $n = O(m \log m) = O(N^{1/\lceil (3k-4)/2 \rceil})$, as desired.

C Matrix-Vector Product

In this section we provide the full proof of Theorem 1.2. We first prove a self-reduction for 3SUM as a central tool (using standard techniques), and then proceed to give the final reduction.

C.1 Proof of the Self-Reduction

Let us restate Lemma 4.1.

Lemma C.1 (Self-Reduction for 3SUM). *Let $1 \leq s = s(m) \leq m$ and $\varepsilon > 0$ be arbitrary. If there is an algorithm that, given a target t and $L = O((m/s)^2)$ sets A_ℓ, B_ℓ, C_ℓ of s integers in $\{1, \dots, O(s^3 \log^2 s)\}$, determines for all $1 \leq \ell \leq L$ whether there are $a \in A_\ell, b \in B_\ell, c \in C_\ell$ with $a + b + c = t$ in total time $O(m^{2-\varepsilon})$, then the 3SUM conjecture is false.*

In the remainder of this section, we give the proof.

Let A, B, C be sets of m integers in $\{1, \dots, U\}$. We use a couple of results from earlier work that are stated for the following 3SUM formulation: given three sets A', B', C' of m integers in $\{-U, \dots, U\}$ with $U = O(m^3 \log^2 m)$, we are asked to determine whether there are $a \in A', b \in B', c \in C'$ such that $a + b + c = 0$. We first reduce our formulation to this formulation by setting $A' := A, B' := B$, and $C' := -C = \{-c \mid c \in C\}$. We can now use the following known self-reduction for 3SUM.

Lemma C.2 (Reformulated from [62, Theorem 13]). *Let $s := s(m)$ with $1 \leq s \leq m$. Given three sets A', B', C' of m integers in $\{-U, \dots, U\}$, we can compute, in time $O(m^2/s)$, a list of $L = O((m/s)^2)$ 3SUM instances, i.e., sets $A'_\ell, B'_\ell, C'_\ell$ with $1 \leq \ell \leq L$, such that there is an $a \in A', b \in B', c \in C'$ with $a + b + c = 0$ if and only if there is an instance $1 \leq \ell \leq L$ and a triple $a \in A'_\ell, b \in B'_\ell, c \in C'_\ell$ with $a + b + c = 0$. Furthermore, each $A'_\ell, B'_\ell, C'_\ell$ is a subset of s integers of A', B', C' , respectively.*

Proof sketch. We give the high-level arguments (for details, see the proof of Theorem 13 in [62]). For a set S , let $\min S$ and $\max S$ denote the smallest and largest element in S , respectively. We sort A', B', C' and split each array into $\lceil m/s \rceil$ consecutive parts $A'_1, \dots, A'_{\lceil m/s \rceil}, B'_1, \dots, B'_{\lceil m/s \rceil}, C'_1, \dots, C'_{\lceil m/s \rceil}$, each of at most s elements, such that $\max A'_i < \min A'_{i+1}, \max B'_i < \min B'_{i+1}$ and $\max C'_i < \min C'_{i+1}$ for all i . Instead of searching for a 3SUM triple $a \in A'_i, b \in B'_j, c \in C'_k$ for each $1 \leq i, j, k \leq \lceil m/s \rceil$ (i.e., $\Theta((m/s)^3)$ subproblems with s elements each), one observes that most subproblems can be trivially solved: We say that a subproblem (i, j, k) is trivial, if $\min A_i + \min B_j + \min C_k > 0$ or $\max A_i + \max B_j + \max C_k < 0$; these subproblems cannot contain a solution. The key insight is that there are at most $O((m/s)^2)$ non-trivial subproblems (which follows since the *domination* partial ordering on $\{1, \dots, u\}^3$ has at most $O(u^2)$ incomparable elements); these can be determined in time $O((m/s)^2)$. Thus, it suffices to list all $O((m/s)^2)$ non-trivial subproblems with s integers in each set in time $O(m^2/s)$. \square

The resulting instances $A'_\ell, B'_\ell, C'_\ell$ consist of integers in $\{-U, \dots, U\}$ with large universe size $U = O(m^3 \log^2 m)$. We reduce the universe size to $O(s^3 \log^2 s)$ using a folklore technique (a slightly stronger result with $U = O(s^3)$ can be achieved using the techniques of [15]). To prepare notation, for any set S , we let $S \bmod p := \{s \bmod p \mid s \in S\}$.

Lemma C.3 (Adaptation of [5, Lemma B.1]). *There is some α such that $U' := \alpha s^3 \log s \log U$ satisfies the following property: Let A, B, C be sets of s integers in $\{-U, \dots, U\}$ such that no $a \in A, b \in B, c \in C$ satisfies $a + b + c = 0$. Let p be a prime chosen uniformly at random from $\{2, \dots, U'\}$. Then the probability that there are $a_p \in A \bmod p, b_p \in B \bmod p, c_p \in C \bmod p$ with $a_p + b_p + c_p \equiv 0 \pmod{p}$ is at most $1/2$.*

Proof. Let $a \in A, b \in B, c \in C$ be arbitrary. Since $a + b + c \neq 0$, note that $(a \bmod p) + (b \bmod p) + (c \bmod p) \equiv 0 \pmod{p}$ if and only if p divides $a + b + c$. Since $a + b + c \in \{-3U, \dots, 3U\}$, $a + b + c$ has at most $\log_2(3U)$ prime factors. Let P denote the number of prime numbers in $\{2, \dots, U'\}$; by the prime number theorem we can choose α large enough such that $P \geq 2s^3 \log_2(3U)$. Thus, the probability that p was chosen among these at most $\log_2(3U)$ prime factors is at most $\log_2(3U)/P \leq 1/(2s^3)$. Thus, by a union bound over all s^3 triples $a \in A, b \in B, c \in C$, the probability that there are $a_p \in A \bmod p, b_p \in B \bmod p, c_p \in C \bmod p$ with $a + b + c \equiv 0 \pmod{p}$ is at most $1/2$. \square

Note that if A, B, C contain a triple a, b, c with $a + b + c = 0$, then also $A \bmod p, B \bmod p, C \bmod p$ contain a triple a_p, b_p, c_p with $a_p + b_p + c_p \equiv 0 \pmod{p}$ for any p .

We can finally prove Lemma C.1: Assume that there is an algorithm \mathcal{A} that given a target t and $L = O((m/s)^2)$ instances $A_\ell, B_\ell, C_\ell, 1 \leq \ell \leq L$ of s integers in $\{1, \dots, U'\}$, determines for all $1 \leq \ell \leq L$ whether there are $a \in A_\ell, b \in B_\ell, c \in C_\ell$ with $a + b + c = t$ in total time $O(m^{2-\varepsilon})$ with $\varepsilon > 0$. Observe that since \mathcal{A} runs in time $O(m^{2-\varepsilon})$, we must have $s = \Omega(m^\varepsilon)$, since otherwise already the size of the input to \mathcal{A} of $\Theta(m^2/s)$ would be $\omega(m^{2-\varepsilon})$. Thus, we have $U' = O(s^3 \log^2 s)$.

For $r = 1, \dots, \gamma \log m$ many repetitions, we do the following: We choose a random prime $p_r \in [2, U']$ and obtain ℓ instances in $\{0, \dots, p_r - 1\} \subseteq \{0, \dots, U\}$ by taking the sets modulo p_r , i.e., $A_\ell^{(r)} := A_\ell \bmod p_r$,

$B_\ell^{(r)} := B'_\ell \bmod p_r$, and $C_\ell^{(r)} = C'_\ell \bmod p_r$. Observe that we may determine whether there is some $a \in A_\ell^{(r)}, b \in B_\ell^{(r)}, c \in C_\ell^{(r)}$ with $a + b + c \equiv 0 \pmod{p_r}$ by testing for each $t \in \{0, p_r, 2p_r\}$, whether there $a \in A_\ell^{(r)}, b \in B_\ell^{(r)}, c \in C_\ell^{(r)}$ with $a + b + c = t$. Thus, to do this, and additionally ensure that each integer is in $\{1, \dots, U\}$, we add 1 to each integer in $A_\ell^{(r)}, B_\ell^{(r)}, C_\ell^{(r)}$ and for each $\lambda \in \{0, 1, 2\}$, call \mathcal{A} on the sets $A_\ell^{(r)}, B_\ell^{(r)}, C_\ell^{(r)}$, $1 \leq \ell \leq L$ with common target $t_\lambda := 3 + \lambda p_r$.

Observe that after these $3\gamma \log m$ calls to \mathcal{A} , we know for each $1 \leq \ell \leq L$ and $1 \leq r \leq \gamma \log m$ whether there are $a \in A'_\ell, b \in B'_\ell, c \in C'_\ell$ with $a + b + c \equiv 0 \pmod{p_r}$. We declare our original 3SUM instance A, B, C to be a YES instance if and only if there is some ℓ such that for all r we have found a witness $a \in A'_\ell, b \in B'_\ell, c \in C'_\ell$ with $a + b + c \equiv 0 \pmod{p_r}$. Note that if A, B, C is a YES instance, we always return YES by Lemma C.2. Otherwise, if A, B, C is a NO instance, consider a fixed ℓ . By Lemmas C.2 and C.3, the probability that for all r , we find $a \in A'_\ell, b \in B'_\ell, c \in C'_\ell$ with $a + b + c \equiv 0 \pmod{p_r}$ is bounded by $2^{-\gamma \log m} = m^{-\gamma}$. Thus, by a union bound over all ℓ , the probability that we incorrectly return YES in this case is at most $Lm^{-\gamma} = O((m/s)^2 m^{-\gamma}) = O(m^{2-\gamma})$. We can make this error probability polynomially small by choosing $\gamma > 2$.

Observe that the running time of the above process is $O(\log m)$ times the running time of \mathcal{A} (note that the running time used for Lemma C.2 is linear in its output size, which is the input size of \mathcal{A} and thus dominated by the running time of \mathcal{A}). Thus, we can solve any 3SUM instance in time $O(m^{2-\epsilon} \log m)$, which would refute the 3SUM conjecture. This concludes the proof of Lemma C.1.

C.2 Main Reduction for Matrix-Vector Multiplication

We now turn to the proof of Theorem 1.2.

Proof. Let s be a parameter to be chosen later. By Lemma 4.1, it suffices to solve $L = O((m/s)^2)$ 3SUM instances A_ℓ, B_ℓ, C_ℓ consisting of s integers in $\{1, \dots, U\}$, $U = O(s^3 \log^2 s)$ with common target $1 \leq t \leq 3U$ in time $O(m^{2-\epsilon})$ for some $\epsilon > 0$ to contradict the 3SUM conjecture.

We construct an $(L \times 3s^2U)$ matrix M and $v \in \{0, 1\}^{3s^2U}$ as follows. Intuitively, each row M_ℓ and the vector v are partitioned into s^2 blocks of size $3U$. Each block is indexed by (i, j) with $i, j \in \{1, \dots, s\}$ in lexicographic order and the block of M_ℓ corresponding to (i, j) encodes the characteristic vector of the set $a_i + b_j + C_\ell = \{a_i + b_j + c \mid c \in C_\ell\} \subseteq \{1, \dots, 3U\}$, where a_i is the i -th integer in A_ℓ and b_j is the j -th integer in B_ℓ . Correspondingly, every block (i, j) in v encodes the characteristic vector of the singleton set $\{t\} \subseteq \{1, \dots, 3U\}$. Thus, there is a position in block (i, j) in which both M_ℓ and v have a 1 if and only if there is a $c \in C_\ell$ such that $a_i + b_j + c = t$.

Formally, for any $1 \leq \ell \leq L$, we write $A_\ell = \{a_1^\ell, \dots, a_s^\ell\}$, $B_\ell = \{b_1^\ell, \dots, b_s^\ell\}$ and define

$$\begin{aligned} M_\ell &:= \underbrace{0^{a_1+b_1} v_{C_\ell} 0^{3U-a_1-b_1}}_{v_{a_1^\ell+b_1^\ell+C_\ell}} \quad \dots \quad \underbrace{0^{a_i+b_j} v_{C_\ell} 0^{3U-a_i-b_j}}_{v_{a_i^\ell+b_j^\ell+C_\ell}} \quad \dots \quad \underbrace{0^{a_s+b_s} v_{C_\ell} 0^{3U-a_s-b_s}}_{v_{a_s^\ell+b_s^\ell+C_\ell}}, \\ v &:= \underbrace{0^{t-1} 1 0^{3U-t}}_{v_{a_1^\ell+b_1^\ell+C_\ell}} \quad \dots \quad \underbrace{0^{t-1} 1 0^{3U-t}}_{v_{a_i^\ell+b_j^\ell+C_\ell}} \quad \dots \quad \underbrace{0^{t-1} 1 0^{3U-t}}_{v_{a_s^\ell+b_s^\ell+C_\ell}}, \end{aligned}$$

where $v_{C_\ell} \in \{0, 1\}^U$ denotes the characteristic vector of C_ℓ . By this structure, it is clear that $M_\ell v \geq 1$ if and only if there are $a \in A_\ell, b \in B_\ell, c \in C_\ell$ with $a + b + c = t$.

We will show that each row M_ℓ can be compressed to size $\Theta(s \log s)$ (as opposed to its RLE of length $\Theta(s^3 \log s)$). We thus will set $N = \lceil 3s^2U \log^3 s \rceil = \Theta(s^5 \log^5 s)$, and append 0^{N-3s^2U} to each row M_ℓ and v , so that we obtain an $L \times N$ matrix M' and N -dimensional vector v' whose product $M'v'$ can be used to solve all instances A_ℓ, B_ℓ, C_ℓ in linear time. Observe that each row has a compression of size $\Theta(N^{1/5}) = \Theta(s \log s)$, as desired. Since $L = O((m/s)^2)$ and $N \geq s^5$, we can set $s = \Theta(m^{2/7})$ such that $L \leq N$ (we can indeed make $L = N$ by introducing zero rows, if necessary). Thus, an $O(Nn^{2-\epsilon})$ -time algorithm for multiplying M' and v' would solve all L 3SUM instances in time

$$O(Nn^{2-\epsilon}) = O((m/s)^2 (s \log s)^{2-\epsilon}) = O((m^2/s^\epsilon) \text{polylog } s) = O(m^{2-\frac{2}{7}\epsilon} \text{polylog } m),$$

which would refute the 3SUM conjecture.

Analogous to the proof of Theorems 1.1 and B.2, we can compute a compression of size $\Theta(s \log s)$ in time $O(s \log s)$. Indeed, for each M_ℓ , this already follows from Lemma B.3 when setting $A_1 := A_\ell, A_2 :=$

$B_\ell, A_3 := C_\ell$, which shows how to compress the string $v'_{A_1+A_2+A_3} = M_\ell$ to size $O(s \log U) = O(s \log s)$ in time $O(s \log U) = O(s \log s)$. For v , we simply apply Proposition 2.1 to the straightforward compression of $0^{t-1}10^{3U-t}$ to size $O(\log U)$, which leads to a compression of v of size $O(\log U + \log s) = O(\log s)$. Using Observation A.1, we can make all encodings have size $\Theta(s \log s)$, which concludes the proof. \square

D Matrix-Matrix Product

In this section, we give the full proof of Theorem 5.1.

Proof of Theorem 5.1. Let $\ell \in \mathbb{N}$. We first define the matrices A', B' where A' is a $(2^\ell \times 2^\ell)$ matrix with rows indexed by strings $x \in \{0, 1\}^\ell$ in lexicographic order, and B' is a $(2^\ell \times 2^\ell(2\ell))$ matrix with columns indexed by $(y, k) \in \{0, 1\}^\ell \times \{1, \dots, 2\ell\}$ in lexicographic order. For arbitrary $z \in \{0, 1\}^\ell$, let $\text{diag}(z)$ denote the $\ell \times \ell$ diagonal matrix with z on the diagonal. We define

$$A'_x := (x \mid 1^\ell), \quad B'_{(y,1), \dots, (y,2\ell)} := \left(\begin{array}{c|c} \text{diag}(1^\ell) & 0 \\ \hline 0 & \text{diag}(y) \end{array} \right).$$

Let $C' = A'B'$ be the $(2^\ell \times 2^\ell(2\ell))$ product matrix of A' and B' , with rows and columns indexed by $\{0, 1\}^\ell$ and $\{0, 1\}^\ell \times \{1, \dots, 2\ell\}$, respectively. Observe that by definition, $(C'_{x,(y,1)}, \dots, C'_{x,(y,2\ell)}) = (x \mid y)$ for any $x, y \in \{0, 1\}^\ell$. In particular, when we view C' as a $2^{2\ell}(2\ell)$ -length string, it contains all strings in $\{0, 1\}^{2\ell}$ as substrings, thus by Lemma 5.2, any row-wise compression is of size at least $2^{2\ell}/(2\ell)$.

To also ensure column-wise incompressibility, we slightly extend the construction by analogous transposed constructions: We let $N := 2^\ell(2\ell + 1)$ and define the final $(N \times N)$ matrices A, B as follows:

$$A := \left(\begin{array}{c|c|c} A' & 0 & 0 \\ \hline 0 & B'^T & 0 \end{array} \right), \quad B := \left(\begin{array}{c|c} B' & 0 \\ \hline 0 & A'^T \\ \hline 0 & 0 \end{array} \right).$$

Since $C := AB = \left(\begin{array}{c|c} A'B' & 0 \\ \hline 0 & (A'B')^T \end{array} \right)$ contains all length- (2ℓ) strings as substrings of the rows (in the $A'B'$ part) and as substrings of the columns (in the $(A'B')^T$ part), any strong compression of C is of size at least $2^{2\ell}/(2\ell) = \Omega(N/\log^2 N)$, proving the third part of the claim.

For the first two parts, it remains to show that A and B can be well compressed: For the convenient compression, we observe that any row in A is either of the form $(x1^\ell \mid 0^{2\ell} \mid 0^{N-4\ell})$, which has a RLE of length at most $|x1^\ell| + O(\log N) = O(\log N)$, or it is of the form $(0^{2\ell} \mid 0^{i-1}\alpha 0^{2\ell-i} \mid 0^{N-4\ell})$ for some $\alpha \in \{0, 1\}, i \in \{1, \dots, 2\ell\}$, which also has a RLE of length at most $O(\log N)$. Thus, each of the N rows of A can be compressed to size $O(\log N)$, as desired. By a symmetric statement, also each column of B has a RLE of size $O(\log N)$.

Finally, for the strong compression, we show that we compress A^T when viewed as a string, i.e., we compress the concatenation of the columns of A . The main insight is the following: Imagine a binary ℓ -bit counter. Using grammar compression, we can compress the sequence of values of any fixed bit while the counter counts from 0 to $2^\ell - 1$ in size $O(\ell)$. Formally, let G_0, G_1 be grammar compressions of strings s_0, s_1 . For any $1 \leq i \leq \ell$, we can encode $(s_0^{2^{\ell-i}} s_1^{2^{\ell-i}})^{2^{i-1}}$ using only $O(\ell)$ additional non-terminals in the canonical way. Specifically, using $O(\ell - i)$ new symbols, we may encode $s_0^{2^{\ell-i}} s_1^{2^{\ell-i}}$; let \tilde{S} denote the corresponding non-terminal. We then encode $\tilde{S}^{2^{i-1}}$ using $O(i)$ additional new symbols. In total, we only need $O((\ell - i) + i) = O(\ell)$ additional symbols, as desired.

We apply the above idea to encode the concatenation all columns of A as follows: Consider column i .

- For $1 \leq i \leq \ell$, then by the chosen lexicographic order of the row indices $x \in \{0, 1\}^\ell$ of A' , note that the i -th column of A is of the form $(0^{2^{\ell-i}} 1^{2^{\ell-i}})^{2^{i-1}} \mid 0^{N-2^\ell}$. Using the above analysis, we can compress it to size $O(\ell) + O(\log N) = O(\log N)$.
- If $\ell + 1 \leq i \leq 2\ell$, the i -th column is of the form $1^{2^\ell} \mid 0^{N-2^\ell}$, which we can compress to size $O(\log \ell + \log N) = O(\log N)$.

- If $2\ell + 1 \leq i \leq 3\ell$, write $i = 2\ell + i'$ and observe that the i -th column of A is of the form $0^{2^\ell} \mid (0^{i'-1}10^{\ell-i'})^{2^\ell}$. Using $O(\ell)$ non-terminals to encode $0^{i'-1}10^{\ell-i'}$, it is immediate that we can compress the complete column using $O(\ell)$ additional non-terminals, i.e., yielding a total of $O(\ell) = O(\log N)$.
- If $3\ell + 1 \leq i \leq 4\ell$, write $i = 3\ell + i'$ and observe that by the chosen lexicographic order of the column indices $(y, k) \in \{0, 1\}^\ell \times \{1, \dots, 2\ell\}$ of B' , the i -th column of A is of the form $0^{2^\ell} \mid (s_0^{2^{\ell-i'}} s_1^{2^{\ell-i'}})^{2^{i'-1}}$ where $s_\alpha := 0^{i'-1}\alpha 1^{\ell-i'}$. We can give trivial grammars of size $O(\ell)$ for s_0, s_1 . Then, by the above analysis, we only need $O(\ell)$ additional non-terminals for the counter-like part. In total, we only need $O(\ell) = O(\log N)$ non-terminals to encode the i -th column.
- Finally, observe that the remaining columns $i = 4\ell + 1, \dots, N$ consist of $(N - 4\ell)N$ zeroes, which we can encode together using only $O(\log N)$ non-terminals.

In summary, we can encode the first 4ℓ columns using $O(\log N)$ non-terminals each, and only $O(\log N)$ non-terminals for the remaining columns, so we can fully compress the concatenation of A 's columns to size $O(\log^2 N)$, as claimed. \square