

# Sharp asymptotics on the compression of two-layer neural networks

Mohammad Hossein Amani,<sup>1</sup> Simone Bombari,<sup>2</sup> Marco Mondelli,<sup>2</sup> Rattana Pukdee, and<sup>3</sup> Stefano Rini<sup>4</sup>.

<sup>1</sup> EPFL, Switzerland, email: mh.amani1998@gmail.com

<sup>2</sup> ISTA, Austria, email: {simone.bombari marco.mondelli}@ista.ac.at

<sup>3</sup> CMU, USA, email: rpukdee@andrew.cmu.edu

<sup>4</sup> NYCU, Taiwan, email: stefano.rini@nycu.edu.tw

**Abstract**—In this paper, we study the compression of a *target* two-layer neural network with  $N$  nodes into a *compressed* network with  $M < N$  nodes. More precisely, we consider the setting in which the weights of the target network are i.i.d. sub-Gaussian, and we minimize the population  $L_2$  loss between the outputs of the target and of the compressed network, under the assumption of Gaussian inputs. By using tools from high-dimensional probability, we show that this non-convex problem can be simplified when the target network is sufficiently over-parameterized, and provide the error rate of this approximation as a function of the input dimension and  $N$ . In this mean-field limit, the simplified objective, as well as the optimal weights of the compressed network, does not depend on the realization of the target network, but only on expected scaling factors. Furthermore, for networks with ReLU activation, we conjecture that the optimum of the simplified optimization problem is achieved by taking weights on the Equiangular Tight Frame (ETF), while the scaling of the weights and the orientation of the ETF depend on the parameters of the target network. Numerical evidence is provided to support this conjecture.

## I. INTRODUCTION

The compression of Deep Neural Networks (DNNs) plays a crucial role in many modern-day applications in which inference has to be performed at minimal computational cost. This occurs, for instance, in the IoT paradigm: here, classic DNN tasks (e.g., image classification, speech recognition, and anomaly detection) have to be implemented over diverse platforms with limited computational capabilities. In this scenario, large DNNs trained over vast datasets have to be severely compressed to fit the current hardware limitations. Several empirical studies have shown that over-parameterized DNNs are often highly redundant and, hence, smaller sub-networks can be identified which perform close to the original DNN [1]. This observation has motivated the emergence of a host of different approaches to identify such sub-networks [2]. Despite the very promising empirical results, the ultimate performance of DNN compression is yet to be characterized. This problem can be summarized as the following question:

The work of M.H.A. and R.P. was performed while at ISTA. M.H.A., S.B., M.M., and R.P. were partially supported by the 2019 Lopez-Loreta Prize. The work of S.R. was supported by the MOST grant 110-2221-E-A49 -052.

To appear at the IEEE Information Theory Workshop (ITW) 2022, Mumbai, India.

*What is the minimum performance loss that can be guaranteed when compressing any network of  $N$  nodes into a smaller network of  $M < N$  nodes?*

**Main contributions.** In this paper, we address the above question by investigating the limiting performance when approximating a two-layer *target* network with  $N$  neurons via a two-layer *compressed* network with  $M$  neurons. More precisely, we assume that (i) the input features are Gaussian, and that (ii) the network weights are i.i.d. sub-Gaussian. Then, we consider the problem of determining the parameters of the compressed network which minimize the expected  $L_2$  distance (population loss) between the outputs of the target and compressed network. This optimization can be divided into the two sub-problems: that of determining the *amplitudes* and the *directions* of the weights. While finding the amplitudes boils down to linear regression, finding the directions is challenging. Thus, by using tools from high-dimensional probability, we show that this latter problem can be simplified in the asymptotic regime in which  $N, d \gg 1$ . We highlight that the simplified objective and the optimal parameters of the pruned network do not depend on the realization of the target network. Furthermore, if the activation function is ReLU, we formulate the *Equiangular Tight Frame (ETF) conjecture*, that is, we conjecture that the optimal choice of weights on the compressed network forms an ETF (see Fig. 1), while the orientation of the ETF and the scaling of the neuronal outputs depends on the parameters of the target network. We also provide numerical evidence supporting our conjecture.

**Related work.** Early work used the second order Taylor approximation of the cost function to determine the relevance of the network weights [3], [4]. Using this change as a measure of saliency, weights corresponding to low saliency are pruned from the network. The magnitude of the weights has also been considered as a measure of saliency [5]–[7]. The main advantage of these methods relies on their computational efficiency. The so called “lottery ticket hypothesis” suggests that pruning should be performed in a structured manner [8], and sparsification techniques which promote a structured form of sparsity have been considered e.g. in [9]. In [10], the authors consider a “greedy forward selection” strategy in which the sub-network is obtained by successively

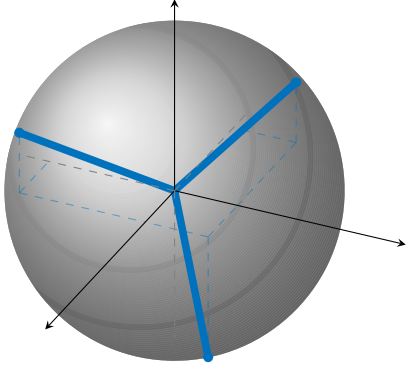


Fig. 1. A representation of the equiangular tight frame (ETF).

adding (with replacement) neurons to an empty network. In [11], pruning is performed via “neuron merging”, i.e., similar neurons are identified by the cosine similarity of their weights and they are successively merged.

**Notation.** We adopt the short-hands  $[m : n] \triangleq \{m, \dots, n\}$  and  $[n] \triangleq [1 : n]$ . We let  $\mathbf{1}$  be the all-1 vector, and  $\mathbf{I}$  the identity matrix. Given a vector  $v$ ,  $\|v\|_2$  denotes its  $L_2$  norm. Given a matrix  $M$ ,  $\|M\|_{\text{op}}$  denotes its operator norm,  $\|M\|_F$  the Frobenius norm, and  $M^+$  its Moore-Penrose pseudo-inverse. The unit sphere of dimension  $d$  is indicated as  $\mathcal{S}^{d-1}$ . The Gaussian distribution with mean  $\boldsymbol{\mu}$  and covariance matrix  $\mathbf{C}$  is denoted as  $\mathcal{N}(\boldsymbol{\mu}, \mathbf{C})$ . Given a sub-Gaussian random variable  $w$ , its sub-Gaussian norm is defined as  $\|w\|_{\psi_2} = \inf\{t > 0 : \mathbb{E}[\exp(w^2/t^2)] \leq 2\}$ . Given a random vector  $\mathbf{w} \in \mathbb{R}^d$ , its sub-Gaussian norm is defined as  $\|\mathbf{w}\|_{\psi_2} := \sup_{\mathbf{u}: \|\mathbf{u}\|_2=1} \|\mathbf{u}^\top \mathbf{w}\|_{\psi_2}$ .

## II. PROBLEM FORMULATION

Let the *target* network  $W$  be specified by (i) a set of *weight vectors*  $\{\mathbf{w}_n\}_{n \in [N]}$  with  $\mathbf{w}_n \in \mathcal{S}^{d-1}$ , and (ii) a set of *scaling coefficients*  $\{a_n\}_{n \in [N]}$  with  $a_n \in \mathbb{R}$ . Then, the output  $f_W(\mathbf{x})$  is obtained as

$$f_W(\mathbf{x}) = \frac{1}{N} \sum_{n \in [N]} a_n \sigma(\langle \mathbf{w}_n, \mathbf{x} \rangle), \quad (1)$$

where  $\sigma$  is the activation function. The *compressed* network  $V$  is specified by the weights  $\{\mathbf{v}_m\}_{m \in [M]}$  with  $\mathbf{v}_m \in \mathcal{S}^{d-1}$  and scaling coefficients  $\{b_m\}_{m \in [M]}$ , so that the output  $f_V(\mathbf{x})$  is obtained as

$$f_V(\mathbf{x}) = \frac{1}{M} \sum_{m \in [M]} b_m \sigma(\langle \mathbf{v}_m, \mathbf{x} \rangle). \quad (2)$$

As we allow for the coefficients  $\{a_n\}_{n \in [N]}$  and  $\{b_m\}_{m \in [M]}$ , the assumption that  $\mathbf{w}_n, \mathbf{v}_m \in \mathcal{S}^{d-1}$  is not particularly restrictive. Furthermore, if we assume that the activation function is ReLU ( $\sigma(x) = \max(x, 0)$ ) then, by using the homogeneity of  $\sigma$ , one can incorporate the norm of the weights  $\mathbf{w}_n$  and  $\mathbf{v}_m$  into the coefficients  $a_n$  and  $b_m$ , respectively.

Our goal is to compress (1) into (2) so that the expected  $L_2$  loss between the two outputs when the input is Gaussian, i.e.,

$$L(V, W) = \mathbb{E}_{\mathbf{X} \sim \mathcal{N}(\mathbf{0}, \mathbf{I})} [\|f_W(\mathbf{X}) - f_V(\mathbf{X})\|_2^2], \quad (3)$$

is minimized over the choice of  $\{b_m, \mathbf{v}_m\}_{m \in [M]}$ . We remark that, in the theoretical literature, it is common to assume that the input data is Gaussian, see e.g. [12, Remark 2]. Furthermore, the average  $L_2$  distance of two functions on a Gaussian input, as in (3), can be regarded as a proxy for understanding how close they behave on normalized (i.e. whitened) data.

A compact formulation of the expression in (3) using vector notation can be achieved by defining

$$g(\mathbf{u}, \mathbf{v}) = \mathbb{E}_{\mathbf{X} \sim \mathcal{N}(\mathbf{0}, \mathbf{I})} [\sigma(\mathbf{u}^\top \mathbf{X}) \sigma(\mathbf{v}^\top \mathbf{X})], \quad (4a)$$

$$[G_{WW}]_{ij} = g(\mathbf{w}_i, \mathbf{w}_j), \quad [G_{VV}]_{ij} = g(\mathbf{v}_i, \mathbf{v}_j), \quad (4b)$$

$$[G_{VW}]_{ij} = g(\mathbf{v}_i, \mathbf{w}_j). \quad (4c)$$

Similarly, we define the column vectors  $\mathbf{a}$ ,  $\mathbf{b}$  as  $[\mathbf{a}]_n = a_n$   $[\mathbf{b}]_m = b_m$ . Finally, defining  $\mathbf{s} := \frac{1}{N} G_{VW} \mathbf{a}$ , (3) becomes

$$L(V, W) = \frac{1}{N^2} \mathbf{a}^\top G_{WW} \mathbf{a} - \frac{2}{M} \mathbf{b}^\top \mathbf{s} + \frac{1}{M^2} \mathbf{b}^\top G_{VV} \mathbf{b}. \quad (5)$$

The entries of  $G_{VV}$ ,  $G_{WW}$ , and  $G_{VW}$  can be interpreted as correlations between neurons, and  $[\mathbf{s}]_i$  can be interpreted as the average correlation between the  $i^{\text{th}}$  neuron in the compressed network and all neurons in the target network. In this problem definition, we use the term “compression” with the following acceptance. The network  $W$  has been trained to perform an inference task over a given dataset. The problem at hand is to produce a smaller network  $V$  approximating  $W$  using only the knowledge of the network parameters.

In the remainder of the paper, we consider the following set of assumptions:

Assumption (A-x): the network input  $\mathbf{X}$  is Gaussian with zero mean and identity covariance.

Assumption (A-w): the target network weights  $\{\mathbf{w}_n\}_{n \in [N]}$  are i.i.d. zero-mean, unit-norm (i.e.,  $\mathbf{w}_n \in \mathcal{S}^{d-1}$ ) sub-Gaussian random vectors, with a sub-Gaussian norm  $\|\mathbf{w}_n\|_{\psi_2} \leq \sigma_W / \sqrt{d}$ .

Assumption (A-a): the scaling coefficients of the target network  $\{a_n\}_{n \in [N]}$  are i.i.d. bounded random variables, i.e.  $|a_n| \leq A$ , and they are independent of the weights  $\{\mathbf{w}_n\}_{n \in [N]}$ . We also assume  $\mathbb{E}[a_n] = \mu_a \neq 0$ .

Assumption (A-b): the scaling coefficients  $\{b_m\}_{m \in [M]}$  are optimized in a compact set, i.e.  $|b_m| \leq B$ .

A few remarks on the assumptions are in order. First, the quantities  $\sigma_W, \mu_a, A$  and  $B$  are all numerical constants (independent of  $d, N, M$ ). Second, the assumption that  $\{\mathbf{w}_n\}_{n \in [N]}$  are i.i.d. is compatible with gradient descent training in the mean-field regime [13]–[16]. In fact, in this regime, the weights obtained from stochastic gradient descent are close to  $N$  i.i.d. particles distributed according to the solution of a certain non-linear partial differential equation [13], [17]. This perspective has been used to prove a number of properties of neural networks, including convergence [13], [15], [18], mode connectivity [19] and implicit bias [20].

The scaling  $1/\sqrt{d}$  ensures that the weights belong to the unit sphere  $\mathcal{S}^{d-1}$ .

### III. OPTIMIZATION OF SCALING COEFFICIENTS

We begin by arguing that the minimization over  $\{b_m\}_{m \in [M]}$  in (3) for a given  $\{\mathbf{v}_m\}_{m \in [M]}$  has a rather simple closed-form expression (Lemma 1). Next, we show that the optimization of the compressed weights  $\{\mathbf{v}_m\}_{m \in [M]}$  can be approached using the Hermite expansion of  $\sigma$ , when the input is Gaussian.

**Lemma 1** (Minimization over  $\{b_m\}_{m \in [M]}$ ). *The optimal value of  $\mathbf{b}$  in (5) for fixed  $\{\mathbf{v}_m\}_{m \in [M]}$  is*

$$\mathbf{b}^*(G_{VV}) = \frac{M}{N} G_{VV}^+ G_{VW} \mathbf{a} = M G_{VV}^+ \mathbf{s}. \quad (6)$$

Furthermore, when replacing the solution of (6) into (5), the loss is given by

$$L(\mathbf{V}, \mathbf{W})|_{\mathbf{b}=(6)} = \frac{1}{N^2} \mathbf{a}^\top G_{WW} \mathbf{a} - \mathbf{s}^\top G_{VV}^+ \mathbf{s}. \quad (7)$$

*Proof.* Given any set of unit-norm vectors  $\{\mathbf{v}_m\}_{m \in [M]}$  in (5), the loss is a quadratic (hence convex) program in  $\{b_m\}_{m \in [M]}$ . Thus, the optimal value can be found by setting the gradient  $\nabla_{\mathbf{b}} L$  to 0, which readily gives (6). By plugging (6) into (5), we also obtain (7).  $\square$

We note that, since by definition the loss is  $\geq 0$ ,  $\mathbf{s}$  always lies in the image of  $G_{VV}$ , justifying the use of the Moore-Penrose pseudo-inverse. In fact, if there exists  $\mathbf{k} \in \text{kernel}(G_{VV})$  such that  $\langle \mathbf{k}, \mathbf{s} \rangle \neq 0$ , then the loss evaluated at  $\mathbf{b} = \eta \mathbf{k}$  is

$$\frac{1}{N^2} \mathbf{a}^\top G_{WW} \mathbf{a} - \eta \frac{2}{M} \mathbf{k}^\top \mathbf{s} + \frac{\eta^2}{M^2} \mathbf{k}^\top G_{VV} \mathbf{k} = C - C' \eta,$$

which can be taken to  $\pm\infty$  by taking  $\eta$  to  $\pm\infty$  depending on the sign of  $C'$ .

**Lemma 2** ([21]). *The function  $g(\mathbf{u}, \mathbf{v})$  in (4a) is a function of  $\alpha = \langle \mathbf{u}, \mathbf{v} \rangle$ , which can be expressed as*

$$g(\mathbf{u}, \mathbf{v}) = g(\alpha) = \frac{1}{2\pi} \left( \sqrt{1 - \alpha^2} + \alpha(\pi - \arccos(\alpha)) \right). \quad (8)$$

Additionally,  $g(\alpha)$  admits the well-defined Taylor expansion

$$g(\alpha) = \frac{1}{2\pi} + \frac{1}{4}\alpha + \sum_{k \geq 1} \frac{1}{2\pi} \frac{((2k-3)!!)^2}{(2k)!} \alpha^{2k}. \quad (9)$$

*Proof.* The expression in (8) follows from [21]. The expression in (9) is derived through some rather straightforward manipulations. Here, the Taylor coefficients of  $g$  are the squared Hermite coefficients of  $\sigma$ , see [22, Section 11.2].  $\blacksquare$

We note that, for any  $\sigma \in L^2(e^{-w^2/2})$ ,  $g(\mathbf{u}, \mathbf{v})$  is a function of  $\alpha = \langle \mathbf{u}, \mathbf{v} \rangle$ , as long as the input distribution is invariant under rotations.

We note that the expression in (8) has a missing factor of 1/2, which we corrected.

$\sigma \in L^2(e^{-w^2/2})$  means that the integral  $\int_{\mathbb{R}} \sigma^2(w) e^{-w^2/2} dt$  is finite, which ensures that the Taylor expansion of  $g$  is well-defined.

### IV. LIMIT LOSS AND LIMIT OBJECTIVE

By solving the minimization over  $\{b_m\}_{m \in [M]}$ , we have reduced the problem to optimizing (7) over  $\{\mathbf{v}_m\}_{m \in [M]}$ . Note that the vectors  $\{\mathbf{v}_m\}_{m \in [M]}$  appear both in  $G_{VV}^+$  and in  $\mathbf{s}$ . Next, we show that, as  $N, d \gg 1$ , the dependence of  $\mathbf{s}$  on  $\{\mathbf{v}_m\}_{m \in [M]}$  can be essentially dropped. More specifically, Theorem 1 proves that the loss (5) is close to the *limit loss*

$$\tilde{L}(\mathbf{V}, \mathbf{W}) = \frac{1}{N^2} \mathbf{a}^\top G_{WW} \mathbf{a} - \frac{2}{M} \frac{\mu_a}{2\pi} \mathbf{b}^\top \mathbf{1} + \frac{1}{M^2} \mathbf{b}^\top G_{VV} \mathbf{b}, \quad (10)$$

obtained by plugging  $\mathbf{s} = \frac{\mu_a}{2\pi} \mathbf{1}$  into (5). To prove the claim, the idea is to exploit the Taylor expansion (9) of  $g$ , and show that only the zero-th order term has an impact on  $\mathbf{s}$  (as  $N, d \gg 1$ ). To do so, we begin by deriving a bound on the magnitude of the linear term coming from the expansion in (9).

**Lemma 3** (Controlling the linear term). *Let the assumptions (A-w)-(A-a) hold. Then, we have that*

$$\sup_{\mathbf{v} \in \mathcal{S}^{d-1}} \left| \frac{1}{N} \sum_{n \in [N]} a_n \langle \mathbf{v}, \mathbf{w}_n \rangle \right| \leq \frac{t A \sigma_W}{\sqrt{N}},$$

with probability at least  $1 - 2 \exp(-t^2/16)$ .

*Proof.* We first note that

$$\sup_{\mathbf{v} \in \mathcal{S}^{d-1}} \left| \frac{1}{N} \sum_{n \in [N]} a_n \langle \mathbf{v}, \mathbf{w}_n \rangle \right| = \frac{1}{N} \left\| \sum_{n \in [N]} a_n \mathbf{w}_n \right\|_2.$$

Since  $\{\mathbf{w}_n\}_{n \in [N]}$  are zero-mean sub-Gaussian vectors with norm  $\sigma_W/\sqrt{d}$ ,  $\mathbf{w}_{\text{avg}} := \frac{1}{N} \sum_{n \in [N]} a_n \mathbf{w}_n$  is also a sub-Gaussian random vector with sub-Gaussian norm  $\|\mathbf{w}_{\text{avg}}\|_{\psi_2} \leq A \sigma_W / (\sqrt{Nd})$ . This can be seen by the following bound on the moment generating function: for any  $\mathbf{u} \in \mathcal{S}^{d-1}$ , it holds that, for any  $\lambda \in \mathbb{R}$ ,

$$\begin{aligned} \mathbb{E} \left[ e^{\lambda \mathbf{u}^\top \mathbf{w}_{\text{avg}}} \right] &= \prod_{n \in [N]} \mathbb{E}_{a_n, \mathbf{w}_n} \left[ e^{\lambda \frac{1}{N} a_n \mathbf{u}^\top \mathbf{w}_n} \right] \\ &\leq \prod_{n \in [N]} \mathbb{E}_{a_n} \left[ e^{\lambda^2 \frac{a_n^2}{N^2} \frac{\sigma_W^2}{d}} \right] \leq e^{\lambda^2 \frac{A^2}{N} \frac{\sigma_W^2}{d}}, \end{aligned} \quad (11)$$

where in the first inequality we use  $\|\mathbf{w}_n\|_{\psi_2} \leq \sigma_W/\sqrt{d}$  and Proposition 2.5.2 in [23], and in the second inequality we use that  $|a_n| \leq A$ . By [24, Lemma 1], we have that

$$\mathbb{P} \left[ \|\mathbf{w}_{\text{avg}}\|_2 \geq \frac{t A \sigma_W}{\sqrt{N}} \right] \leq 2e^{-\frac{t^2}{16}}, \quad (12)$$

which gives the desired result.  $\square$

Next, we bound the quadratic term of the expansion in (9).

**Lemma 4** (Controlling the quadratic term). *Let the assumptions (A-w)-(A-a) hold. Then, we have that*

$$\sup_{\mathbf{v} \in \mathcal{S}^{d-1}} \frac{1}{N} \sum_{n \in [N]} |a_n| \langle \mathbf{v}, \mathbf{w}_n \rangle^2 \leq CA \left( \frac{\sigma_W^2}{d} + \frac{1}{N} + \frac{1}{\sqrt{Nd}} \right), \quad (13)$$

with probability at least  $1 - 2 \exp(-d)$ , where  $C$  is a numerical constant.

*Proof.* Manipulating the LHS of (13), we have

$$\begin{aligned} \sup_{\mathbf{v} \in \mathcal{S}^{d-1}} \frac{1}{N} \sum_{n \in [N]} |a_n| \langle \mathbf{v}, \mathbf{w}_n \rangle^2 &\leq \sup_{\mathbf{v} \in \mathcal{S}^{d-1}} \frac{1}{N} \sum_{n \in [N]} A \langle \mathbf{v}, \mathbf{w}_n \rangle^2 \\ &\leq \sup_{\mathbf{v} \in \mathcal{S}^{d-1}} A \left| \frac{1}{N} \mathbf{v}^\top \sum_{n \in [N]} \mathbf{w}_n \mathbf{w}_n^\top \mathbf{v} \right| \leq \frac{A}{d} \left\| \frac{1}{N} \mathbf{W} \mathbf{W}^\top \right\|_{\text{op}}, \end{aligned} \quad (14)$$

where in the first inequality we use that  $|a_n| \leq A$ , and in the last line we have defined  $\mathbf{W} := [\sqrt{d} \mathbf{w}_1, \dots, \sqrt{d} \mathbf{w}_N]$ .

To bound the operator norm of  $\frac{1}{N} \mathbf{W} \mathbf{W}^\top$ , let  $\Sigma$  be the second moment matrix of  $\sqrt{d} \mathbf{w}_n$ , i.e.,  $\Sigma := d \mathbb{E}[\mathbf{w}_n \mathbf{w}_n^\top]$ . Then, by [25, Remark 5.40], we have that

$$\left\| \frac{1}{N} \mathbf{W} \mathbf{W}^\top \right\|_{\text{op}} \leq \|\Sigma\|_{\text{op}} + \max(\delta, \delta^2), \quad (15)$$

with probability at least  $1 - 2 \exp(-c_1 t^2)$ , where  $\delta = C_1 \sqrt{d/N} + t/\sqrt{N}$  and  $c_1, C_1$  are numerical constants. To bound  $\|\Sigma\|_{\text{op}}$ , let  $\mathbf{u}$  be the unitary eigenvector associated to the maximum eigenvalue of  $\Sigma$ . Then,

$$\|\Sigma\|_{\text{op}} = \mathbf{u}^\top \Sigma \mathbf{u} = d \mathbb{E}[\mathbf{u}^\top \mathbf{w}_n \mathbf{w}_n^\top \mathbf{u}] = d \mathbb{E}[(\mathbf{u}^\top \mathbf{w}_n)^2]. \quad (16)$$

Furthermore, we have that

$$\begin{aligned} \|\mathbf{w}_n\|_{\psi_2} &:= \sup_{\mathbf{u}' : \|\mathbf{u}'\|_2=1} \|(\mathbf{u}')^\top \mathbf{w}_n\|_{\psi_2} \\ &\geq \|\mathbf{u}^\top \mathbf{w}_n\|_{\psi_2} \geq \frac{1}{C_2} \sqrt{\mathbb{E}[(\mathbf{u}^\top \mathbf{w}_n)^2]}, \end{aligned} \quad (17)$$

where  $C_2$  is a numerical constant, and the last inequality comes from Eq. (2.15) of [23]. By combining (16) and (17) with the fact that  $\|\mathbf{w}_n\|_{\psi_2} \leq \sigma_W/\sqrt{d}$ , we conclude that

$$\|\Sigma\|_{\text{op}} \leq C_2^2 \sigma_W^2. \quad (18)$$

Hence, the desired result follows by taking  $t = d/\sqrt{c_1}$  in (15) and using (18).  $\square$

At this point, we are ready to prove our main result.

**Theorem 1** (Convergence to limit loss). *Let the assumptions (A-w)-(A-a) hold. Then, we have that*

$$\sup_{\substack{\{\mathbf{v}_m\}_{m \in [M]} \\ \mathbf{v}_m \in \mathcal{S}^{d-1}}} \left| [\mathbf{s}]_i - \frac{\mu_a}{2\pi} \right| \leq \text{err}(N, d, A, \sigma_W, t), \quad (19)$$

with probability at least  $1 - 4e^{-t^2/16} - 2e^{-d}$ , where

$$\text{err}(N, d, A, \sigma_W, t) := CA \left( \frac{\sigma_W^2}{d} + \frac{t(1 + \sigma_W)}{\sqrt{N}} \right), \quad (20)$$

and  $C$  is a numerical constant. Furthermore, by assuming also (A-b), we have that, with the same probability,

$$\sup_{\substack{\{\mathbf{v}_m\}_{m \in [M]} \\ \mathbf{v}_m \in \mathcal{S}^{d-1}}} |L(\mathbf{V}, \mathbf{W}) - \tilde{L}(\mathbf{V}, \mathbf{W})| \leq B M \text{err}(N, d, A, \sigma_W, t), \quad (21)$$

where  $L(\mathbf{V}, \mathbf{W})$  and  $\tilde{L}(\mathbf{V}, \mathbf{W})$  are defined in (5) and (10), respectively.

*Proof.* By plugging the Taylor expansion of  $g$  (cf. (9)) into the definition  $\mathbf{s} := \frac{1}{N} G_{VW} \mathbf{a}$ , we have that, for  $i \in [M]$ ,

$$\begin{aligned} [\mathbf{s}]_i &= \frac{1}{N} \sum_{n \in [N]} \frac{a_n}{2\pi} + \frac{1}{N} \sum_{n \in [N]} \frac{1}{4} a_n \langle \mathbf{v}_i, \mathbf{w}_n \rangle \\ &\quad + \frac{1}{N} \sum_{n \in [N]} \sum_{k \geq 1} a_n c_k \langle \mathbf{v}_i, \mathbf{w}_n \rangle^{2k}, \end{aligned} \quad (22)$$

where  $c_k = \frac{1}{2\pi} \frac{((2k-3)!!)^2}{k!}$ . Hence,

$$\begin{aligned} \left| [\mathbf{s}]_i - \frac{\mu_a}{2\pi} \right| &\leq \left| \frac{1}{N} \sum_{n \in [N]} \frac{a_n}{2\pi} - \frac{\mu_a}{2\pi} \right| + \left| \frac{1}{N} \sum_{n \in [N]} \frac{1}{4} a_n \langle \mathbf{v}_i, \mathbf{w}_n \rangle \right| \\ &\quad + \left| \frac{1}{N} \sum_{n \in [N]} \sum_{k \geq 1} a_n c_k \langle \mathbf{v}_i, \mathbf{w}_n \rangle^{2k} \right| := T_1 + T_2 + T_3. \end{aligned} \quad (23)$$

Using Hoeffding inequality for bounded variables, we get

$$\mathbb{P} \left[ T_1 \geq \frac{tA}{2\pi\sqrt{N}} \right] \leq 2e^{-\frac{t^2}{2}}. \quad (24)$$

Furthermore, using Lemma 3, we have

$$\mathbb{P} \left[ \sup_{\mathbf{v}_i \in \mathcal{S}^{d-1}} T_2 \geq \frac{tA\sigma_W}{4\sqrt{N}} \right] \leq 2e^{-\frac{t^2}{16}}. \quad (25)$$

For the last term, we first note that

$$T_3 \leq \frac{1}{N} \sum_{n \in [N]} \sum_{k \geq 1} |a_n| c_k \langle \mathbf{v}_i, \mathbf{w}_n \rangle^2 \leq \frac{C}{N} \sum_{n \in [N]} |a_n| \langle \mathbf{v}_i, \mathbf{w}_n \rangle^2, \quad (26)$$

where  $C$  denotes a numerical constant. Here, in the first inequality we use that  $c_k \geq 0$  for all  $k \geq 1$  and that  $|\langle \mathbf{v}_i, \mathbf{w}_n \rangle| \leq 1$  since  $\mathbf{v}_i, \mathbf{w}_n \in \mathcal{S}^{d-1}$ ; and in the second equality we use that  $\sum_{k \geq 1} c_k$  is finite, since  $\sigma \in L^2(e^{-w^2/2})$ . Thus, we can use Lemma 4 to give a uniform bound on the RHS of (26). By combining this with (24) and (25), after some simplifications we obtain (19).

Recall from assumption (A-b) that  $|b_m| \leq B$ . Then, an immediate consequence of (19) is that

$$\sup_{\substack{\{\mathbf{v}_m\}_{m \in [M]} \\ \mathbf{v}_m \in \mathcal{S}^{d-1}}} \left| \mathbf{b}^\top \mathbf{s} - \mathbf{b}^\top \frac{\mu_a}{2\pi} \mathbf{1} \right| \leq M B \text{err}(N, d, A, \sigma_W, t), \quad (27)$$

which readily gives (21).  $\blacksquare$

Theorem 1 shows that, if we optimize the limit loss (10) instead of the original loss (5), we suffer at most an additive error which scales as  $1/\sqrt{N} + 1/d$ . The same result can be obtained for any  $\sigma \in L^2(e^{-w^2/2})$ , as long as the zero-th, first and second Hermite coefficients are non-zero. If at least one of these coefficients is zero, we still expect convergence to the limit loss, but with a different additive error term.

It is uniform in the sense that it upper bounds  $\sup_{\mathbf{v}_i \in \mathcal{S}^{d-1}} T_3$ .

By the same argument of Lemma 1, the optimal value of  $\mathbf{b}$  in (10) for a fixed  $G_{VV}$  is

$$\tilde{\mathbf{b}}^*(G_{VV}) = \frac{M\mu_a}{2\pi} G_{VV}^+ \mathbf{1}. \quad (28)$$

Furthermore, when replacing the solution of (28) into (10), the loss is given by

$$\tilde{\mathcal{L}}(\mathbf{V}, \mathbf{W}) \Big|_{\mathbf{b}=(28)} = \frac{1}{N^2} \mathbf{a}^\top G_{WW} \mathbf{a} - \frac{\mu_a^2}{4\pi^2} \mathbf{1}^\top G_{VV}^+ \mathbf{1}. \quad (29)$$

This is equivalent to maximizing

$$\tilde{\mathcal{R}}(\mathbf{V}) = \mathbf{1}^\top G_{VV}^+ \mathbf{1}. \quad (30)$$

We refer to (29) as the *limit loss* and to  $\tilde{\mathcal{R}}(\mathbf{V})$  as the *limit objective*. Note that, in (30), we have removed the dependency on the target network  $\mathbf{W}$ , as the limit objective no longer depend on the target network. We also remark that our bound for the approximation gap in (21) worsens as  $M$  increases. This is to be expected since, when  $M$  scales e.g. linearly with  $N$ , the weights of the compressed network should depend on the realization of the target network.

## V. EQUIANGULAR TIGHT FRAME (ETF) CONJECTURE

We conjecture that the limit objective (30) is maximized when the weights of  $\mathbf{V}$  form an ETF, i.e.,  $\mathbf{v}_i^\top \mathbf{v}_j = -1/(M-1)$  for all  $i \neq j$ . More precisely, we conjecture that *any* ETF achieves the maximum in (30): optimizing the orientation of the ETF results in a reduction of the compression loss bounded as in (21) – with high probability. We indicate the value of (30) when  $\{\mathbf{v}_m\}$  is an ETF as  $\tilde{\mathcal{R}}_{\text{ETF}}$  and the corresponding compressed network as  $\mathbf{V}_{\text{ETF}}$ . We note that the assumption (A-b) is satisfied when  $\mathbf{b}$  is given by (28) and the weights of  $\mathbf{V}$  form an ETF. We compute the value of  $\tilde{\mathcal{R}}_{\text{ETF}}$  in Lemma 5, and prove the conjecture in the  $M = 2$  case in Lemma 6.

**Lemma 5** (ETF limiting objective). *When the weights of  $\mathbf{V}$  form an ETF, we have that*

$$\tilde{\mathcal{R}}(\mathbf{V}) = \tilde{\mathcal{R}}_{\text{ETF}} = \frac{M}{g(1) + (M-1)g\left(-\frac{1}{M-1}\right)}, \quad (31)$$

where  $g(\alpha)$  is given by (9).

*Proof:* Define  $c_1 = g(-1/(M-1))$  and  $c_2 = g(1) - g(-1/(M-1))$ . Then,  $g(\mathbf{v}_i^\top \mathbf{v}_j) = c_1$  if  $i \neq j$ , and  $g(\mathbf{v}_i^\top \mathbf{v}_j) = c_1 + c_2$  otherwise. Hence,  $G_{VV} = c_1 \mathbf{1}\mathbf{1}^\top + c_2 \mathbf{I}$  and, by using the Sherman-Morrison formula, (31) follows. ■

**Lemma 6** (Case  $M = 2$ ). *For  $M = 2$ , an ETF is the optimal solution of the optimization in (30).*

*Proof:* To see this, let us rewrite (30) as

$$2\mathbf{1}^\top \begin{bmatrix} 1 & g_{12} \\ g_{12} & 1 \end{bmatrix}^{-1} \mathbf{1} = \frac{4(1-g_{12})}{1-g_{12}^2} = \frac{4}{1+g_{12}}, \quad (32)$$

where  $g_{12} = 2g(\langle \mathbf{v}_1, \mathbf{v}_2 \rangle)$ . Since  $g$  in (9) is an increasing function in  $\alpha$ , the maximum of the limit objective happens when  $\mathbf{v}_1 = -\mathbf{v}_2$ , which is an ETF. ■

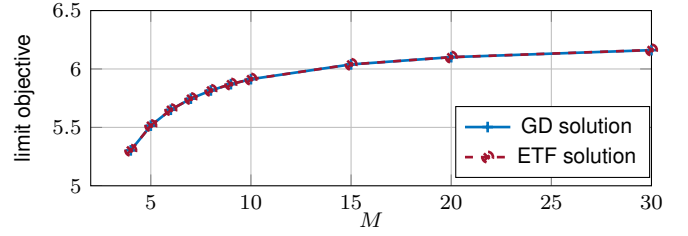


Fig. 2. Limit objective as estimated through GD and as computed at ETF.

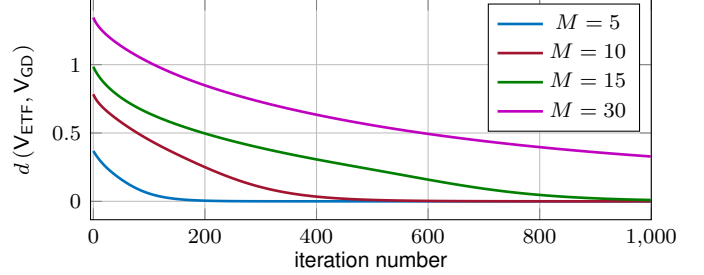


Fig. 3. Distance between the GD solution and the ETF solution, as in (33).

In the rest of the section, we provide numerical results giving a rather strong indication that the ETF maximizes (30). First, in Fig. 2, we compare (i) the value of the limit objective attained by the ETF (cf. Lemma 5) and (ii) the limit objective obtained after running  $10^3$  iteration of gradient descent (GD), as a function of  $M$ . These two values coincide up to the 12<sup>th</sup> decimal place for  $M$  between 5 and 30.

To further investigate the GD solution, let us define the distance between two networks  $\mathbf{V}$  and  $\mathbf{V}'$  as

$$d(\mathbf{V}, \mathbf{V}') = \|G_{VV} - G_{V'V'}\|_F. \quad (33)$$

In Fig. 3, we plot  $d(\mathbf{V}_{\text{ETF}}, \mathbf{V}_{\text{GD}})$ , i.e., the distance between the ETF compressed network,  $\mathbf{V}_{\text{ETF}}$ , and the network compressed using gradient descent,  $\mathbf{V}_{\text{GD}}$ , as a function of the iteration number and for various values of  $M$ . We note that the convergence of GD to the ETF solution is rather stable and constant with the number of iterations. We also observe that the convergence rate of GD decreases as  $M$  grows large.

Finally, in Fig. 4, we plot the variability of the convergence behaviour across multiple GD initializations.

## VI. CONCLUSION

In this paper, the compression of a two-layer neural network with  $N$  neurons to a network with  $M$  neurons is investigated. An asymptotic expression for the compression loss is obtained for the case in which the input features are Gaussian and the

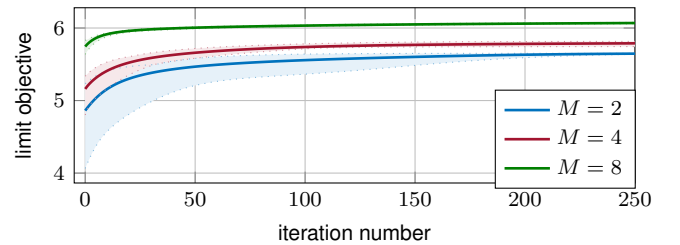


Fig. 4. Convergence of GD as a function of the iteration number. The boundaries of the shaded area indicate the minimum and maximum of the objective across 10 independent initializations.

target weights are i.i.d. sub-Gaussian. This mean-field view allow to significantly simplify the optimization problem, as the limit objective depends only on  $M$  (and not on  $N \gg M$ ). Numerical simulations suggest that, for a ReLU activation, the optimal structure of the compressed network is the one in which weights lie on an equiangular tight frame, while the orientation and the scaling of the neurons is obtained from the parameters of the original network. Proving this claim is left as an open problem. Interesting avenues for future research also consist in understanding the class of activations for which the ETF conjecture holds and extending the current results to deep networks.

## REFERENCES

- [1] T. Gale, E. Elsen, and S. Hooker, “The state of sparsity in deep neural networks,” *arXiv preprint arXiv:1902.09574*, 2019.
- [2] T. Hoeffler, D. Alistarh, T. Ben-Nun, N. Dryden, and A. Peste, “Sparsity in deep learning: Pruning and growth for efficient inference and training in neural networks,” *Journal of Machine Learning Research*, vol. 22, no. 241, pp. 1–124, 2021.
- [3] Y. LeCun, J. Denker, and S. Solla, “Optimal brain damage,” in *Advances in Neural Information Processing Systems*, vol. 2, 1989.
- [4] B. Hassibi and D. Stork, “Second order derivatives for network pruning: Optimal brain surgeon,” in *Advances in Neural Information Processing Systems*, vol. 5, 1992.
- [5] S. Han, J. Pool, J. Tran, and W. Dally, “Learning both weights and connections for efficient neural network,” *Advances in Neural Information Processing Systems*, vol. 28, 2015.
- [6] A. See, M.-T. Luong, and C. D. Manning, “Compression of neural machine translation models via pruning,” in *Proceedings of The 20th SIGNLL Conference on Computational Natural Language Learning*, 2016, pp. 291–301.
- [7] S. Narang, E. Elsen, G. Diamos, and S. Sengupta, “Exploring sparsity in recurrent neural networks,” *arXiv preprint arXiv:1704.05119*, 2017.
- [8] J. Frankle and M. Carbin, “The lottery ticket hypothesis: Finding sparse, trainable neural networks,” in *International Conference on Learning Representations*, 2018.
- [9] S. Han, X. Liu, H. Mao, J. Pu, A. Pedram, M. A. Horowitz, and W. J. Dally, “Eie: Efficient inference engine on compressed deep neural network,” *ACM SIGARCH Computer Architecture News*, vol. 44, no. 3, pp. 243–254, 2016.
- [10] M. Ye, C. Gong, L. Nie, D. Zhou, A. Klivans, and Q. Liu, “Good subnetworks provably exist: Pruning via greedy forward selection,” in *International Conference on Machine Learning*, 2020, pp. 10 820–10 830.
- [11] W. Kim, S. Kim, M. Park, and G. Jeon, “Neuron merging: Compensating for pruned neurons,” *Advances in Neural Information Processing Systems*, vol. 33, pp. 585–595, 2020.
- [12] M. Mondelli and A. Montanari, “On the connection between learning two-layer neural networks and tensor decomposition,” in *The 22nd International Conference on Artificial Intelligence and Statistics*, 2019, pp. 1051–1060.
- [13] S. Mei, A. Montanari, and P.-M. Nguyen, “A mean field view of the landscape of two-layer neural networks,” *Proceedings of the National Academy of Sciences*, vol. 115, no. 33, pp. E7665–E7671, 2018.
- [14] G. M. Rotskoff and E. Vanden-Eijnden, “Neural networks as interacting particle systems: Asymptotic convexity of the loss landscape and universal scaling of the approximation error,” in *Advances in Neural Information Processing Systems*, vol. 32, 2018.
- [15] L. Chizat and F. Bach, “On the global convergence of gradient descent for over-parameterized models using optimal transport,” in *Advances in Neural Information Processing Systems*, vol. 32, 2018.
- [16] J. Sirignano and K. Spiliopoulos, “Mean field analysis of neural networks: A law of large numbers,” *SIAM Journal on Applied Mathematics*, vol. 80, no. 2, pp. 725–752, 2020.
- [17] S. Mei, T. Misiakiewicz, and A. Montanari, “Mean-field theory of two-layers neural networks: Dimension-free bounds and kernel limit,” in *Conference on Learning Theory*, 2019, pp. 2388–2464.
- [18] A. Javanmard, M. Mondelli, and A. Montanari, “Analysis of a two-layer neural network via displacement convexity,” *The Annals of Statistics*, vol. 48, no. 6, pp. 3619–3642, 2020.
- [19] A. Shevchenko and M. Mondelli, “Landscape connectivity and dropout stability of sgd solutions for over-parameterized neural networks,” in *International Conference on Machine Learning*, 2020, pp. 8773–8784.
- [20] A. Shevchenko, V. Kungurtsev, and M. Mondelli, “Mean-field analysis of piecewise linear solutions for wide ReLU networks,” *Journal of Machine Learning Research*, 2022.
- [21] V. Dutordoir, J. Hensman, M. van der Wilk, C. H. Ek, Z. Ghahramani, and N. Durrande, “Deep neural networks as point estimates for deep Gaussian processes,” *Advances in Neural Information Processing Systems*, vol. 34, 2021.
- [22] R. O’Donnell, *Analysis of boolean functions*. Cambridge University Press, 2014.
- [23] R. Vershynin, *High-dimensional probability: An introduction with applications in data science*. Cambridge university press, 2018.
- [24] C. Jin, P. Netrapalli, R. Ge, S. M. Kakade, and M. I. Jordan, “A short note on concentration inequalities for random vectors with subgaussian norm,” *arXiv preprint arXiv:1902.03736*, 2019.
- [25] R. Vershynin, “Introduction to the non-asymptotic analysis of random matrices,” *arXiv preprint arXiv:1011.3027*, 2010.