

Probing Commonsense Knowledge in Pre-trained Language Models with Sense-level Precision and Expanded Vocabulary

Daniel Loureiro^{◇♣}, Alípio Mário Jorge[♣]

[◇] Cardiff NLP, School of Computer Science and Informatics, Cardiff University, UK

[♣]LIAAD - INESC TEC, Faculty of Sciences, University of Porto, Portugal

boucanovaloureiro@cardiff.ac.uk, amjorge@fc.up.pt

Abstract

Progress on commonsense reasoning is usually measured from performance improvements on Question Answering tasks designed to require commonsense knowledge. However, fine-tuning large Language Models (LMs) on these specific tasks does not directly evaluate commonsense learned during pre-training. The most direct assessments of commonsense knowledge in pre-trained LMs are arguably cloze-style tasks targeting commonsense assertions (e.g., A pen is used for [MASK]). However, this approach is restricted by the LM’s vocabulary available for masked predictions, and its precision is subject to the context provided by the assertion. In this work, we present a method for enriching LMs with a grounded sense inventory (i.e., WordNet) available at the vocabulary level, without further training. This modification augments the prediction space of cloze-style prompts to the size of a large ontology while enabling finer-grained (sense-level) queries and predictions. In order to evaluate LMs with higher precision, we propose SenseLAMA, a cloze-style task featuring verbalized relations from disambiguated triples sourced from WordNet, WikiData, and ConceptNet. Applying our method to BERT, producing a WordNet-enriched version named SynBERT, we find that LMs can learn non-trivial commonsense knowledge from self-supervision, covering numerous relations, and more effectively than comparable similarity-based approaches.

1 Introduction

A relatively new direction for benchmarking Language Models (LMs) are tasks designed to require commonsense knowledge and reasoning. These tasks usually target commonsense concepts under a Question Answering (QA) format (Mihaylov et al., 2018; Talmor et al., 2019; Bisk et al., 2020; Nie et al., 2020) and follow scaling trends. Increasing the model’s parameters leads to improved results,

specially in few-shot learning settings (Chowdhery et al., 2022). Hybrid methods, particularly those fusing LMs with Graph Neural Networks, have shown that Commonsense Knowledge Graphs (CKGs) can help improve performance on these tasks (Xu et al., 2021; Yasunaga et al., 2021; Zhang et al., 2022). The results obtained by these works, using relatively small LMs, suggest that CKGs can be an alternative (or complement) to increasing model size, with the added benefit of supporting more interpretable results.

Nevertheless, the QA approach provides only an indirect measure of a pre-trained model’s ability to understand and reason with commonsense concepts. The models attaining best results on these tasks are often too large for thorough analysis, and the QA format can promote shallow learning from annotation artifacts or spurious cues unrelated to commonsense (Branco et al., 2021).

There are more direct ways of evaluating commonsense knowledge in LMs, such as scoring generated triples (Davison et al., 2019), infilling cloze-style statements (Petroni et al., 2019), or fine-tuning for explicit generation of commonsense statements (Bosselut et al., 2019). However, these approaches are either limited by each LM’s particular vocabulary or biased by the available training data (Wang et al., 2021). Additionally, existing tasks and methods do not target grounded representations, which is essential for high-precision CKGs (Tandon et al., 2014; Dalvi Mishra et al., 2017), and context-independent reference (Eyal et al., 2022).

Commonsense tasks and approaches typically leverage ConceptNet (Speer et al., 2017), a popular CKG built from an extensive crowdsourcing effort (Storks et al., 2019). Although ConceptNet is arguably the most popular CKG available, its nodes are composed of free-form text rather than disambiguated (canonical) representations, allowing for misleading associations and aggravating the network’s sparsity (Li et al., 2016; Jastrzēb-

ski et al., 2018; Wang et al., 2020). The WordNet (Miller, 1992) sense inventory is a natural choice for a set of ontologically grounded concept-level representations, having been curated by experts over decades and spanning various knowledge domains and syntactic categories of the English language. Recent developments on WSD and Uninformed Sense Matching (USM) have shown that WordNet senses can be mapped to naturally occurring sentences with high precision (Loureiro et al., 2022), including at higher-abstraction levels (e.g., ‘Marlon Brando’ to actor_n¹). WordNet’s utility for commonsense tasks is limited by its narrow set of relations, focused on lexical relations (mostly hypernymy). However, its smaller size, compared to WikiData (Vrandečić and Krötzsch, 2014) or BabelNet (Navigli and Ponzetto, 2012), for example, also presents an opportunity for effective expansion with reduced sparsity, which is important for symbolic reasoning (Huang et al., 2021).

In this work, we propose that a LM augmented with explicit sense-level representations (see Figure 1) may present a solution for precise evaluation of commonsense knowledge learned during pre-training that is not limited by the LM’s vocabulary. Additionally, we explore how this enriched model can be used for grounded commonsense relation extraction towards precise and unbiased (w.r.t. commonsense training data) CKG construction that hybrid approaches may use. Considering there is currently no set of grounded assertions available to assess progress in this direction, we propose a cloze-style probing task targeting specific senses and commonsense relations, inspired by Petroni et al. (2019). Our contributions¹ are the following:

- A BERT² model with 117k new sense-specific embeddings added to its vocabulary, based on the model’s own internal states (SynBERT).
- The SenseLAMA probing task targeting wide-ranging and precise commonsense – based on WordNet, WikiData, and ConceptNet.
- Analyses on the impact of different input types for eliciting accurate commonsense knowledge from BERT.
- A new CKG grounded on WordNet with 23k unseen triples over 18 commonsense relations (e.g., *UsedFor*) generated by prompting.

¹<https://github.com/danlou/synbert>

²While we focus on BERT and WordNet, our methods are broadly applicable to LMs and alternative representations.

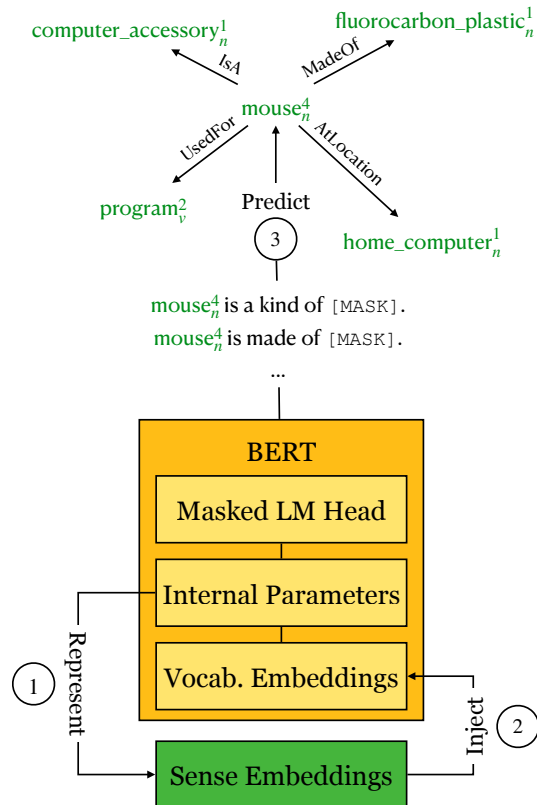


Figure 1: Our 3-step method for extracting unsupervised commonsense relations between concepts (i.e., word senses) from pre-trained language models. Relations are expressed as verbalizations that may be exchanged to target any other property of interest.

2 Related Work

Large LMs have featured prominently in the latest efforts to build richer and more accurate CKGs. COMET (Hwang et al., 2021) is a generative model based on BART (Lewis et al., 2020) trained on ConceptNet and ATOMIC (Sap et al., 2019) and proven capable of producing novel accurate triples for challenging relation types, such as *HinderedBy*. More recently, West et al. (2021) have proposed ATOMIC-10x, which leverages generated text from GPT-3 (Brown et al., 2020) in combination with a critic model to create the largest and most accurate semi-automatically constructed CKG. This accuracy was determined using both qualitative human ratings and quantitative measures. However, these works are primarily concerned with extracting large CKGs using fine-tuned or distilled LMs, and do not focus on directly evaluating the CSK learned during pre-training. Additionally, these works do not target grounded representations, considering only relations between free-text nodes, similarly to ConceptNet.

Addressing both disambiguated representations and sparsity resulting from free-text redundancy, WebChild (Tandon et al., 2014) proposes a CKG, grounded on WordNet senses, assembled from label propagation and pattern matching on Web corpora. WebChild features a large CKG (over 4M triples), but it predates large contextual LMs and the ensuing progress in WSD, making this resource unreliable by current standards. Recent works on CKGs also focus on other aspects besides size and accuracy, such as salience (Chalier et al., 2020) or alternatives to triples (Nguyen et al., 2021).

Our work is most related to LAMA (Petroni et al., 2019), which compiles masked assertions based on triples from ConceptNet and other resources, and measures how many triples can be accurately recovered when masking the object term. However, LAMA was designed for single-token masked prediction based on the intersection of the subword or byte-level token vocabularies used by the particular set of LMs considered in that work³. Consequently, LAMA is limited by design to a total of 21k prediction candidates.

LAMA is an important early result of LM probing, but besides the previously mentioned technical limitations, its findings have also been challenged in later works. Kassner and Schütze (2020) demonstrated that LMs are susceptible to mispriming and often unable to handle negation. Poerner et al. (2020) further showed that LMs could be biased by the surface form of entity names. Moreover, Dufter et al. (2021) found that static embeddings using a nearest neighbors (k -NN) approach can outperform LMs on the LAMA benchmark, casting doubt on the presumed advantages of large LMs for the task. Still, LAMA inspired others to use knowledge graphs (KGs) generated by LMs for intrinsic evaluation. Swamy et al. (2021) proposes extracting KGs from LMs to support interpretability and direct comparison between different LMs, or training stages. Aspillaga et al. (2021) follows a similar direction but proposes evaluating extracted KGs by concept relatedness, using hypernymy relations from WordNet and sense-tagged glosses.

Our approach overcomes the vocabulary limitations of LAMA while outperforming a comparable k -NN baseline. We also explore using extracted CKGs to evaluate LMs, alongside the generation of novel CKGs.

³This limitation stems from the fact that each word may be split into several tokens, whose number conditions predictions to words that match it, and is specific to each LM’s tokenizer.

3 SenseLAMA

We begin by describing our probing task to evaluate the commonsense knowledge learned during LM pre-training. SenseLAMA features verbalized relations⁴ between word senses from triples sourced from WordNet, WikiData, and ConceptNet. In the following, we describe how we compiled SenseLAMA using these resources, including mapping triples to specific WordNet senses (i.e., synsets).

Unlike other works (e.g., Feng et al., 2020), we do not merge similar relations. Since our approach is unsupervised, we do not benefit from additional examples per relation. Thus, we prefer preserving performance metrics specific to each source.

We use the core WordNet synsets, initially defined by Boyd-Graber et al. (2005), to create an easier subset of SenseLAMA. While the full WordNet covers over 117k synsets, core synsets are restricted to the 5k⁵ most frequently occurring word senses, dramatically reducing the number of prediction candidates. Thus, our ‘Core’ subset is derived from the ‘Full’ SenseLAMA, including only instances where both arguments of the triple belong to the set of core WordNet synsets. If this filter results in a relation with less than ten instances, that relation is discarded from the ‘Core’ subset. Table 1 reports counts for each source and relation in SenseLAMA.

WordNet Our base ontology already contains several relations which arguably fall under the scope of commonsense knowledge, such as hypernymy, meronymy, or antonymy. Since these relations already target synsets within WordNet, no additional mapping or disambiguation is required. Very frequent relations are capped at 10k samples.

WikiData This vast resource contains millions of triples for thousands of relations. We only consider a few select relations most associated with commonsense knowledge. Furthermore, we only admit triples for which the head and tail can be mapped to WordNet v3.0, either via the direct link available in WikiData’s item properties or through linking to BabelNet, which we map to WordNet using the mapping from Navigli and Ponzetto (2012). Alternatively, we map some triples via hapax linking (McCrae and Cillessen, 2021), when the triple’s arguments correspond to unambiguous words.

⁴Appendix A shows handcrafted templates used for WordNet and WikiData triples, following Petroni et al. (2019).

⁵Only 4,960 synsets can be mapped to WordNet v3.0.

ConceptNet We focus on the OMCS subset of ConceptNet, which includes full sentences collected through crowdsourcing, together with the corresponding triples. Using these sentences, we do not require templates and can provide systems with the same input presented to crowd workers. For each triple and sentence pair, we align the triple’s arguments to the sentence and disambiguate those words in context using ESC (Barba et al., 2021), a state-of-the-art WSD system. Triples that cannot be successfully aligned are discarded. For added precision, we constrain WSD according to each relation’s particular Part-of-Speech types, following Havasi et al. (2009).

Source/Relation	Core	Full
WordNet (WN)	1,757	41,237
<i>Hypernym</i>	1,288	10,000
<i>Holonym (Member)</i>	26	10,000
<i>Holonym (Part)</i>	145	7,832
<i>Antonym</i>	282	7,391
<i>Hypernym (Instance)</i>	-	5,356
<i>Meronym (Substance)</i>	16	658
WikiData (WD)	136	7,222
<i>P31 (Instance of)</i>	39	2,968
<i>P361 (Part of)</i>	45	1,367
<i>P366 (Use)</i>	27	763
<i>P186 (Made from)</i>	15	639
<i>P461 (Opposite of)</i>	10	501
<i>P737 (Influenced by)</i>	-	316
<i>P2283 (Uses)</i>	-	268
<i>P463 (Member of)</i>	-	183
<i>P1535 (Used by)</i>	-	151
<i>P279 (Subclass of)</i>	-	66
ConceptNet (CN)	1,032	3,541
<i>AtLocation</i>	328	1,004
<i>UsedFor</i>	162	661
<i>IsA</i>	120	512
<i>Causes</i>	38	224
<i>HasSubevent</i>	57	205
<i>HasPrerequisite</i>	50	165
<i>HasProperty</i>	47	157
<i>CapableOf</i>	48	123
<i>MotivatedByGoal</i>	37	104
<i>HasA</i>	48	97
<i>PartOf</i>	33	80
<i>CausesDesire</i>	14	52
<i>ReceivesAction</i>	19	44
<i>MadeOf</i>	18	42
<i>Desires</i>	13	28
<i>CreatedBy</i>	-	17
<i>HasFirstSubevent</i>	-	14
<i>HasLastSubevent</i>	-	12
All	2,925	52,000

Table 1: SenseLAMA relation counts.

4 SynBERT

In this section, we cover the three steps employed to enrich LMs with sense embeddings: 1) Represent word senses from internal states; 2) Map and add sense embeddings to the LM’s vocabulary; 3) Adapt cloze-style assertions and predictions to extract grounded triples. See Figure 1 for an overview. Throughout this work, we use BERT-Large (Devlin et al., 2019) as our reference LM.

4.1 Sense Representation

For representing word senses with LMs, we follow Loureiro et al. (2022) and learn sense embeddings as centroids of contextual embeddings from sense-annotated corpora and glosses. We follow the recommendation of representing contextual embeddings with weighted pooling from all layers, using weights specific to the sense matching profile (i.e., LMMS SP-USM). We also average the embeddings from annotations with gloss embeddings (centroids of contextual embeddings for lemmas and tokens in each synset’s gloss). These sense embeddings are derived from a LM’s frozen parameters, relying exclusively on modeling capability learned during pre-training. These sense embeddings have demonstrated state-of-the-art performance across several sense-related tasks, without bias towards most frequent senses, as observed with fine-tuning approaches (Loureiro et al., 2021).

4.2 Mapping and Injecting Embeddings

Poerner et al. (2020) found that linear mapping was sufficient for high accuracy alignment between static embeddings (unrelated to BERT) and BERT’s vocabulary embeddings. We follow this approach since our sense embeddings are derived from BERT, making alignment theoretically more straightforward. In order to learn the linear mapping (using least-squares), we need tokens represented in both the LM’s vocabulary embedding space (i.e., input-space) and the alternate space defined by the weighted pooling of layers used to represent the sense embeddings. We obtain this by finding tokens in the LM’s vocabulary with more than 100 occurrences in Wikitext (Merity et al., 2016) and applying the same pooling used for sense representation to learn embeddings for those tokens in the alternate space. After mapping, sense embeddings are added to the LM’s vocabulary as special tokens, represented using a distinct format (<WN:synset>), similarly to Schick and Schütze (2020).

	IsA	Desires	MadeOf
BERT	A mouse is a kind of [MASK] . animal, rabbit, cat	A mouse wants to [MASK] . play, eat, talk	A mouse is made of [MASK] . wood, clay, bone
SynBERT	mouse-eared_bat _n ¹ , mouser _n ¹ , rabbit_ears _n ²	die _v ² , forage _v ² , feed _v ⁷	redwood _n ¹ , wood _n ¹ , yellowwood _n ¹
SynBERT	A mouse _n ¹ is a kind of [MASK] . rat _n ¹ , mouse-eared_bat _n ¹ , pocket_rat _n ¹	A mouse _n ¹ wants to [MASK] . forage _v ² , feed _v ⁷ , die _v ²	A mouse _n ¹ is made of [MASK] . round_bone _n ¹ , bone _n ¹ , leg _n ²
SynBERT	A mouse _n ⁴ is a kind of [MASK] . computer_keyboard _n ¹ , computer_accessory _n ¹ , computer_memory_unit _n ¹	A mouse _n ⁴ wants to [MASK] . move _v ¹³ , move _v ¹² , think _v ⁶	A mouse _n ⁴ is made of [MASK] . fluorocarbon_plastic _n ¹ , glass _n ¹ , wire_glass _n ¹
SynBERT	A mouse _n ³ is a kind of [MASK] . dummy _n ¹ , shy_person _n ¹ , small_person _n ¹	A mouse _n ³ wants to [MASK] . shop_talk _n ¹ , talk _n ³ , talk _n ²	A mouse _n ³ is made of [MASK] . redwood _n ¹ , ironwood _n ² , yellowwood _n ¹

Table 2: Top-3 masked predictions targeting ‘mouse’ using templates corresponding to the *IsA*, *Desires* and *MadeOf* relations. First row does not use special synset tokens in the input and shows predictions using BERT (ignoring stopwords) as well SynBERT (ignoring regular tokens). Next rows show predictions using special tokens corresponding to the 3 senses for ‘mouse’ available in WordNet. Their definitions are the following: mouse_n¹ - any of numerous small rodents typically resembling diminutive rats [...]; mouse_n⁴ - a hand-operated electronic device that controls the coordinates of a cursor on your computer screen [...]; mouse_n³ - person who is quiet or timid.

4.3 Extracting Triples

Triples are extracted using assertions relating a grounded word sense with a masked tail term (e.g., [pen_n¹, UsedFor, ?] → "A <WN:pen.n.01> can be used for [MASK]."). Regular tokens are discarded from the LM’s masked predictions⁶, and softmax normalization is performed after filtering so that prediction scores are distributed exclusively over grounded word senses. Our default setup⁷ prepends assertions with the head term’s gloss from WordNet for improved results (i.e., "<WN:synset> can be defined as : gloss . [SEP] assertion"). We refer to Table 2 for example predictions.

5 Experiments

In this section, we explore two applications for our method that motivated this work: 1) Evaluating commonsense knowledge learned during LM pre-training; 2) Extracting precise CKGs from LMs enriched with grounded word senses.

5.1 Probing with SenseLAMA

The SenseLAMA probe described in section 3 is used to evaluate the commonsense knowledge learned while pre-training LMs, through the adaptation described in section 4. The prediction methodology described in subsection 4.3 is used to obtain ranked predictions for tail terms masked in SenseLAMA. Performance is evaluated using ranking metrics, namely mean Precision @ k and Mean Reciprocal Rank (MRR). As with LAMA, many

⁶The head term is also removed from predictions.

⁷See subsection 6.1 for an ablation analysis.

instances admit various possible answers (1 to N). Therefore P@10 may be considered more representative of actual performance than P@1.

The complete results in Table 3 show that performance varies substantially by source and relation. It is interesting to note that for core synsets (i.e., frequent concepts), we find P@10 above 30% for most relations. Particular relation groups, such as *Holonym (Part)*, *P361 (Part of)* and *PartOf* show particularly high results (above 60% P@10), suggesting that extraction for these relation types could be reliable enough for some applications.

The Full set appears much more challenging, which is to be expected considering the 20x increase for the search space in this setting, along with several instances targeting rare concepts. While this setting is much less reliable, we still find that most relations can be accurately predicted from the top 1% of candidates (> 60% P@1000).

Out of 39 relations (Full set), the most challenging belong to ConceptNet, particularly *ReceivesAction*, *Desires*, *CausesDesire* and *HasSubevent*, supporting the claim that commonsense relations are harder to model by LMs than lexical relations.

5.2 Commonsense Knowledge Extraction

While it is possible to use the method presented in this work to exhaustively query LMs and rank predictions for every synset and relation, we take a simpler approach in this experiment. Considering that the ConceptNet subset of SenseLAMA includes higher quality assertions (not generated by templates), we use these to generate new query assertions by replacing the head terms with their

	Core (4,960 candidates)					Full (117,659 candidates)					
	P@1	P@3	P@10	P@100	MRR	P@1	P@3	P@10	P@100	P@1000	MRR
All	24.41	40.56	59.10	83.20	35.64	7.18	13.78	23.09	45.75	71.75	12.55
WordNet	31.25	49.80	69.10	87.82	43.46	7.78	14.75	24.26	46.39	71.84	13.34
<i>Hypernym</i>	29.04	45.96	66.15	86.10	40.77	8.31	17.24	30.77	59.17	82.74	15.65
<i>Holonym (Member)</i>	42.31	69.23	88.46	100.00	57.80	1.75	3.04	5.03	13.98	41.89	3.00
<i>Holonym (Part)</i>	34.48	60.69	80.69	92.41	50.20	13.97	25.93	40.63	67.89	88.15	22.91
<i>Antonym</i>	37.94	58.16	74.11	91.49	50.09	8.10	13.72	20.96	40.56	70.32	12.55
<i>Hypernym (Instance)</i>	-	-	-	-	-	9.19	18.09	30.08	61.24	86.45	16.35
<i>Meronym (Substance)</i>	43.75	81.25	81.25	100.00	59.14	2.43	6.23	12.46	33.13	65.50	6.00
WikiData	16.18	33.09	49.26	79.41	27.62	5.05	10.12	18.83	43.91	72.07	9.69
<i>P31 (Instance of)</i>	10.26	23.08	23.08	61.54	16.94	2.90	6.74	13.61	37.77	68.56	6.67
<i>P361 (Part of)</i>	15.56	35.56	62.22	82.22	30.26	8.71	16.17	27.21	55.89	79.37	14.86
<i>P366 (Use)</i>	14.81	25.93	48.15	88.89	24.80	4.06	9.70	19.27	42.07	64.74	9.00
<i>P186 (Made from)</i>	33.33	46.67	60.00	86.67	41.66	8.61	12.83	23.63	46.64	72.77	13.03
<i>P461 (Opposite of)</i>	20.00	60.00	80.00	100.00	43.91	8.98	18.36	30.34	60.28	81.24	16.35
<i>P737 (Influenced by)</i>	-	-	-	-	-	2.53	6.33	10.76	31.33	71.20	5.85
<i>P2283 (Uses)</i>	-	-	-	-	-	4.85	8.58	14.93	37.31	66.42	8.42
<i>P463 (Member of)</i>	-	-	-	-	-	1.64	2.73	15.30	40.44	86.34	5.51
<i>P1535 (Used by)</i>	-	-	-	-	-	0.66	3.97	11.92	41.06	72.85	4.53
<i>P279 (Subclass of)</i>	-	-	-	-	-	6.06	12.12	21.21	45.45	72.73	10.64
ConceptNet	13.86	25.87	43.51	75.78	23.38	4.55	9.88	18.07	42.11	70.06	9.23
<i>AtLocation</i>	14.02	25.91	46.95	79.27	24.24	4.98	10.56	19.82	45.82	76.10	10.09
<i>UsedFor</i>	7.41	16.67	36.42	75.93	16.04	3.18	8.17	15.13	38.88	69.59	7.48
<i>IsA</i>	27.50	43.33	62.50	87.50	38.56	7.42	13.67	27.34	59.38	83.59	13.61
<i>Causes</i>	5.26	23.68	34.21	65.79	16.56	2.68	6.25	12.05	27.68	54.91	5.84
<i>HasSubevent</i>	3.51	14.04	19.30	43.86	10.08	0.98	2.44	5.37	14.63	35.12	2.64
<i>HasPrerequisite</i>	4.00	16.00	26.00	78.00	13.16	3.64	8.48	13.94	41.21	71.52	7.35
<i>HasProperty</i>	4.26	14.89	38.30	76.60	14.65	2.55	5.10	9.55	29.30	63.69	5.21
<i>CapableOf</i>	8.33	18.75	33.33	54.17	16.09	2.44	7.32	13.82	30.08	51.22	6.48
<i>MotivatedByGoal</i>	29.73	51.35	67.57	89.19	43.59	6.73	20.19	29.81	63.46	80.77	15.66
<i>HasA</i>	16.67	27.08	41.67	81.25	24.35	11.34	16.49	23.71	48.45	79.38	16.07
<i>PartOf</i>	36.36	54.55	75.76	90.91	48.35	10.00	21.25	37.50	66.25	87.50	19.33
<i>CausesDesire</i>	0.00	7.14	28.57	78.57	7.61	0.00	1.92	5.77	30.77	65.38	2.44
<i>ReceivesAction</i>	0.00	0.00	10.53	31.58	3.43	0.00	0.00	0.00	6.82	20.45	0.19
<i>MadeOf</i>	44.44	50.00	61.11	100.00	51.52	9.52	30.95	33.33	47.62	80.95	19.34
<i>Desires</i>	7.69	15.38	23.08	46.15	12.15	0.00	3.57	3.57	25.00	46.43	1.92
<i>CreatedBy</i>	-	-	-	-	-	0.00	0.00	11.76	35.29	82.35	3.43
<i>HasFirstSubevent</i>	-	-	-	-	-	7.14	7.14	14.29	35.71	78.57	9.23
<i>HasLastSubevent</i>	-	-	-	-	-	0.00	0.00	16.67	33.33	58.33	2.38

Table 3: Complete results on the SenseLAMA probing task using BERT Large with LMMS SP-USM sense embeddings. Reporting Precision at k (P@k) and Mean Reciprocal Rank (MRR). Sorted by P@1 on the Full set.

co-hyponyms. This approach also reduces the chances of generating non-sensical queries (e.g., "A <WN:pen.n.01> desires [MASK]."), which would result from combinatorial generation. Keeping in mind that there is likely more than a single valid prediction for each assertion, we use a threshold to extract multiple triples from each assertion’s prediction distribution. This threshold is automatically determined as the median score assigned to correct predictions on the SenseLAMA (Full) probe.

This process generates 36,505 query assertions and 23,088 novel⁸ triples scoring above the threshold. This novel CKG, grounded on WordNet, covers 18 commonsense relations and reaches 9.2% of all synsets. See [Appendix B](#) for detailed statistics.

6 Analysis

The analyses reported in this section focus on the following comparisons: 1) Alternatives for representing triples as cloze-style assertions; 2) Verbalization against Nearest Neighbors; 3) Mapping embeddings or retaining geometry.

6.1 Triple Representation

For this analysis, we compare alternatives for representing triples as masked assertions, specifically using synsets (special tokens) instead of regular tokens (i.e., most frequent lemma⁹) and glosses (averaged with sense embeddings and prepended to the assertion). We also combine lemmas and synsets using the *slash* representation ([Schick and Schütze, 2020](#)), where the head term in the assertion is replaced with "*lemma* / <WN:synset>".

Results in [Table 4](#) show that the synset representation is more effective than lemmas, and while the combination of lemmas and synsets is better, using synsets exclusively provides slightly improved results. Glosses appear to have a substantial impact under all settings, but averaging gloss embeddings and prepending glosses shows the best results. These results also show that ConceptNet (CN) is not only the most challenging subset but also the least sensitive to these experimental choices. For completeness, [Appendix C](#) reports complete SenseLAMA results using sense embeddings (from annotated text) that have not been merged with gloss embeddings or used assertions prepended with the gloss for the head synset.

⁸Not part of the triples in SenseLAMA or its sources.

⁹Each synset may be associated to multiple lemmas. Frequencies obtained from wordfreq ([Speer et al., 2018](#)).

Token		Gloss		WN	WD	CN	ALL
Lem	Syn	Avg	Pre				
✓				19.74	17.32	16.52	18.49
✓		✓		20.79	16.62	17.40	19.40
✓			✓	36.70	27.12	22.33	31.19
✓		✓	✓	40.82	29.79	23.18	34.09
	✓			26.46	19.46	17.67	23.04
	✓	✓		30.39	20.72	18.60	25.78
	✓		✓	38.76	26.83	22.56	32.49
	✓	✓	✓	43.44	27.59	23.38	35.63
✓	✓			25.47	19.65	18.08	22.59
✓	✓	✓		27.44	20.70	19.13	24.20
✓	✓		✓	39.14	26.49	21.66	32.39
✓	✓	✓	✓	42.31	28.15	21.97	34.47

Table 4: MRR on SenseLAMA (Core) when representing lemmas (Lem) and/or synsets (Syn); averaging gloss embedding (Avg) and/or prepending the gloss (Pre).

6.2 Impact of Verbalization

[Dufter et al. \(2021\)](#) showed that a nearest neighbors (k -NN) baseline using static embeddings could outperform BERT on the LAMA probe under comparable settings. We run a similar experiment to verify whether the same conclusion may apply to our SenseLAMA probe and SynBERT model.

In our case, the sense embeddings (mapped) added to BERT’s vocabulary can be used as static embeddings. Bearing in mind that some sense embeddings from LMMS are inferred from hyponymy relations in WordNet (17.1% of senses, mostly rare), we also experiment with another set of BERT-based sense embeddings which are not derived from any relations ([ARES, Scarlini et al., 2020](#)). For a fair comparison, we do not prepend glosses for masked predictions.

As such, [Table 5](#) reports results using k -NN with sense embeddings, alongside using SynBERT with the verbalized queries (i.e., masked assertions) provided with SenseLAMA. We verify that k -NN can outperform SynBERT under these conditions, but only for the more lexical-oriented relations in WordNet. For ConceptNet, the source most strictly related to commonsense knowledge, we find verbalized queries provide a clear advantage over k -NN. To a lesser extent, the encyclopedic triples of WikiData are also more accurately predicted with SynBERT. This finding is in line with previous work comparing relational knowledge in BERT ([Bouraoui et al., 2020](#)).

	WordNet			WikiData			ConceptNet			All		
	P@1	P@10	MRR	P@1	P@10	MRR	P@1	P@10	MRR	P@1	P@10	MRR
Distance-based (k-NN)												
ARES	17.87	58.91	31.07	9.56	36.76	18.27	3.97	20.45	9.31	12.58	44.31	22.80
LMMS SP-USM	26.12	63.18	38.19	8.09	34.56	16.67	3.10	17.44	7.97	17.16	45.71	26.53
Template-based (LM)												
ARES	19.86	46.96	29.08	13.24	38.97	21.94	9.69	36.05	17.63	15.97	42.74	24.71
LMMS SP-USM	21.17	49.57	30.39	12.50	37.50	20.72	10.17	36.14	18.60	16.89	44.27	25.78

Table 5: Performance comparison on SenseLAMA (Core) using the baseline k -NN distance-based method (ignores relation) and the masked LM template-based method (verbalizes relation). For fair comparison, gloss prepending (see subsection 4.3) is not used for LM results.

6.3 Degradation from Mapping

Our SynBERT model features sense embeddings that result from the straightforward linear mapping of embeddings pooled from all layers into the vocabulary embedding space (see subsection 4.2).

For this analysis, we estimate the performance impact of this mapping procedure by comparing the performance of mapped and unmapped LMMS sense embeddings on the k -NN baseline for SenseLAMA (described on subsection 6.2).

Results on Table 6 show that while the procedure is simple, mapped embeddings retain very similar performance to their original versions, with around 5% degradation on P@1, P@10, and MRR.

	P@1	P@10	MRR
Original	17.16	45.71	26.53
Mapped	16.21 (-5.5%)	44.21 (-3.3%)	25.31 (-4.6%)

Table 6: Performance comparison on SenseLAMA (Core) using k -NN with original and mapped LMMS SP-USM embeddings.

7 Conclusion

We have shown that commonsense knowledge learned during LM pre-training can be probed more precisely and extensively using sense embedding learned from grounded ontologies, compared to prior work such as LAMA, which is limited to a subset of the LM’s word-level vocabulary.

The proposed SynBERT model, adapted from BERT, along with SenseLAMA, our new probing task grounded on WordNet, provide clearer insights into which commonsense relations are best understood by LMs, and how the commonsense

domain compares against more lexical or encyclopedic knowledge. We also explore how SynBERT, or similar models, can be used to extract novel CKGs which may support recent hybrid methods fusing CKGs and LMs (e.g., Zhang et al., 2022), or enable symbolic-first methods (e.g., Huang et al., 2021) to leverage precise commonsense knowledge learned from self-supervision by LMs.

This paper is focused on establishing our approach using BERT as our reference model, due to its popularity related to probing LMs. We leave a thorough comparison between BERT and alternative LMs for future work.

Limitations

Although commonsense knowledge should remain mostly unchanged over time, the sense representations introduced in SynBERT, and targeted by SenseLAMA, are limited to the release date of WordNet v3.0 (2006). As noted by Eyal et al. (2022), novel concepts that have recently become mainstream (e.g., covid) are missing from WordNet, therefore our contributions also do not cover these more recent concepts and relations. Finally, this work should also not be considered from the standpoint of improving LM performance on downstream tasks (e.g., SuperGLUE). Since the sense embeddings used are based on internal states of the LM, their integration at the vocabulary-level is not expected to add new information to the LM.

Reproducibility

SynBERT, SenseLAMA, and related code, are freely available at <https://github.com/danlou/synbert> (MIT License). Reported experiments run in under 3 hours on a RTX 3090, using a maximum of 12GB VRAM. SynBERT, with the full set of 117k synsets, contains 454M parameters.

References

- Carlos Aspillaga, Marcelo Mendoza, and Alvaro Soto. 2021. [Tracking the progress of language models by extracting their underlying knowledge graphs](#).
- Edoardo Barba, Tommaso Pasini, and Roberto Navigli. 2021. [ESC: Redesigning WSD with extractive sense comprehension](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 4661–4672, Online. Association for Computational Linguistics.
- Yonatan Bisk, Rowan Zellers, Ronan Le Bras, Jianfeng Gao, and Yejin Choi. 2020. [Piqa: Reasoning about physical commonsense in natural language](#). In *Thirty-Fourth AAAI Conference on Artificial Intelligence*.
- Antoine Bosselut, Hannah Rashkin, Maarten Sap, Chaitanya Malaviya, Asli Celikyilmaz, and Yejin Choi. 2019. [COMET: Commonsense transformers for automatic knowledge graph construction](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 4762–4779, Florence, Italy. Association for Computational Linguistics.
- Zied Bouraoui, José Camacho-Collados, and Steven Schockaert. 2020. [Inducing relational knowledge from bert](#). In *AAAI*.
- Jordan Boyd-Graber, Christiane Fellbaum, Daniel Hershey, and Robert Schapire. 2005. [Adding dense, weighted connections to wordnet](#). In *GWC 2006, GWC 2006: 3rd International Global WordNet Conference, Proceedings*, pages 29–35. Masaryk University. 3rd International Global WordNet Conference, GWC 2006 ; Conference date: 22-01-2006 Through 26-01-2006.
- Ruben Branco, António Branco, João António Rodrigues, and João Ricardo Silva. 2021. [Shortcutted commonsense: Data spuriousness in deep learning of commonsense reasoning](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 1504–1521, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel Ziegler, Jeffrey Wu, Clemens Winter, Chris Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. [Language models are few-shot learners](#). In *Advances in Neural Information Processing Systems*, volume 33, pages 1877–1901. Curran Associates, Inc.
- Yohan Chalier, Simon Razniewski, and Gerhard Weikum. 2020. [Joint reasoning for multi-faceted commonsense knowledge](#). In *Automated Knowledge Base Construction*.
- Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, Parker Schuh, Kensen Shi, Sasha Tsvyashchenko, Joshua Maynez, Abhishek Rao, Parker Barnes, Yi Tay, Noam Shazeer, Vinodkumar Prabhakaran, Emily Reif, Nan Du, Ben Hutchinson, Reiner Pope, James Bradbury, Jacob Austin, Michael Isard, Guy Gur-Ari, Pengcheng Yin, Toju Duke, Anselm Levskaya, Sanjay Ghemawat, Sunipa Dev, Henryk Michalewski, Xavier Garcia, Vedant Misra, Kevin Robinson, Liam Fedus, Denny Zhou, Daphne Ippolito, David Luan, Hyeontaek Lim, Barret Zoph, Alexander Spiridonov, Ryan Sepassi, David Dohan, Shivani Agrawal, Mark Omernick, Andrew M. Dai, Thanumalayan Sankaranarayanan Pillai, Marie Pellat, Aitor Lewkowycz, Erica Moreira, Rewon Child, Oleksandr Polozov, Katherine Lee, Zongwei Zhou, Xuezhi Wang, Brennan Saeta, Mark Diaz, Orhan Firat, Michele Catasta, Jason Wei, Kathy Meier-Hellstern, Douglas Eck, Jeff Dean, Slav Petrov, and Noah Fiedel. 2022. [Palm: Scaling language modeling with pathways](#).
- Bhavana Dalvi Mishra, Niket Tandon, and Peter Clark. 2017. [Domain-targeted, high precision knowledge extraction](#). *Transactions of the Association for Computational Linguistics*, 5:233–246.
- Joe Davison, Joshua Feldman, and Alexander Rush. 2019. [Commonsense knowledge mining from pre-trained models](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 1173–1178, Hong Kong, China. Association for Computational Linguistics.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: Pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.
- Philipp Dufter, Nora Kassner, and Hinrich Schütze. 2021. [Static embeddings as efficient knowledge bases?](#) In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 2353–2363, Online. Association for Computational Linguistics.
- Matan Eyal, Shoval Sadde, Hillel Taub-Tabib, and Yoav Goldberg. 2022. [Large scale substitution-based word sense induction](#). In *Proceedings of the*

- 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), pages 4738–4752, Dublin, Ireland. Association for Computational Linguistics.
- Yanlin Feng, Xinyue Chen, Bill Yuchen Lin, Peifeng Wang, Jun Yan, and Xiang Ren. 2020. Scalable multi-hop relational reasoning for knowledge-aware question answering. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 1295–1309, Online. Association for Computational Linguistics.
- Catherine Havasi, Robyn Speer, James Pustejovsky, and Henry Lieberman. 2009. Digital intuition: Applying common sense using dimensionality reduction. *IEEE Intelligent systems*, 24(4):24–35.
- Jiani Huang, Ziyang Li, Binghong Chen, Karan Samel, Mayur Naik, Le Song, and Xujie Si. 2021. Scallop: From probabilistic deductive databases to scalable differentiable reasoning. In *Advances in Neural Information Processing Systems*, volume 34, pages 25134–25145. Curran Associates, Inc.
- Jena D. Hwang, Chandra Bhagavatula, Ronan Le Bras, Jeff Da, Keisuke Sakaguchi, Antoine Bosselut, and Yejin Choi. 2021. Comet-atomic 2020: On symbolic and neural commonsense knowledge graphs. In *AAAI*.
- Stanislaw Jastrzębski, Dzmitry Bahdanau, Seyedarian Hosseini, Michael Noukhovitch, Yoshua Bengio, and Jackie Cheung. 2018. Commonsense mining as knowledge base completion? a study on the impact of novelty. In *Proceedings of the Workshop on Generalization in the Age of Deep Learning*, pages 8–16, New Orleans, Louisiana. Association for Computational Linguistics.
- Nora Kassner and Hinrich Schütze. 2020. Negated and misprimed probes for pretrained language models: Birds can talk, but cannot fly. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 7811–7818, Online. Association for Computational Linguistics.
- Mike Lewis, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Veselin Stoyanov, and Luke Zettlemoyer. 2020. BART: Denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 7871–7880, Online. Association for Computational Linguistics.
- Xiang Li, Aynaz Taheri, Lifu Tu, and Kevin Gimpel. 2016. Commonsense knowledge base completion. In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1445–1455, Berlin, Germany. Association for Computational Linguistics.
- Daniel Loureiro, Alípio Mário Jorge, and Jose Camacho-Collados. 2022. Lmms reloaded: Transformer-based sense embeddings for disambiguation and beyond. *Artificial Intelligence*, 305:103661.
- Daniel Loureiro, Kiamehr Rezaee, Mohammad Taher Pilehvar, and Jose Camacho-Collados. 2021. Analysis and evaluation of language models for word sense disambiguation. *Computational Linguistics*, 47(2):387–443.
- John P. McCrae and David Cillessen. 2021. Towards a linking between WordNet and Wikidata. In *Proceedings of the 11th Global Wordnet Conference*, pages 252–257, University of South Africa (UNISA). Global Wordnet Association.
- Stephen Merity, Caiming Xiong, James Bradbury, and Richard Socher. 2016. Pointer sentinel mixture models. *CoRR*, abs/1609.07843.
- Todor Mihaylov, Peter Clark, Tushar Khot, and Ashish Sabharwal. 2018. Can a suit of armor conduct electricity? a new dataset for open book question answering. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2381–2391, Brussels, Belgium. Association for Computational Linguistics.
- George A. Miller. 1992. Wordnet: A lexical database for english. *Commun. ACM*, 38:39–41.
- Roberto Navigli and Simone Paolo Ponzetto. 2012. Babelnet: The automatic construction, evaluation and application of a wide-coverage multilingual semantic network. *Artificial Intelligence*, 193:217–250.
- Tuan-Phong Nguyen, Simon Razniewski, and Gerhard Weikum. 2021. Advanced semantics for commonsense knowledge extraction. *Proceedings of the Web Conference 2021*.
- Yixin Nie, Adina Williams, Emily Dinan, Mohit Bansal, Jason Weston, and Douwe Kiela. 2020. Adversarial NLI: A new benchmark for natural language understanding. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 4885–4901, Online. Association for Computational Linguistics.
- Fabio Petroni, Tim Rocktäschel, Sebastian Riedel, Patrick Lewis, Anton Bakhtin, Yuxiang Wu, and Alexander Miller. 2019. Language models as knowledge bases? In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 2463–2473, Hong Kong, China. Association for Computational Linguistics.
- Nina Poerner, Ulli Waltinger, and Hinrich Schütze. 2020. E-BERT: Efficient-yet-effective entity embeddings for BERT. In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 803–818, Online. Association for Computational Linguistics.

- Maarten Sap, Ronan Le Bras, Emily Allaway, Chandra Bhagavatula, Nicholas Lourie, Hannah Rashkin, Brendan Roof, Noah A. Smith, and Yejin Choi. 2019. [ATOMIC: an atlas of machine commonsense for if-then reasoning](#). In *The Thirty-Third AAAI Conference on Artificial Intelligence, AAAI 2019, The Thirty-First Innovative Applications of Artificial Intelligence Conference, IAAI 2019, The Ninth AAAI Symposium on Educational Advances in Artificial Intelligence, EAAI 2019, Honolulu, Hawaii, USA, January 27 - February 1, 2019*, pages 3027–3035. AAAI Press.
- Bianca Scarlini, Tommaso Pasini, and Roberto Navigli. 2020. [With more contexts comes better performance: Contextualized sense embeddings for all-round word sense disambiguation](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 3528–3539, Online. Association for Computational Linguistics.
- Timo Schick and Hinrich Schütze. 2020. [BERTRAM: Improved word embeddings have big impact on contextualized model performance](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 3996–4007, Online. Association for Computational Linguistics.
- Robyn Speer, Joshua Chin, and Catherine Havasi. 2017. Conceptnet 5.5: An open multilingual graph of general knowledge. In *Proceedings of the Thirty-First AAAI Conference on Artificial Intelligence, AAAI 17*, page 4444–4451. AAAI Press.
- Robyn Speer, Joshua Chin, Andrew Lin, Sara Jewett, and Lance Nathan. 2018. [Luminosinsight/wordfreq: v2.2](#).
- Shane Storcks, Qiaozi Gao, and Joyce Y. Chai. 2019. [Commonsense reasoning for natural language understanding: A survey of benchmarks, resources, and approaches](#). *CoRR*, abs/1904.01172.
- Vinitra Swamy, Angelika Romanou, and Martin Jaggi. 2021. [Interpreting language models through knowledge graph extraction](#). In *eXplainable AI approaches for debugging and diagnosis*.
- Alon Talmor, Jonathan Herzig, Nicholas Lourie, and Jonathan Berant. 2019. [CommonsenseQA: A question answering challenge targeting commonsense knowledge](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4149–4158, Minneapolis, Minnesota. Association for Computational Linguistics.
- Niket Tandon, Gerard de Melo, Fabian Suchanek, and Gerhard Weikum. 2014. [Webchild: Harvesting and organizing commonsense knowledge from the web](#). In *Proceedings of the 7th ACM International Conference on Web Search and Data Mining, WSDM '14*, page 523–532, New York, NY, USA. Association for Computing Machinery.
- Denny Vrandečić and Markus Krötzsch. 2014. [Wikidata: A free collaborative knowledgebase](#). *Commun. ACM*, 57(10):78–85.
- Peifeng Wang, Filip Ilievski, Muhao Chen, and Xiang Ren. 2021. [Do language models perform generalizable commonsense inference?](#) In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pages 3681–3688, Online. Association for Computational Linguistics.
- Peifeng Wang, Nanyun Peng, Filip Ilievski, Pedro Szekely, and Xiang Ren. 2020. [Connecting the dots: A knowledgeable path generator for commonsense question answering](#). In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 4129–4140, Online. Association for Computational Linguistics.
- Peter West, Chandra Bhagavatula, Jack Hessel, Jena D. Hwang, Liwei Jiang, Ronan Le Bras, Ximing Lu, Sean Welleck, and Yejin Choi. 2021. [Symbolic knowledge distillation: from general language models to commonsense models](#). *CoRR*, abs/2110.07178.
- Yichong Xu, Chenguang Zhu, Ruochen Xu, Yang Liu, Michael Zeng, and Xuedong Huang. 2021. [Fusing context into knowledge graph for commonsense question answering](#). In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pages 1201–1207, Online. Association for Computational Linguistics.
- Michihiro Yasunaga, Hongyu Ren, Antoine Bosselut, Percy Liang, and Jure Leskovec. 2021. [QA-GNN: Reasoning with language models and knowledge graphs for question answering](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 535–546, Online. Association for Computational Linguistics.
- Xikun Zhang, Antoine Bosselut, Michihiro Yasunaga, Hongyu Ren, Percy Liang, Christopher D Manning, and Jure Leskovec. 2022. [GreaseLM: Graph Reasoning enhanced language models](#). In *International Conference on Learning Representations*.

A Templates

Templates used for WordNet and WikiData triples are available in [Table 7](#). In order to make predictions more consistent across sources, we found the most frequent determiners used with the head and tail terms of ConceptNet assertions and applied them on the WordNet and WikiData queries, wherever those same head and tail terms occurred.

B Extraction Statistics

[Table 8](#) reports the relation counts for triples extracted using the procedure described on [subsection 5.2](#).

C SenseLAMA without gloss information

[Table 9](#) reports results by relation on SenseLAMA (Full) when not prepending glosses or averaging sense embeddings with gloss embedding. This is intended to better demonstrate which relations are most affected by the use of glosses, besides their overall impact on this probing task.

Source	Relation	Template	Example Pair ([H]ead, [T]ail)	
WordNet	Hypernym	[H] is a type of [T]	medicine _n ²	drug _n ¹
	Holonym (Member)	[H] is a member of [T]	princess _n ¹	royalty _n ²
	Holonym (Part)	[H] is part of [T]	jaw _n ¹	skull _n ¹
	Antonym	[H] is the opposite of [T]	straight _n ⁸	curved _a ¹
	Hypernym (Instance)	[H] is an example of [T]	sahara _n ¹	desert _n ¹
	Meronym (Substance)	[H] is made of [T]	bread _n ¹	flour _n ¹
WikiData	P31 (Instance of)	[H] is an example of [T]	capitalism _n ¹	political_orientation _n ¹
	P361 (Part of)	[H] is part of [T]	regulation _n ¹	politics _n ¹
	P366 (Use)	[H] is used for [T]	vegetable_oil _n ¹	makeup _n ¹
	P186 (Made from)	[H] is made from [T]	eiffel_tower _n ¹	wrought_iron _n ¹
	P461 (Opposite of)	[H] is the opposite of [T]	technophilia _n ¹	technophobia _n ¹
	P737 (Influenced by)	[H] is influenced by [T]	mozart _n ¹	bach _n ¹
	P2283 (Uses)	[H] uses [T]	oil_painting _n ¹	oil_paint _n ¹
	P463 (Member of)	[H] is a member of [T]	taiwan _n ¹	world_trade_organization _n ¹
	P1535 (Used by)	[H] is used by [T]	rocket_fuel _n ¹	rocket _n ²
P279 (Subclass of)	[H] is a type of [T]	baroque _n ¹	expressive_style _n ¹	

Table 7: Templates used to verbalize triples from WordNet and WikiData. Not required for our ConceptNet subset.

Relation	Count
IsA	6,557
AtLocation	5,104
PartOf	2,559
UsedFor	2,523
MadeOf	1,293
Causes	680
CausesDesire	663
HasPrerequisite	659
HasA	644
CapableOf	534
MotivatedByGoal	532
HasProperty	424
CreatedBy	390
Desires	229
HasSubevent	161
ReceivesAction	77
HasLastSubevent	53
HasFirstSubevent	6

Table 8: Relation counts for novel triples extracted.

	Core (4,960 candidates)					Full (117,659 candidates)					
	P@1	P@3	P@10	P@100	MRR	P@1	P@3	P@10	P@100	P@1000	MRR
All	14.39	25.85	40.62	67.04	23.04	2.71	5.36	9.73	21.68	40.25	5.07
WordNet	17.53	29.88	36.48	44.39	26.46	3.00	5.69	9.89	20.86	37.83	5.32
<i>Hypernym</i>	14.52	25.62	31.37	38.90	22.67	2.76	6.28	12.70	28.97	47.23	5.99
<i>Holonym (Member)</i>	19.23	38.46	57.69	84.62	32.02	0.39	0.68	1.61	5.60	24.05	0.87
<i>Holonym (Part)</i>	11.03	27.59	49.66	74.48	22.94	7.76	12.86	19.29	36.62	57.88	11.78
<i>Antonym</i>	34.04	48.94	64.54	78.01	44.43	3.30	6.16	9.80	19.01	30.42	5.55
<i>Hypernym (Instance)</i>	-	-	-	-	-	1.21	3.32	7.23	14.21	26.87	3.04
<i>Meronym (Substance)</i>	25.00	43.75	62.50	87.50	37.89	0.91	1.67	3.80	16.87	38.15	2.11
WikiData	10.29	22.06	36.76	63.24	19.46	1.50	3.52	8.10	22.63	46.44	3.67
<i>P31 (Instance of)</i>	5.13	10.26	23.08	46.15	10.51	0.67	2.26	5.19	16.81	37.30	2.31
<i>P361 (Part of)</i>	11.11	20.00	44.44	73.33	20.85	1.98	4.02	9.44	27.21	54.06	4.43
<i>P366 (Use)</i>	3.70	25.93	25.93	51.85	15.31	1.97	3.41	9.04	24.51	46.92	4.05
<i>P186 (Made from)</i>	26.67	33.33	46.67	80.00	34.34	1.72	3.76	9.08	25.35	53.05	4.06
<i>P461 (Opposite of)</i>	20.00	50.00	70.00	90.00	37.02	4.99	10.38	20.36	38.12	59.28	9.69
<i>P737 (Influenced by)</i>	-	-	-	-	-	0.95	2.53	4.43	14.24	43.99	2.29
<i>P2283 (Uses)</i>	-	-	-	-	-	1.12	2.99	8.21	20.15	44.78	3.31
<i>P463 (Member of)</i>	-	-	-	-	-	1.64	6.01	14.75	46.99	84.15	5.91
<i>P1535 (Used by)</i>	-	-	-	-	-	0.00	1.32	5.30	15.23	49.01	1.46
<i>P279 (Subclass of)</i>	-	-	-	-	-	1.52	1.52	3.03	22.73	40.91	2.83
ConceptNet	9.59	19.48	34.69	67.64	17.67	1.84	5.20	11.21	29.23	55.78	4.93
<i>AtLocation</i>	9.15	18.29	33.54	72.87	17.08	2.29	6.08	12.45	31.47	62.65	5.54
<i>UsedFor</i>	4.32	12.96	29.01	66.05	11.99	1.51	3.63	9.53	27.08	56.43	4.09
<i>IsA</i>	19.17	31.67	52.50	71.67	28.78	0.98	6.64	14.06	37.50	61.13	5.44
<i>Causes</i>	7.89	13.16	21.05	39.47	12.51	0.89	1.79	4.91	16.96	35.27	2.22
<i>HasSubevent</i>	0.00	8.77	17.54	29.82	5.88	0.98	0.98	2.44	10.24	21.46	1.49
<i>HasPrerequisite</i>	8.00	16.00	32.00	62.00	14.71	1.21	4.24	10.30	29.09	53.94	4.37
<i>HasProperty</i>	0.00	10.64	27.66	80.85	9.45	1.27	5.10	7.01	32.48	60.51	4.36
<i>CapableOf</i>	6.25	12.50	22.92	66.67	12.29	0.81	3.25	11.38	21.95	47.97	3.82
<i>MotivatedByGoal</i>	10.81	37.84	54.05	86.49	27.02	5.77	12.50	27.88	49.04	70.19	12.30
<i>HasA</i>	14.58	16.67	39.58	62.50	20.76	3.09	10.31	14.43	31.96	62.89	7.28
<i>PartOf</i>	39.39	51.52	63.64	93.94	47.47	11.25	16.25	30.00	42.50	75.00	16.43
<i>CausesDesire</i>	0.00	0.00	14.29	50.00	3.41	0.00	0.00	1.92	13.46	30.77	0.63
<i>ReceivesAction</i>	21.05	31.58	36.84	52.63	28.18	0.00	0.00	4.55	20.45	38.64	1.29
<i>MadeOf</i>	5.56	38.89	55.56	88.89	24.40	0.00	0.00	9.52	33.33	57.14	2.63
<i>Desires</i>	0.00	7.69	7.69	53.85	5.54	0.00	7.14	10.71	10.71	50.00	3.65
<i>CreatedBy</i>	-	-	-	-	-	0.00	11.76	11.76	29.41	70.59	5.62
<i>HasFirstSubevent</i>	-	-	-	-	-	0.00	0.00	0.00	50.00	85.71	2.27
<i>HasLastSubevent</i>	-	-	-	-	-	0.00	0.00	0.00	16.67	41.67	0.85

Table 9: Complete results on the SenseLAMA probing task using BERT Large with LMMS SP-USM sense embeddings, not averaged with gloss embeddings and without prepending glosses to assertions, in contrast to Table 3. Reporting Precision at k (P@k) and Mean Reciprocal Rank (MRR). Sorted by P@1 on the Full set.