

Exploring Energy-Based Models for Out-of-Distribution Detection in Dialect Identification

Yaqian Hao[†], Chenguang Hu[†], Yingying Gao, Shilei Zhang*, Junlan Feng*

China Mobile Research Institute, Beijing, China

{haoyaqian, huchenguang, gaoyingying, zhangshilei, fengjunlan}@chinamobile.com

Abstract

The diverse nature of dialects presents challenges for models trained on specific linguistic patterns, rendering them susceptible to errors when confronted with unseen or out-of-distribution (OOD) data. This study introduces a novel margin-enhanced joint energy model (MEJEM) tailored specifically for OOD detection in dialects. By integrating a generative model and the energy margin loss, our approach aims to enhance the robustness of dialect identification systems. Furthermore, we explore two OOD scores for OOD dialect detection, and our findings conclusively demonstrate that the energy score outperforms the softmax score. Leveraging Sharpness-Aware Minimization to optimize the training process of the joint model, we enhance model generalization by minimizing both loss and sharpness. Experiments conducted on dialect identification tasks validate the efficacy of Energy-Based Models and provide valuable insights into their performance.

Index Terms: Energy-based models, out of distribution detection, dialect identification, open set classification

* †

1. Introduction

Speech dialect is fundamental in various real-world scenarios, such as enhancing automatic speech recognition systems and facilitating language translation services [1, 2]. The accurate identification of spoken dialects is imperative for delivering tailored and contextually appropriate services. Nevertheless, practical applications often encounter unknown dialects and languages, presenting a significant challenge. Therefore, models employed for dialect identification require the capability to discern out-set data, ensuring robustness and reliability, and preventing inaccurate predictions for unseen dialects across diverse linguistic contexts [3, 4, 5]. One approach to OOD detection employs the classifier-based method, which distinguishes OOD samples by analyzing the prediction outputs of the logits. However, the softmax confidence score may encounter challenges in reliably distinguishing between in-distribution (ID) and OOD data [6, 7]. Another OOD detection strategy is the density-based method, which estimates the likelihood score $\log p(x)$ of the training data and rejects samples with low likelihood scores. Nonetheless, this method is susceptible to issues associated with overestimating data density. Energy-based models (EBMs), a promising class of density estimators known for their unrestricted architecture, have demonstrated potential in OOD detection [8, 9]. Additionally, EBMs and softmax-based classifiers are related through the utilization of the softmax function,

which transforms energy functions into probability distributions [6, 10]. Consequently, leveraging EBMs enables simultaneous exploration of classifier-based and density-based OOD detection methodologies.

In this study, we first propose a margin-enhanced joint energy model incorporating a discriminative classification model, energy-based margin loss and a generative model for dialect identification. We investigate the effectiveness of energy functions in outlier detection, and we further assess the OOD detection performance by leveraging energy score and softmax score. We conduct numerical experiments on dialect OOD detection task, optimizing model training with the Sharpness-Aware Minimization (SAM) approach. The results demonstrate the effectiveness of the proposed energy model, and show that energy score outperforms traditional softmax score. Additionally, the ablation study investigates the impact of margin loss and SAM methods to the performance of dialect OOD detection. Our findings indicate despite the inclusion of auxiliary datasets in OE, EBMs achieves comparable performance, hinting at their innate advantage in dialect OOD detection.

Our contributions can be summarized as follows:

1. We propose a margin-enhanced energy joint model (MEJEM) for dialect OOD detection that integrates an energy regularization loss and a generative model. Furthermore, we apply the SAM method to improve the optimization of proposed joint model.
2. We introduce a variety of EBMs for dialect OOD detection and conduct comprehensive experiments to analyze their performance in dialect OOD detection tasks, demonstrating their effectiveness.
3. We further investigate the efficacy of energy score and softmax score of different models on dialect OOD detection, finding that the energy score yields superior performance.

2. Related Work

Classifier-based and Density-based OOD detection. The classifier-based OOD detection methods, encompasses various techniques such as the maximum softmax score, ODIN, maximum logits score, and maximum entropy predictions [11, 12]. [13] refined this methodology by employing temperature scaling techniques. These methods leverage the output probabilities of the neural network classifier to discern between ID and OOD samples. In contrast, Density-based OOD detection methods focus on modeling the underlying data distribution [14, 15] or estimating the distribution over activations at multiple layers of the neural network [16, 17]. These techniques, employing density estimation or generative modeling, aim to detect out-set samples by comparing the distributions of ID and OOD data.

OOD detection with EBMs. As efficient training methods for

*Corresponding Author.

[†]Equal Contribution.

deep EBMs have advanced, there has been a growing interest in utilizing EBMs for detecting OOD data. [6] introduced energy scores, showing their superiority over softmax scores, especially in image datasets. Joint EBMs, proposed by [10], have shown effectiveness in OOD detection tasks, open-world EBMs were introduced by [18] subsequently. Further efforts include optimizing EBM training to mitigate OOD data density overestimation [19], and developing energy-based meta-learning frameworks for robust OOD task generalization [20].

However, research on speech dialect OOD detection is relatively limited [4], and there exists no previous work that has examined the application of EBMs for this particular task. In this study, we present MEJEM framework combining energy-based margin loss with joint energy model and assess the efficacy of EBMs within the domain of dialect identification.

3. Method

3.1. Energy-based Models

EBMs are probabilistic models defined by energy function $E(\mathbf{x}; \theta)$, where \mathbf{x} represents the input data and θ denotes the model parameters [8, 21]. The probability distribution derived from the Boltzmann distribution, is given by:

$$p(\mathbf{x}; \theta) = \frac{1}{Z(\theta)} \exp(-E(\mathbf{x}; \theta)), \quad (1)$$

where $Z(\theta) = \int_{\mathbf{x}} \exp(-E(\mathbf{x}; \theta)) d\mathbf{x}$, is the partition function. For a discriminative classifier, which map input data \mathbf{x} to class logits $f(\mathbf{x})$ using the softmax function, the probability of class y given input \mathbf{x} is calculated as:

$$p(y|\mathbf{x}) = \frac{\exp(f(\mathbf{x})[y])}{\sum_i^K \exp(f(\mathbf{x})[i])}, \quad (2)$$

where K is the number of classes. This mapping allows us to interpret the classifier $f(\mathbf{x})$ as an energy function $E(\mathbf{x}, y) = -f(\mathbf{x})[y]$ within the EBM framework [10, 6]. Furthermore, the logits $f(\mathbf{x})$ facilitate the formulation of an EBM for the joint distribution of data point (\mathbf{x}, y) : $p(\mathbf{x}, y) = \exp(f(\mathbf{x})[y])/Z(\theta)$. Marginalizing over y yields an unnormalized density model for \mathbf{x} :

$$p(\mathbf{x}) = \sum_y p(\mathbf{x}, y) = \sum_y \frac{\exp(f(\mathbf{x})[y])}{Z(\theta)}, \quad (3)$$

thus defining an EBM.

3.2. Joint Margin-based Energy Model

Motivation. The perspective illustrated in Eq. (2) to Eq. (3) underscores the inherent compatibility between the softmax classifier and the EBM, facilitating a unified understanding of their shared principles. It has been demonstrated that the joint EBM (JEM) framework could significantly enhance OOD detection performance for image classification while preserving classification precision [10]. The log-likelihood $p(\mathbf{x}, y)$ in JEM serves as a unified objective function, encompassing both classification loss and the likelihood score derived from the generative model, thereby providing a comprehensive evaluation of ID data. However, the energy function $E(\mathbf{x}; \theta)$ solely focuses on capturing the density of training data, thus lacking knowledge of the boundary between ID data and OOD data. To address this limitation, leveraging the energy function with auxiliary outlier data can enhance the model’s capability to identify OOD.

Margin-Enhanced Joint Energy Model (MEJEM). Inspired by the motivation above, we propose a margin-enhanced joint energy model, which integrates a discriminative model, a generative model, and energy-based margin loss. The objective function of MEJEM is:

$$L(\theta) = \log p(y|\mathbf{x}) + \lambda_1 \log p(\mathbf{x}) + \lambda_2 L_e, \quad (4)$$

where λ_1 and λ_2 are hyperparameters balancing the cross-entropy loss, generative loss, and energy-based margin loss.

Hybrid Energy-based Margin Loss. Outlier data training may lead to a broader distribution of errors due to the presence of anomalies or noise in OOD data. To address this issue, we present a hybrid energy-based margin loss function that combines hinge loss and square loss, incorporating auxiliary outlier data during training. For each sample x_i , the hybrid energy loss is defined as follows:

$$L_e(x_i) = \begin{cases} (\max(E_{x_i} - M_{ID}, 0))^2, & \text{if } (x_i, y_i) \in D_{ID}, \\ \max(M_{OOD} - E_{x_i}, 0), & \text{if } (x_i, y_i) \in D_{OOD}, \end{cases} \quad (5)$$

where D_{ID} and D_{OOD} denote the ID and OOD training samples, respectively, with K classes for ID training data. We utilize linear hinge loss for OOD data and square hinge loss for ID data, achieving a balanced approach with moderate error penalties to mitigate overfitting risks. Thus, the total energy-based margin loss is given as following:

$$L_e = \sum_{D_{in} \cup D_{out}} L_e(x_i). \quad (6)$$

3.3. Classifier-based and Energy-based OOD

Classifier-based OOD detection methods rely on discriminative neural classifiers to distinguish between ID and OOD samples. Initially, class probabilities $P(y|\mathbf{x})$ are computed for an input sample \mathbf{x} using the softmax function in Eq. (2). Subsequently, the OOD score is determined as the maximum of class probabilities:

$$Score_c = \max_y P(y|\mathbf{x}). \quad (7)$$

The energy-based OOD score can be interpreted from a density perspective by utilizing the energy function, which represents the logarithm of the data density $p(\mathbf{x})$:

$$Score_e = -E(\mathbf{x}; f) = \log \sum_i^K \exp(f(\mathbf{x})[i]). \quad (8)$$

In both classifier-based and energy-based OOD detection methods, the label \hat{y} is predicted using a piecewise function based on the OOD score as follows:

$$\hat{y} = \begin{cases} K + 1 & \text{if OOD Score} < \delta, \\ \operatorname{argmax} P(y|\mathbf{x}) & \text{otherwise.} \end{cases} \quad (9)$$

If OOD score is below the threshold, \hat{y} becomes $K + 1$; otherwise, it belongs to the class with the highest probability $P(y|\mathbf{x})$.

3.4. Sharpness-aware minimization

To enhance the optimization of the joint objective function Eq. (4), we adopt Sharpness-Aware Minimization (SAM), a method that concurrently minimizes loss value and sharpness by identifying parameters within neighborhoods of uniformly low loss values [22]. This approach can help prevent EBMs

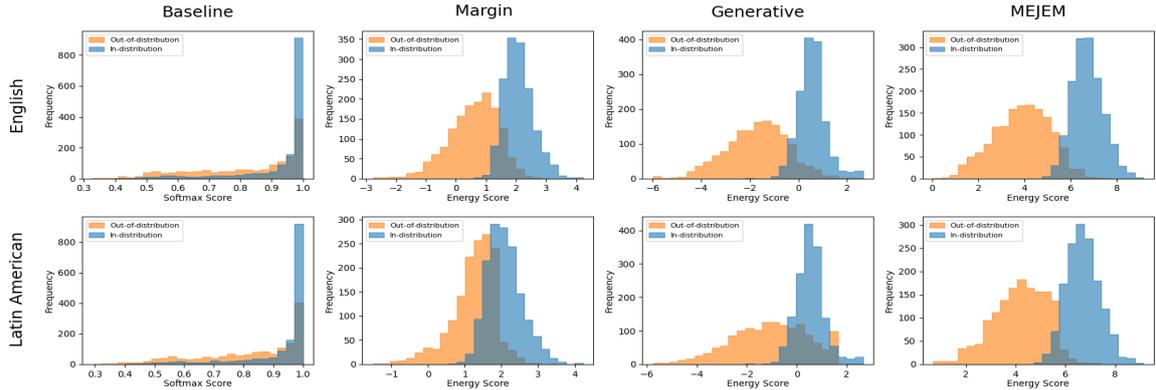


Figure 1: Comparison of OOD distribution.

from converging to excessively sharp local optima [22, 23]. By integrating SAM methods into MEJEM, the minimax objective function defined in Eq. (4) can be formulated as follows:

$$\max_{\|\theta\|_2 \leq \rho} \min_{\|\epsilon\|_2 \leq \rho} L(\theta + \epsilon) + \beta \|\theta\|_2^2, \quad (10)$$

where ρ denotes the radius of the L_2 norm ball centered at the model parameters θ , serving as a constraint on their deviation, while β represents a hyperparameter that tunes the intensity of L_2 regularization imposed upon θ .

3.5. Stochastic Gradient Langevin Dynamics

For the outer maximization of data distribution $p(x)$, we utilize SGLD to sample from $p(x)$. The process starts with sampling x_0 from a simple prior distribution and running an overdamped Langevin diffusion for K steps with a positive step size $\epsilon > 0$. The update for each step $k = 0, 1, \dots, K - 1$ is as follows:

$$x_{k+1} = x_k - \frac{\epsilon}{2} \nabla_{x_k} E(x_k) + \epsilon z_k, \quad (11)$$

where $\nabla_{x_k} E(x_k)$ is the gradient of the energy function with respect to x_k , and z_k is a random noise term. As $\epsilon \rightarrow 0$ and $K \rightarrow \infty$, the final sample x_K converges to $p(x)$ under certain regularity conditions.

4. Experiments

4.1. Datasets

We have used 4 open-source datasets OLR2021 (Oriental Language Recognition Challenge 2021) [24], UK and Ireland English Dialect speech dataset [25], Latin American Spanish corpus [26] and Common Voice [27]. OLR2021 includes 5 Chinese dialects which are used as fixed known classes for training. OOD samples are randomly selected from English dialect (Welsh, Scottish, Irish, Northern, Midlands, Southern) from [25] and Spanish dialect (Argentinian, Chilean, Colombian, Peruvian, Venezuelan and Puerto Rican) from [26] respectively for evaluation. We also select samples from [27] as auxiliary OOD data for outlier exposure training. More details on the respective train and test set are provided in Table 1.

4.2. Experimental Settings

All our experiments are based on the Wide-ResNet architecture [28], featuring a width of 3, depth of 22, SGLD [29] learning rate of 0.1, 15 sampling steps, batch size of 128,

and a buffer size of 10,000, with training conducted using the PyTorch toolkit. We optimize the model with stochastic gradient descent [30] optimizer, the learning rate warms up to 0.1 during the first 1000 steps, and is reduced at epoch [35, 70, 100] with a decay rate of 0.2. For the speech feature, a 192-frame segment is randomly chunked from each utterance. The input features are 32-dimensional Mel Filter-Banks (Fbanks) extracted using the librosa package [31] with a window length of 25ms and a shift of 10ms with Hamming window. Mean and variance normalization is applied to Fbanks. We also explored using SpecAugment [32], Noise and Reverberation for data augmentation to improve classification precision. However, this introduced significant instabilities during generative training, leading to early collapse.

Table 1: Dataset

Corpus	Class	Spk	Train_utt	Test_utt
OLR2021	Shanghainese	21	3000	300
	Sichuanese	21	3000	300
	Hokkien	27	3000	300
	Mandarin	24	3000	300
	Cantonese	24	3000	300
Common Voice	-	1000	31775	-
Latin American	6 Dialects	174	-	1500
English	6 Dialects	120	-	1500

Table 2: Close-set Performance

Model	Precision(%) \uparrow	Relative Change(%)
WideResNet	99.23	-
WideResnet(SAM)	99.36	+0.13%(\uparrow)
OE(SAM) [33]	99.36	+0.13%(\uparrow)
Energy Margin	98.91	-0.32%(\downarrow)
SADAJEM [23]	99.55	+0.32%(\uparrow)
JEMPP [34]	99.08	-0.15%(\downarrow)
MEJEM	98.64	-0.59%(\downarrow)

5. Results and Discussion

We introduce EBMs (JEMPP [34], SADAJEM [23], Energy Margin [6], MEJEM) for dialect OOD detection. Through conducting comprehensive experiments, our goal is to showcase the effectiveness of EBMs and energy-based OOD scores, as well as to analyze their performance in dialect OOD detection tasks.

5.1. OOD Detection Performance

Close-set performance. In close-set studies, EBMs show minimal precision decrease on in-set data compared to the baseline. Notably, SADAJEM achieves higher precision (99.55%) than

Table 3: OOD task Detection Performance

Model		Generative Model	Margin Loss	SAM Method	Auxiliary OOD data	Score Function	Latin American		English	
							AUROC \uparrow	FPR95 \downarrow	AUROC \uparrow	FPR95 \downarrow
WideResNet [28]						softmax	0.763	0.829	0.733	0.852
Softmax Model	WideResNet+SAM			✓		energy	0.684	0.812	0.589	0.936
						softmax	0.783	0.768	0.739	0.808
	OE [33]			✓	✓	energy	0.729	0.761	0.609	0.875
						softmax	0.812	0.731	0.795	0.779
JEMPP		✓				energy	0.763	0.716	0.772	0.779
Energy Model	SADAJEM			✓		softmax	0.595	0.905	0.527	0.929
						energy	0.770	0.589	0.836	0.401
	MEJEM	✓		✓	✓	softmax	0.752	0.865	0.729	0.874
			✓	✓	✓	energy	0.829	0.340	0.967	0.126
						softmax	0.784	0.784	0.774	0.758
						energy	0.925*	0.223*	0.987*	0.054*

softmax models (99.23%), highlighting its effectiveness. Additionally, the SAM method notably improves the baseline precision from 99.23% to 99.36%.

MEJEM performs best in OOD detection. In Table 3, MEJEM emerges as the top performer in OOD detection, achieving AUROC scores of 0.925 and 0.987 for two OOD datasets, with improvements of 24.1% and 33.6% over the baseline, respectively. Additionally, SADAJEM also performs well, with AUROC values of 0.829 and 0.967 for two dialects, respectively, while JEMPP excels specifically in English OOD detection, surpassing all the softmax models. MEJEM further improves results in another OOD detection metric, achieving significant reductions in FPR95, with reductions of 15.2% and 11.8%, outperforming the best baseline methods by 73.1% and 93.7%, for Latin American and English dialects, respectively.

MEJEM improves OOD detection when learning the generative model. MEJEM outperforms SADAJEM and JEMPP with AUROC scores of 0.925 and 0.987, along with lower FPR95 rates of 0.223 and 0.054 for Latin American and English dialects, respectively. This improvement is attributed to MEJEM’s integration of generative loss, energy-based margin loss, and the use of auxiliary datasets.

Energy Score vs. Softmax Score. The analysis from Table 2 and Table 3 provides the following insights:

1. EBMs demonstrate superior performance in OOD detection using energy scores, surpassing softmax models, despite the latter exhibiting higher precision on in-set data.
2. The performance of softmax-based OOD detection correlates closely with their precision and increases as precision rises.
3. Softmax models reach a ceiling in enhancing AUROC, suggesting limitations in their capability to detect OOD data.

Distribution of OOD detection. We conduct further analysis of OOD detection distribution by comparing the distributions of in-set and out-set data in Figure 1. It is observed that energy scores yield a smoother overall distribution, which is less susceptible to the peak distributions observed with softmax scores. Notably, EBMs utilizing energy scores enable a clearer differentiation between ID and OOD samples, thus facilitating more effective OOD detection.

5.2. Ablation Study

Ablation study of component in MEJEM. We conduct an ablation study on the components of MEJEM to evaluate their impact on OOD detection. In Table 4, including both the generative model and energy-based margin loss yields the highest AUROC values for Latin American and English dialects, using energy scores. The integration of the generative model enhances OOD detection performance compared to scenarios where it is excluded. Likewise, the presence of the energy-based margin

loss significantly improves OOD detection performance.

Impact of parameter variations. We investigate the impact of parameters on both inset-classification and OOD detection performance within the MEJEM framework. Table 5 presents the results of the ablation study conducted on the parameters M and $step$. Notably, varying the margin value (M) and the sampling step size ($step$) affects the performance metrics, with $M = -10$ and $step = 10$ yielding the highest AUROC and precision scores. Additionally, we explore the influence of loss weights λ_1 and λ_2 on dialect classification and OOD detection performance, as depicted in Table 5.

Table 4: Ablation Study Results for OOD Detection with SAM Optimization During Training. Values are AUROC.

Generative Model	Margin Loss	Softmax score / Energy score	
		Latin American	English
✓	✓	0.784/ 0.925	0.774/ 0.987
✓		0.752/0.829	0.728/0.967
	✓	0.711/0.875	0.737/0.968
		0.783/0.729	0.739/0.609

Table 5: Effect of Parameters (Sampling Step, λ_1 , Margin, λ_2).

Methods	Parameter	AUC(Latin)	AUC(English)	Precision
WideResNet	-	0.763	0.733	99.23%
	$S=5$	0.815	0.914	98.79%
	$S=10$	0.881	0.961	99.51%
	$S=15$	0.829	0.967	99.55%
+Generative Loss	$S=20$	0.834	0.834	99.87%
	$\lambda_1=0.3$	0.823	0.936	99.68%
	$\lambda_1=0.6$	0.833	0.945	99.59%
	$\lambda_1=1.0$	0.829	0.967	99.55%
	$\lambda_1=1.5$	0.831	0.945	99.72%
	$M=-5$	0.820	0.936	99.08%
+Margin Loss	$M=-10$	0.875	0.968	98.91%
	$M=-15$	0.830	0.894	98.24%
	$\lambda_2=0.03$	0.799	0.944	99.01%
	$\lambda_2=0.05$	0.875	0.968	98.91%
	$\lambda_2=0.10$	0.863	0.922	98.51%

6. Conclusion

In this study, we introduce EBMs for dialect OOD detection and propose a novel method named MEJEM. MEJEM combines generative loss with a hybrid energy-based margin loss, leveraging generative models to learn the density distribution of training data. The key idea is to assign low energy to ID data and high energy to OOD data, creating a clear energy gap between them. In addition, for dialect OOD detection, both energy scores and softmax scores suit different models. Despite high in-set accuracy, softmax scores hit a performance bottleneck in OOD detection. In contrast, energy scores achieve higher levels, underscoring the superior performance and potential of EBMs in addressing challenges in dialect OOD detection.

7. References

- [1] Q. Zhang and J. H. Hansen, "Language/dialect recognition based on unsupervised deep learning," *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, vol. 26, no. 5, pp. 873–882, 2018.
- [2] A. Das, K. Kumar, and J. Wu, "Multi-dialect speech recognition in english using attention on ensemble of experts," in *ICASSP 2021-2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2021, pp. 6244–6248.
- [3] F. R. Rakib, S. S. Dip, S. Alam, N. Tasnim, M. I. H. Shihab, M. N. Ansary, S. M. Hossen, M. H. Meghla, M. Mamun, F. Sadeque *et al.*, "Ood-speech: A large bengali speech recognition dataset for out-of-distribution benchmarking," *arXiv preprint arXiv:2305.09688*, 2023.
- [4] S. D. Das, Y. Vadi, A. Unnam, and K. Yadav, "Unsupervised out-of-distribution dialect detection with mahalanobis distance," *arXiv preprint arXiv:2308.04886*, 2023.
- [5] Y. Zheng, G. Chen, and M. Huang, "Out-of-domain detection for natural language understanding in dialog systems," *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, vol. 28, pp. 1198–1209, 2020.
- [6] W. Liu, X. Wang, J. Owens, and Y. Li, "Energy-based out-of-distribution detection," *Advances in neural information processing systems*, vol. 33, pp. 21 464–21 475, 2020.
- [7] Z. Lin, S. D. Roy, and Y. Li, "Mood: Multi-level out-of-distribution detection," in *Proceedings of the IEEE/CVF conference on Computer Vision and Pattern Recognition*, 2021, pp. 15 313–15 323.
- [8] Y. LeCun, S. Chopra, R. Hadsell, M. Ranzato, and F. Huang, "A tutorial on energy-based learning," *Predicting structured data*, vol. 1, no. 0, 2006.
- [9] Y. Song and D. P. Kingma, "How to train your energy-based models," *arXiv preprint arXiv:2101.03288*, 2021.
- [10] W. Grathwohl, K.-C. Wang, J.-H. Jacobsen, D. Duvenaud, M. Norouzi, and K. Swersky, "Your classifier is secretly an energy based model and you should treat it like one," in *International Conference on Learning Representations*, 2019.
- [11] D. Hendrycks and K. Gimpel, "A baseline for detecting misclassified and out-of-distribution examples in neural networks," *Proceedings of International Conference on Learning Representation*, 2017.
- [12] D. Hendrycks, S. Basart, M. Mazeika, A. Zou, J. Kwon, M. Mostajabi, J. Steinhardt, and D. Song, "Scaling out-of-distribution detection for real-world settings," in *International Conference on Machine Learning*, 2022.
- [13] Y.-C. Hsu, Y. Shen, H. Jin, and Z. Kira, "Generalized odin: Detecting out-of-distribution image without learning from out-of-distribution data," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2020, pp. 10 951–10 960.
- [14] S. Zhai, Y. Cheng, W. Lu, and Z. Zhang, "Deep structured energy based models for anomaly detection," in *International conference on machine learning*. PMLR, 2016, pp. 1100–1109.
- [15] S. Elflein, "Out-of-distribution detection with energy-based models," *arXiv preprint arXiv:2302.12002*, 2023.
- [16] E. Zisselman and A. Tamar, "Deep residual flow for out of distribution detection," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2020, pp. 13 994–14 003.
- [17] E. Nalisnick, A. Matsukawa, Y. W. Teh, D. Gorur, and B. Lakshminarayanan, "Do deep generative models know what they don't know?" *arXiv preprint arXiv:1810.09136*, 2018.
- [18] Y. Wang, B. Li, T. Che, K. Zhou, Z. Liu, and D. Li, "Energy-based open-world uncertainty modeling for confidence calibration," in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2021, pp. 9302–9311.
- [19] B. Kim and J. C. Ye, "Mitigating out-of-distribution data density overestimation in energy-based models," *arXiv preprint arXiv:2205.14817*, 2022.
- [20] S. Chen, L.-K. Huang, J. R. Schwarz, Y. Du, and Y. Wei, "Secure out-of-distribution task generalization with energy-based models," *Advances in Neural Information Processing Systems*, vol. 36, 2024.
- [21] Z. Ou *et al.*, "Energy-based models with applications to speech and language processing," *Foundations and Trends® in Signal Processing*, vol. 18, no. 1-2, pp. 1–199, 2024.
- [22] P. Foret, A. Kleiner, H. Mobahi, and B. Neyshabur, "Sharpness-aware minimization for efficiently improving generalization," in *International Conference on Learning Representations*, 2020.
- [23] X. Yang, Q. Su, and S. Ji, "Towards bridging the performance gaps of joint energy-based models," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023, pp. 15 732–15 741.
- [24] B. Wang, W. Hu, J. Li, Y. Zhi, Z. Li, Q. Hong, L. Li, D. Wang, L. Song, and C. Yang, "Olr 2021 challenge: Datasets, rules and baselines," in *2021 Asia-Pacific Signal and Information Processing Association Annual Summit and Conference (APSIPA ASC)*. IEEE, 2021, pp. 1097–1103.
- [25] I. Demirsahin, O. Kjartansson, A. Gutkin, and C. Rivera, "Open-source multi-speaker corpora of the english accents in the british isles," in *Proceedings of the Twelfth Language Resources and Evaluation Conference*, 2020, pp. 6532–6541.
- [26] A. Guevara-Rukoz, I. Demirsahin, F. He, S.-H. C. Chu, S. Sarin, K. Pipatsrisawat, A. Gutkin, A. Butryna, and O. Kjartansson, "Crowdsourcing latin american spanish for low-resource text-to-speech," in *Proceedings of the Twelfth Language Resources and Evaluation Conference*, 2020, pp. 6504–6513.
- [27] R. Ardila, M. Branson, K. Davis, M. Henretty, M. Kohler, J. Meyer, R. Morais, L. Saunders, F. M. Tyers, and G. Weber, "Common voice: A massively-multilingual speech corpus," *arXiv preprint arXiv:1912.06670*, 2019.
- [28] S. Zagoruyko and N. Komodakis, "Wide residual networks," *arXiv preprint arXiv:1605.07146*, 2016.
- [29] M. Welling and Y. W. Teh, "Bayesian learning via stochastic gradient langevin dynamics," in *Proceedings of the 28th international conference on machine learning (ICML-11)*. Citeseer, 2011, pp. 681–688.
- [30] L. Bottou, "Large-scale machine learning with stochastic gradient descent," in *Proceedings of COMPSTAT'2010: 19th International Conference on Computational Statistics Paris France, August 22-27, 2010 Keynote, Invited and Contributed Papers*. Springer, 2010, pp. 177–186.
- [31] B. McFee, C. Raffel, D. Liang, D. P. Ellis, M. McVicar, E. Battenberg, and O. Nieto, "librosa: Audio and music signal analysis in python," in *Proceedings of the 14th python in science conference*, vol. 8, 2015, pp. 18–25.
- [32] D. S. Park, W. Chan, Y. Zhang, C.-C. Chiu, B. Zoph, E. D. Cubuk, and Q. V. Le, "SpecAugment: A simple data augmentation method for automatic speech recognition," *arXiv preprint arXiv:1904.08779*, 2019.
- [33] D. Hendrycks, M. Mazeika, and T. Dietterich, "Deep anomaly detection with outlier exposure," *arXiv preprint arXiv:1812.04606*, 2018.
- [34] X. Yang and S. Ji, "Jem++: Improved techniques for training jem," in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2021, pp. 6494–6503.